

ALTERNATIVE  
FUEL SYSTEMS

# Prins



## installation manual Engine Kit part 2/2

MANUFACTURER	Kia
TYPE	Rio
ENGINE DISPLACEMENT	999cc
NUMBER OF VALVES	12
ENGINE CODE / NUMBER - OUTPUT	1.0 G3LC – 88kW
VEHICLE CATEGORIES	M1
TRANSMISSION	AT
AFC VERSION / SYSTEM	AFC-2.1 / DLM Gen3
PETROL ECU MANUFACTURER / CODE	Kefico 39199-04020 / CPEGD 2.20.2
HIGH PRESSURE PETROL PUMP	Kefico 35320-04200
PETROL ECU MANUFACTURER / CODE	<b>Kefico 39108-040000/ CPEGD 2.20.4</b>
HIGH PRESSURE PETROL PUMP	<b>Kefico 35320-04250</b>
HIGH PRESSURE PETROL INJECTOR	Kefico
MODEL YEAR:	2017-
SYSTEM APPROVAL NUMBER ( R115 )	E4-115R-000017 / DLM-LPG 10
LOCATION R115 SYSTEM STICKER	right side, center door post
ENGINE SET NUMBER	349/075410001/A
MANUAL NUMBER	076/2891500
DATE	21-11-2018

Version 30-6-2016 D



## TABLE OF CONTENTS

General instructions .....	2
Required equipment / tools / materials for installing a complete system .....	3
Vehicle check .....	3
Tightening moments.....	4
Direct LiquiMax parts / approval numbers.....	4
Overview DLM Direct Injection.....	6
Fuel Management Unit connections.....	7
Fuel Management Unit.....	8
Boost pump .....	9
DLM component location overview .....	10
Removal of the High Pressure Petrol Pump .....	11
Installation of the High Pressure Petrol Pump .....	12
High pressure petrol pump installation.....	13
Mounting the FMU / boost pump.....	14
LPG / petrol fuel lines .....	15
Mounting the FMU / boost pump.....	16
Mounting the FMU / boost pump.....	17
Mounting the fuel lines .....	18
Mounting the fuel lines .....	19
Mounting the fuel lines .....	20
Fuel lines to tank .....	21
Supply hose – Return hose – Tank wiring .....	22
Mounting the AFC .....	23
Fuse box.....	24
Wiring routing .....	25
Mounting the fuel selection switch .....	26
Wiring Wake up, wire 56 .....	27
Basic DLM Gen3 wiring diagram.....	28
Main Connector .....	29
Electrical connections.....	30
Electrical connections.....	31
Electrical connections.....	32
Electrical connections.....	33
Electrical connections.....	34
Electrical connections.....	35
Prins safety stickers .....	36
Checklist after installation .....	37

FOR EXPLANATION AND CIRCUIT DIAGRAMS SEE : INSTALLATION MANUAL GENERAL PART 1 / 2

## General instructions

- The installation of the system shall be done in accordance with the installation manual provided by Prins Autogassystemen.
- This manual is based on Dutch regulations, always install the system in accordance to the local regulations.
- For an optimal functioning of the Direct LiquiMax Gen3 system, maintain a clean and organized work environment during installation and maintenance to prevent pollution of the LPG components.
- Always download the “general manual 1/2 “ from our [website](#) for basic instructions and diagrams.
- When working on the car, beware of moving and rotating parts in the engine compartment ( even when the engine is not running !! ).
- Always **disconnect the battery when installing / servicing** the LPG system. Make sure the ignition key is outside the car. Be aware of central door locking, radio / telephone memory code, alarm system.
- Wear safety goggles when working on the petrol filled system / connections ( pressurized petrol )
- Do not place the main fuse into the fuse holder before having completed the installation of the system.
- The AFC has to be activated by means of the Prins diagnosis software.
- Never disconnect the AFC connector, unless you have removed the main fuse.
- When installing the wiring harness, ensure that it does not run near any of the ignition components.

Solder and insulate all electrical connections.

The wires in the loom are provided with numbers and text. The text on the wire explains the function of the wire.

The wire harness is not model specific, therefore it may be necessary to adjust the length of the wires.

Ensure maximum care is taken when connecting wiring.

Make professional joints using solder and shrink sleeve. Do not stretch the wiring harness.

- No component of the LPG-system shall be located within 100 mm of the exhaust or similar heat source, unless such components are adequately shielded against heat.
- If holes have to be drilled (wear safety glasses) for installing brackets, etc., the drilled holes must always be treated with an anti-corrosion agent, after the debris has been removed (especially when mounting an exterior filler into body work).
- After having completed the installation, check the whole system for LPG leakage; use a gas leak detection device. Also check for leak of engine coolant, petrol and air.
- Fitting and maintenance is only allowed by Prins Autogassystemen selected LPG engineers.
- Failure to follow the instructions in this manual can result in a poor or non-working LPG installation or a dangerous situation.
- For maintenance instructions see owner's manual.
- Prins Autogassystemen is not responsible for any damages to people or objects as a result of changes to Prins products.
- [Check our website regularly for diagrams, certificates, updates, info-bulletins and product information.](#)


Register the system (with warranty card) on the [Prins warranty portal](#) within 14 days after installation.

## Required equipment / tools / materials for installing a complete system

- Complete workshop toolbox (wrenches, screwdrivers, cutters, pliers, ratchet, sockets)
- Car lift
- Portable computer
- Vehicle fuel system scan tool or OBD scan tool Prins (part no. 099/99928)
- Exhaust gas analyzer
- Multimeter
- Oscilloscope
- Prins diagnostic software
- Prins Diagnostic Tool
- Torque wrench (5-50Nm)
- Torque wrench (200-250Nm)
- Portable light
- Assortment drill bits Ø4 to 12 mm
- Assortment cutters (Ø20, 30, 50, 70 mm)
- Portable drill or pneumatic drill
- Thread cutting device (male M6x1, M8x1, M10x1)
- Air gun
- Vacuum cleaner
- Safety goggles
- Hot air gun
- Soldering iron, soldering tin
- Wire-stripping pliers
- Adhesive tape
- Adhesive sealant
- Thread locking compound
- Anti-corrosion agent / black body coating
- Gas leak detection device or foam leak spray
- Shrink sleeves

## Vehicle check

- Check the vehicle drivability on petrol
- Check the fuel system for error codes (scan tool)
- Check if the catalytic converter is in good condition (exhaust gas analyzer)
- Check the condition of the ignition system (spark plugs, cables, coil)

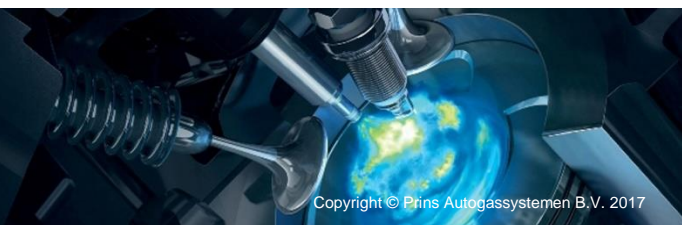


## Tightening moments

	Nm	Spanner mm
M 5 x 0,8	6.5	8
M 6 x 1,0	11.3	10
M 8 x 1,25	27.3	13
M 10 x 1,5	54	15-16-17
Banjo bolt	10	14
Supply line connection tank	15	13
Fuel module Allen bolts tank	20	7
Filler hose connection tank	50	22
Boost pump M6 mounting bolts	10	10
FMU M6 mounting bolts	10	10
High pressure petrol fuel line	24-35	17
Quick release	20	19

### EXPLANATION OF SYMBOLS:



= IMPORTANT, CAUTION

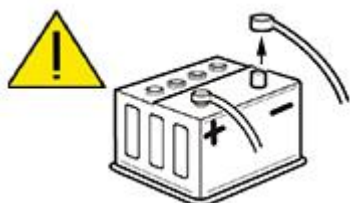


= WEAR SAFETY GOGGLES



Direct LiquiMax parts / approval numbers

	
Fuel Management Unit : E4-67R-010269	Boost pump
	
Prins AFC: E4-67R-010098 E4-10R-030507	High Pressure Pump : E4-67R-010266 High Pressure Rail : E4-67R-010267 High Pressure Injectors : E4-67R-010309
	
	Fuel lines XD-series : E4-67R-010247

Overview DLM Direct Injection

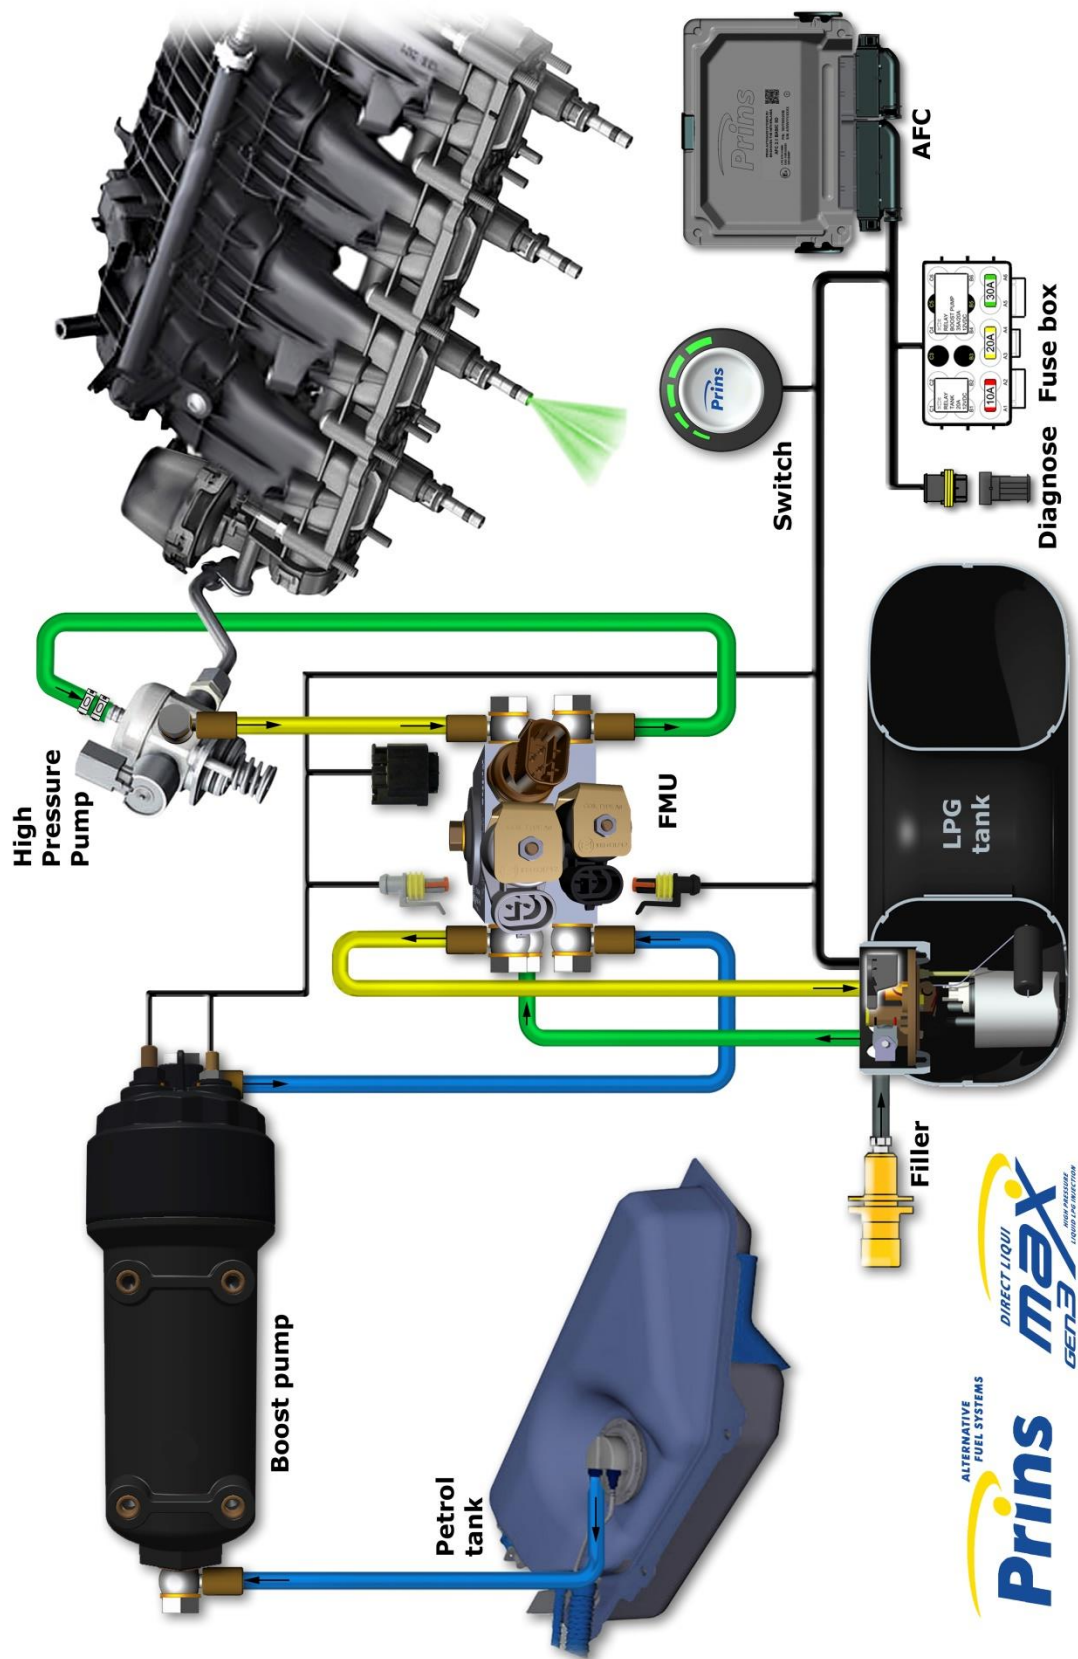

Fuel Management Unit connections











Fuel Management Unit



Boost pump



DLM component location overview

<p><b>Boost pump</b></p> 		<p><b>Petrol ecu</b></p>
<p><b>FMU</b></p> 		<p><b>AFC</b></p> 
<p><b>HPP pump</b></p> 		<p><b>Fuse / relay box</b></p> 

	<p>If applicable, R115 approval sticker : Right side centre door post</p>
---	---



## Removal of the High Pressure Petrol Pump

### **REMOVAL-**

#### **WARNING-**


In case of removing the high pressure fuel pump, high pressure fuel pipe, delivery pipe, there may be injury caused by leakage of the high pressure fuel.

Don't do any repair work right after engine stops (HOT engine).

- Turn the ignition switch OFF and disconnect the battery negative (-) cable.
- Wear safety goggles.
- Disconnect the fuel pressure regulator valve connector
- Disconnect the High Pressure fuel feed pipe (B)
- Remove the Low Pressure fuel pipe / hose (A).
- Remove the installation bolts (E), and then remove the high pressure fuel pump from the cylinder head assembly.

#### **CAUTION:**

Unscrew in turn the two bolts in small steps (0.5 turns). In case of fully unscrewing one of the two bolts with the other bolt installed, the housing surface of the cylinder head may break because of tension of the pump spring.

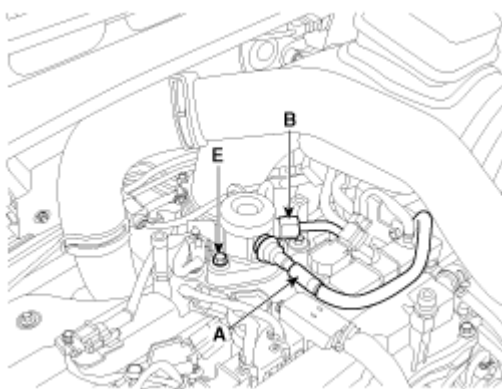

**CAREFULLY** store the removed petrol pump. Make sure no pollution can come into the pump.




## Installation of the High Pressure Petrol Pump

### INSTALLATION-

Before installing the high pressure fuel pump, position the roller tappet ( **B&C** ) in the lowest position by rotating the crankshaft. Otherwise the installation bolts may be broken because of tension of the pump spring.

Apply engine oil to the O-ring ( **A** ) of the high pressure fuel pump, the roller tappet ( **B** ), and the protrusion ( **C** ). ( roller tappet, only if removed from cylinder head )  
Also apply engine oil to the groove on the location where the protrusion ( **C** ) is installed.

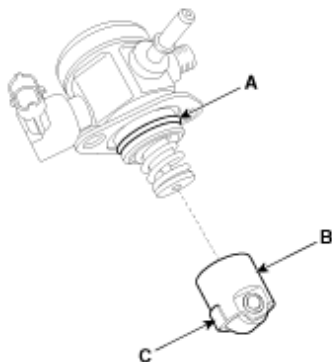

### Installation bolts:

When tightening the installation bolts of the high pressure fuel pump, tighten and turn the bolts in small step (0.5 turns) after tightening them with hand-screwed torque.

**High pressure petrol pump installation bolt:** 12.8 ~ 14.7 Nm.

### Petrol pipe:

First hand-tighten the nut(s) fully until they are not fastened any more in order to have them inserted in place and then completely tighten to the specified torque using a torque wrench.

If not tightening the bolts or nuts in a straight line with the mating bolt holes or fittings, it may cause a fuel leak due to broken threads.

**High pressure petrol pump installation nut:** 26.5 ~ 32.4 Nm.

Installation is reverse of removal.

## High pressure petrol pump installation



Replace the original high pressure petrol pump for the adapted high pressure petrol pump.  
(Follow the workshop manual of the car).




Tighten 20Nm







## Mounting the FMU / boost pump

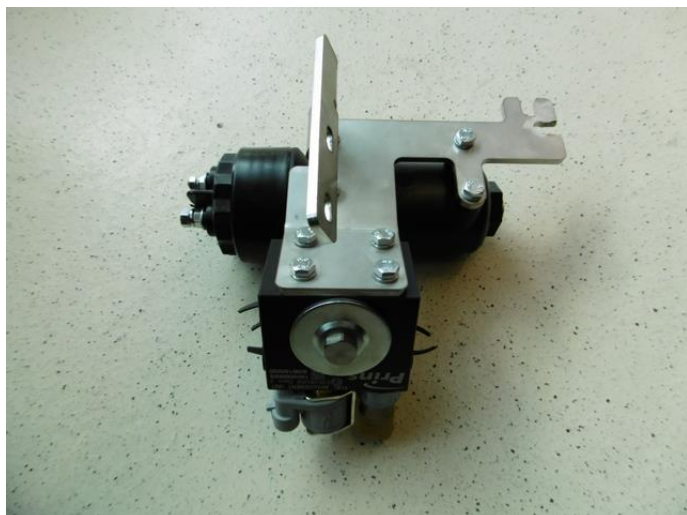


LPG / petrol fuel lines

	Hose	from	to	Length ( cm )
1	XD 4	Adapter original petrol hose	Boost pump in	70
2	XD 3	Boost pump out	FMU petrol supply	20
3	XD 3	FMU HPP supply	High pressure pump	110
4	XD 3	High pressure pump	FMU HPP return	110
5	XD fuel supply line	FMU LPG supply	Tank	450
6	XD fuel return line	FMU LPG return	Tank	450

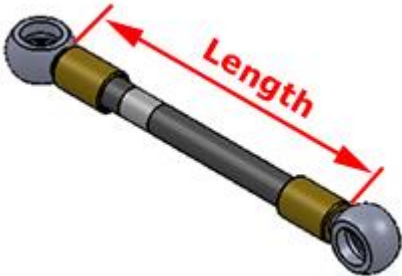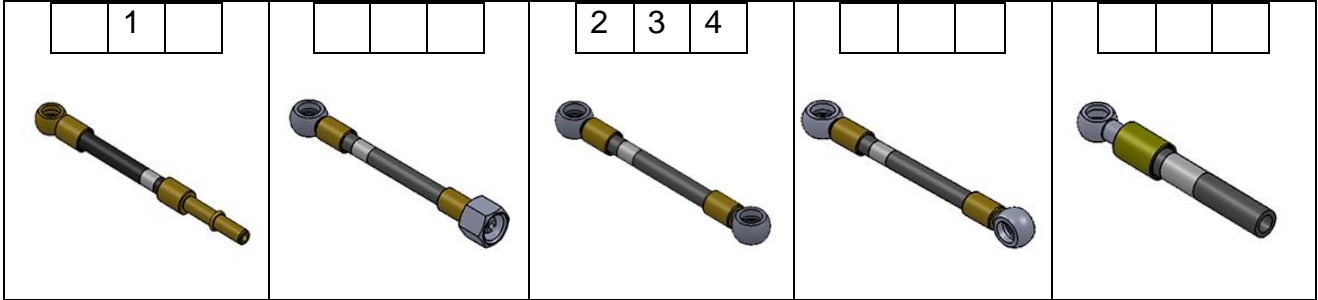


Install the fuel line using two bonded seal washers and banjo bolt :

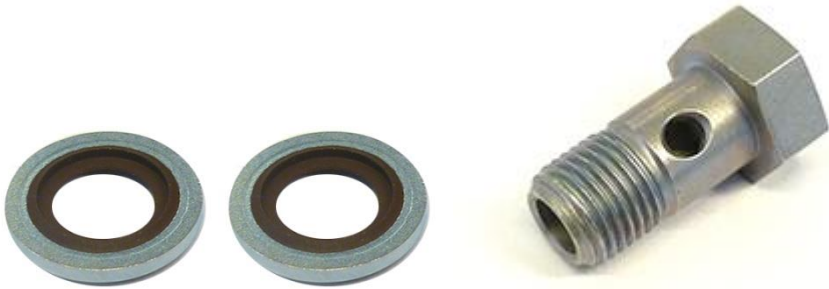





## Mounting the FMU / boost pump

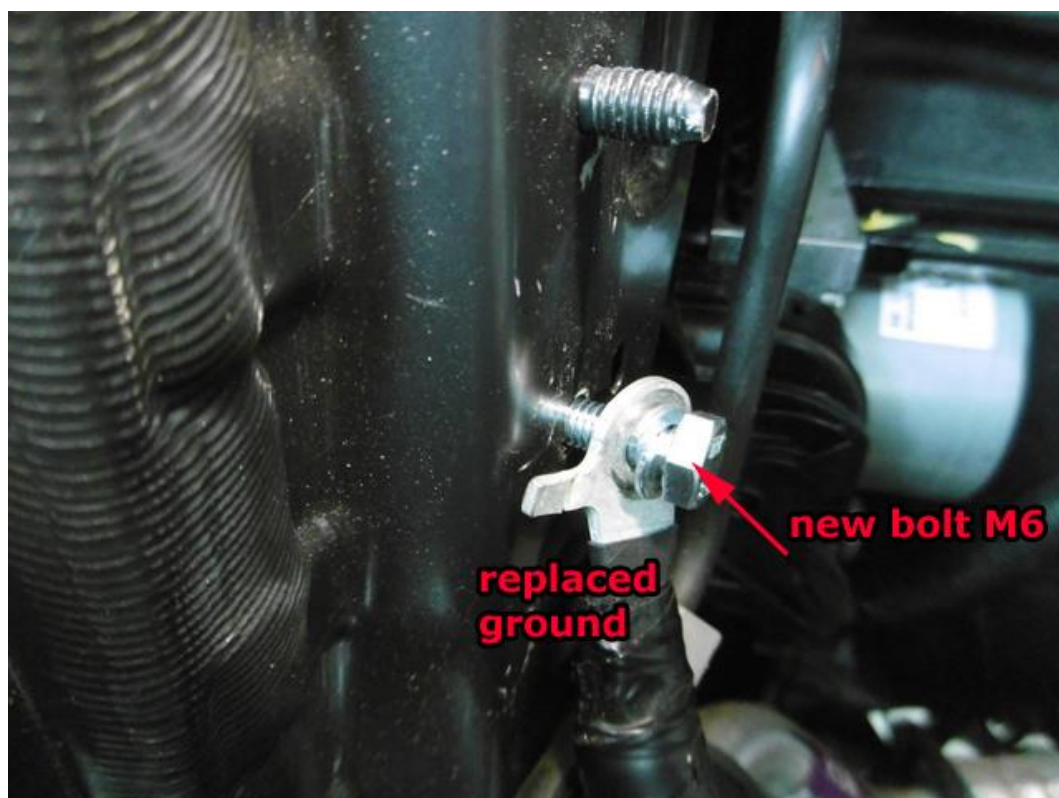



Remove and replace the horn ( later )

## Mounting the FMU / boost pump

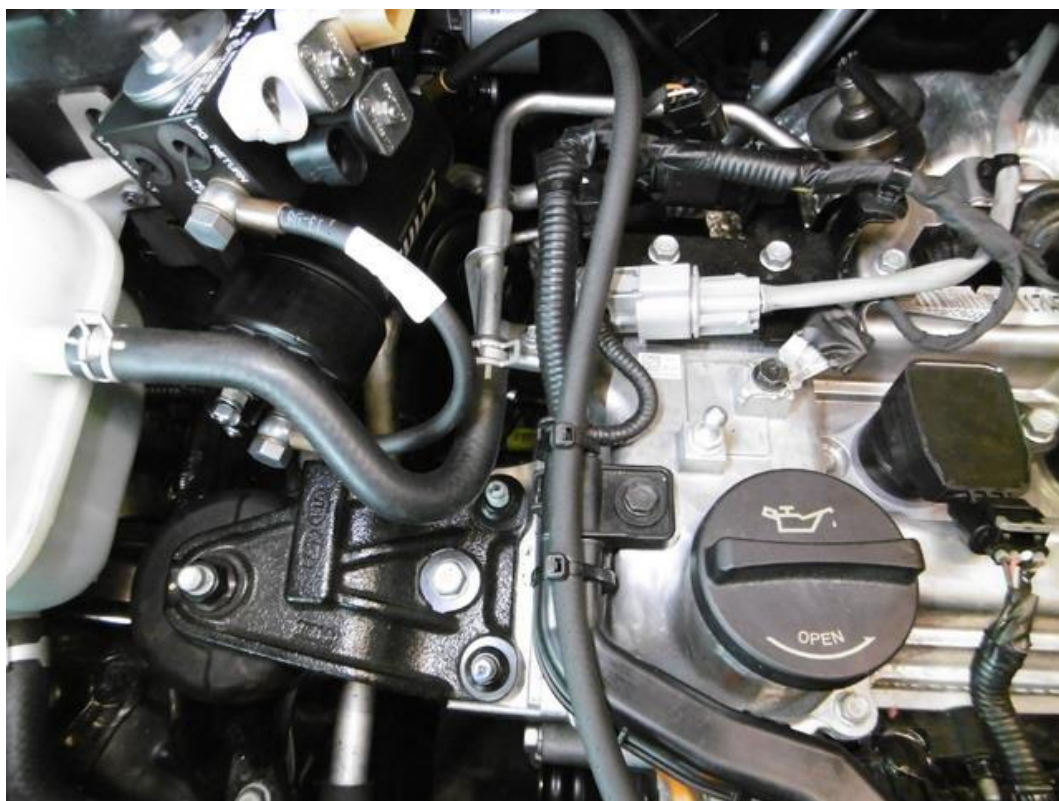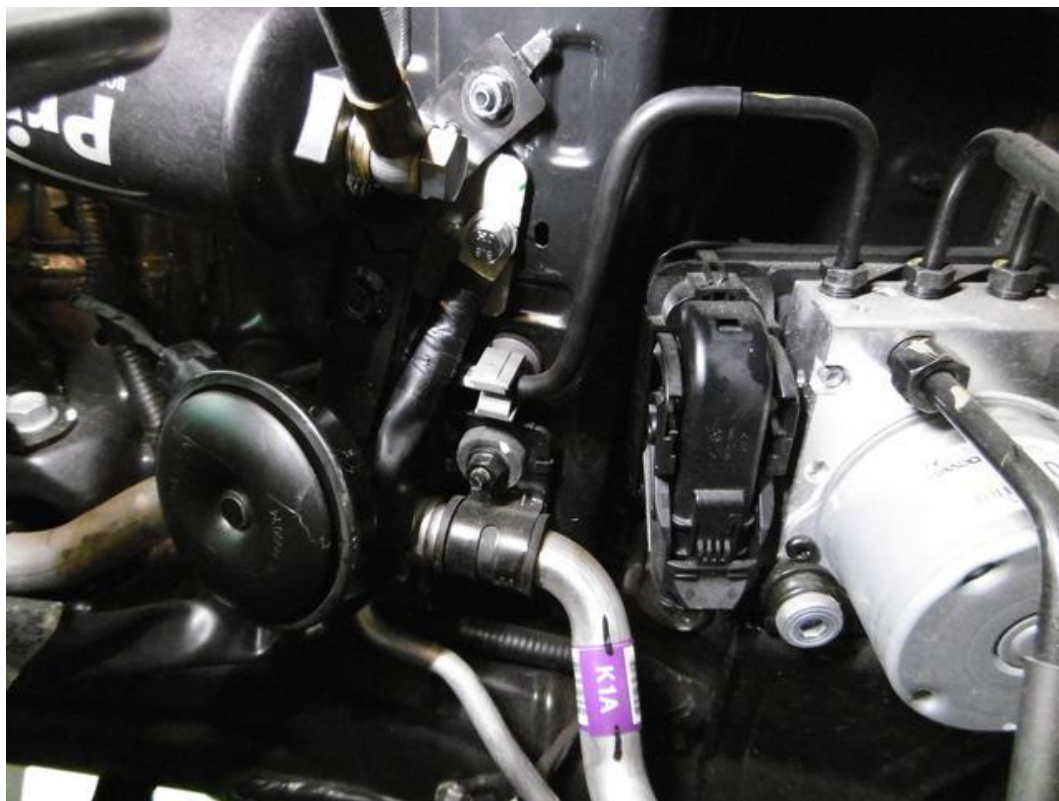




## Mounting the fuel lines

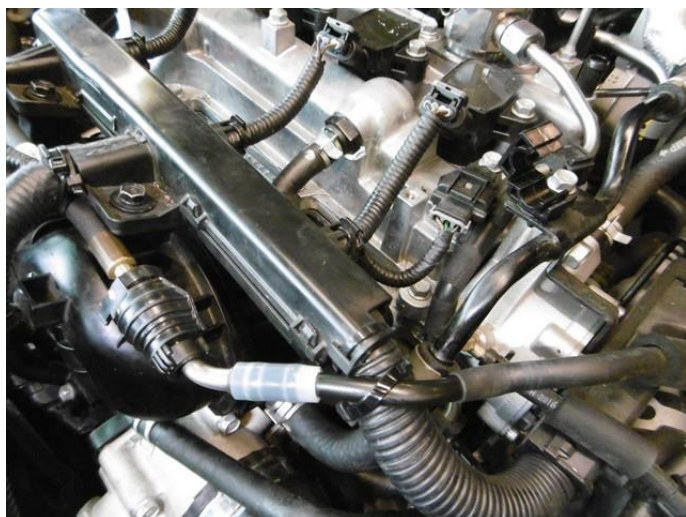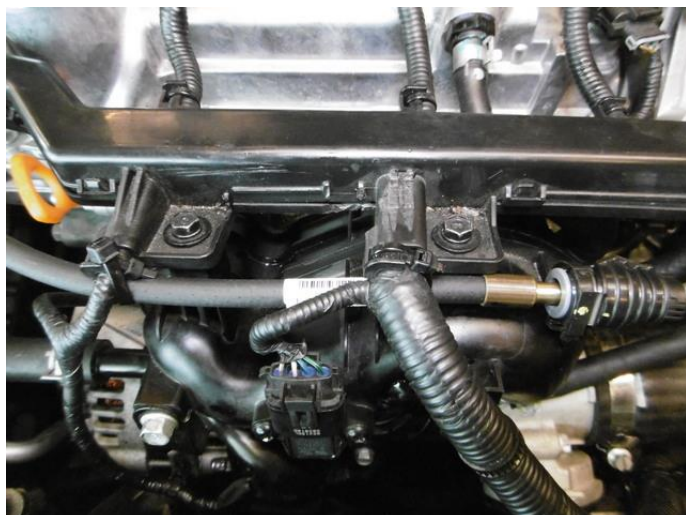



## Mounting the fuel lines


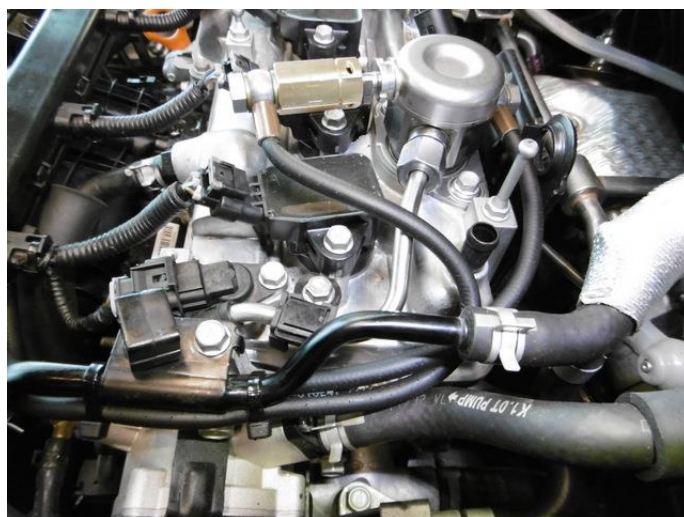




## Mounting the fuel lines




## Fuel lines to tank

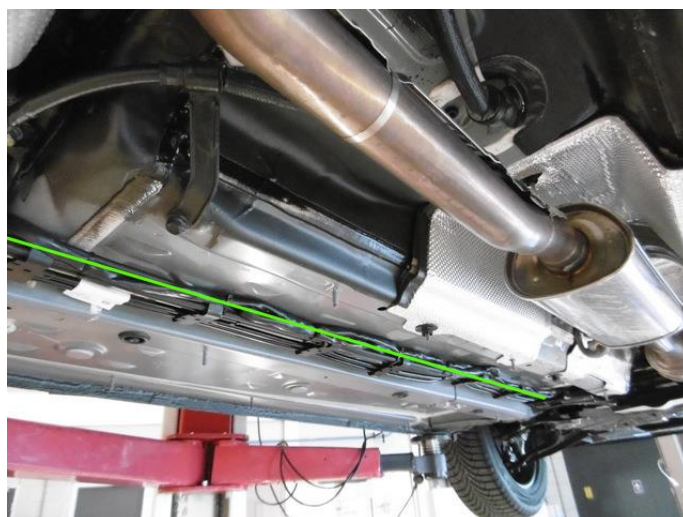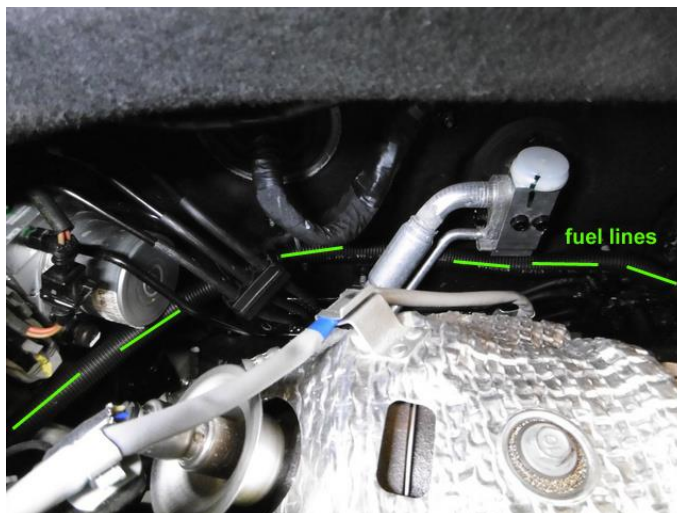



### Supply hose – Return hose – Tank wiring


Protect the supply- and return hose together with tank-wiring using the Ø16mm split tube. Mount the “hose assembly” with clamps, with a maximum distance of 40cm.

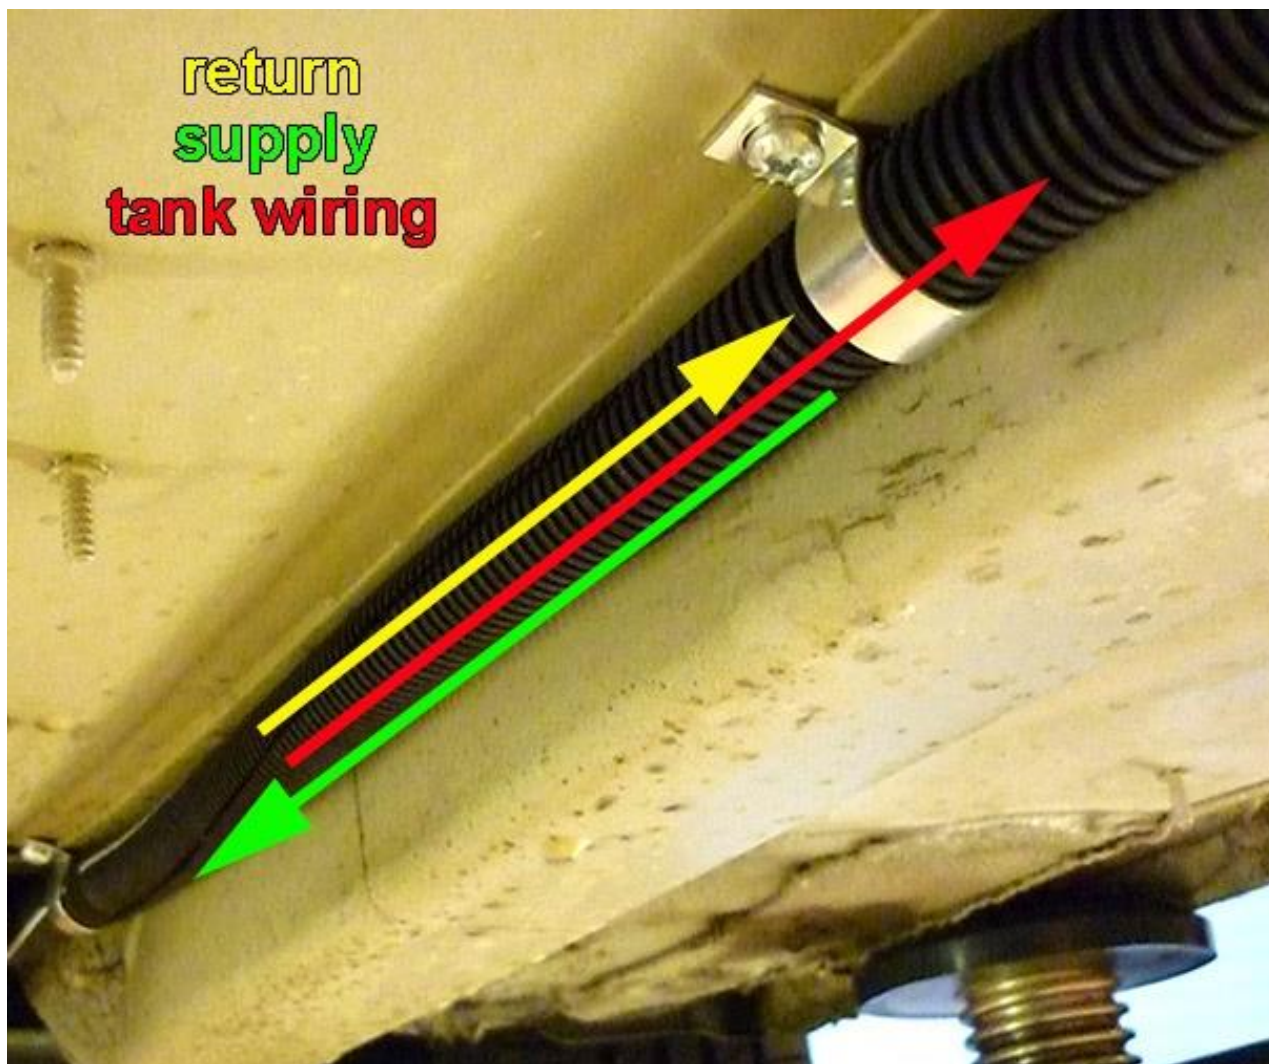


Demo photo



## Mounting the AFC

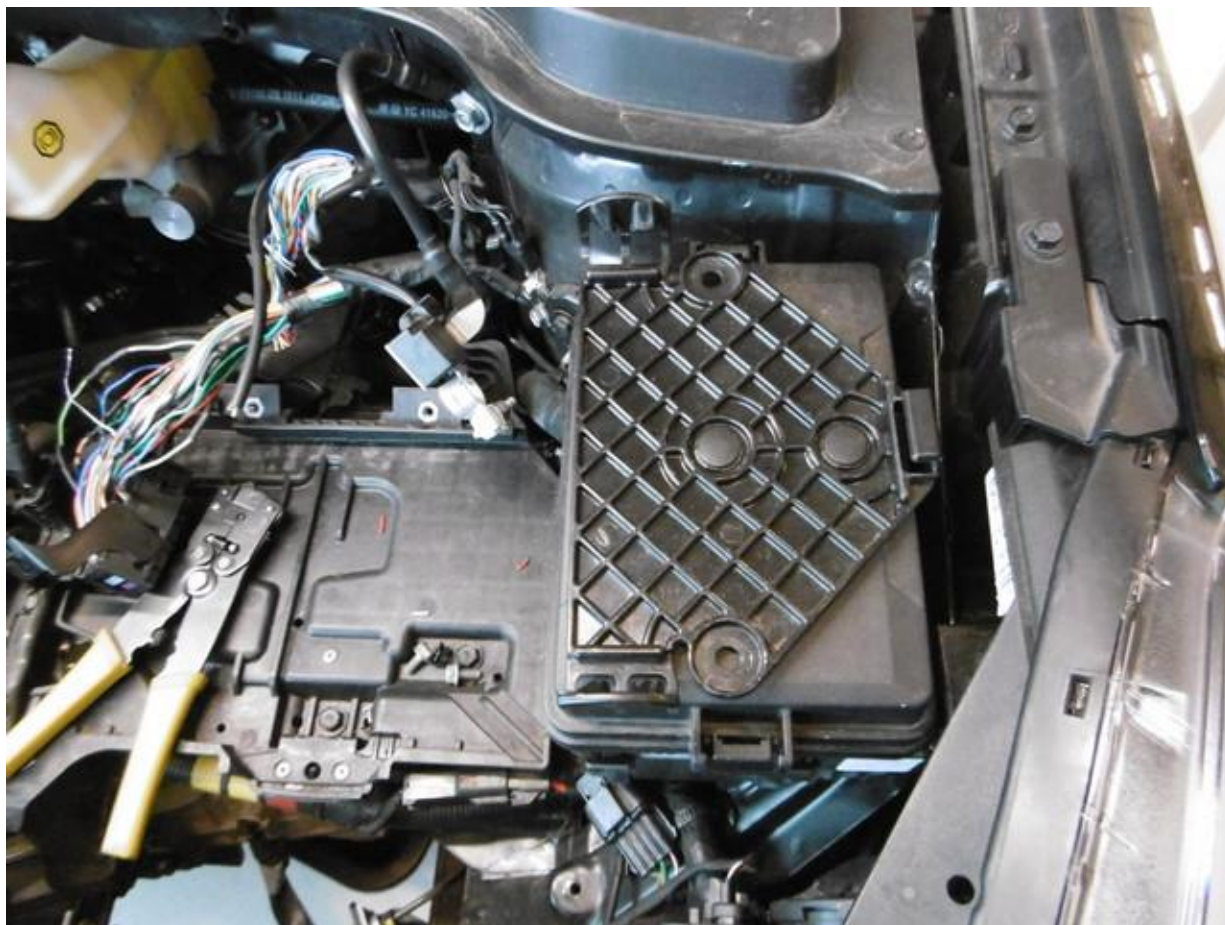

## Fuse box

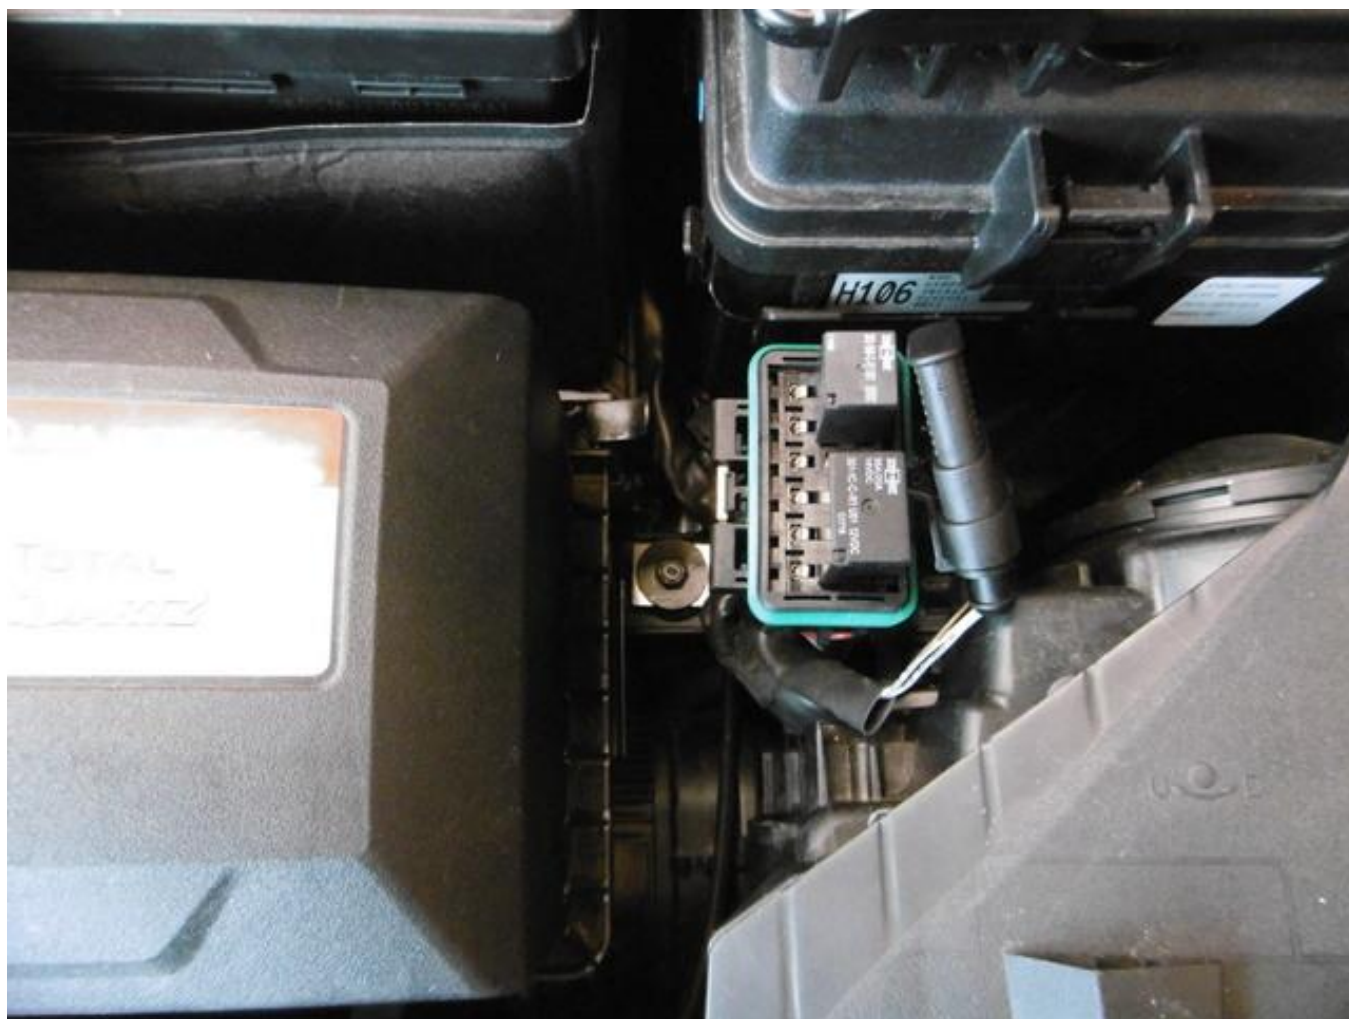



## Wiring routing




Wiring inside: SWITCH/CAN,& 56, see next page





## Mounting the fuel selection switch

**ALSO INSIDE / Body Control Module : wire 56 DIG IN2**



56	DIG IN2		Yellow-green	Double brown, top connector, see next page
----	---------	---	--------------	--



Drill Ø8.3mm, mount the switch.




Wiring Wake up, wire 56

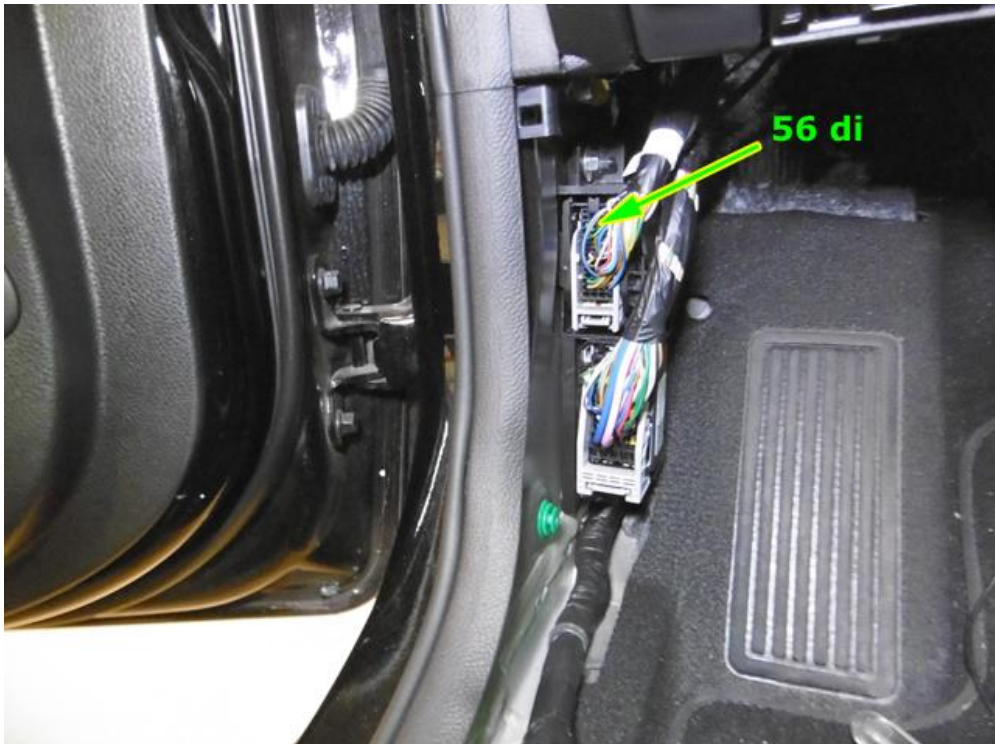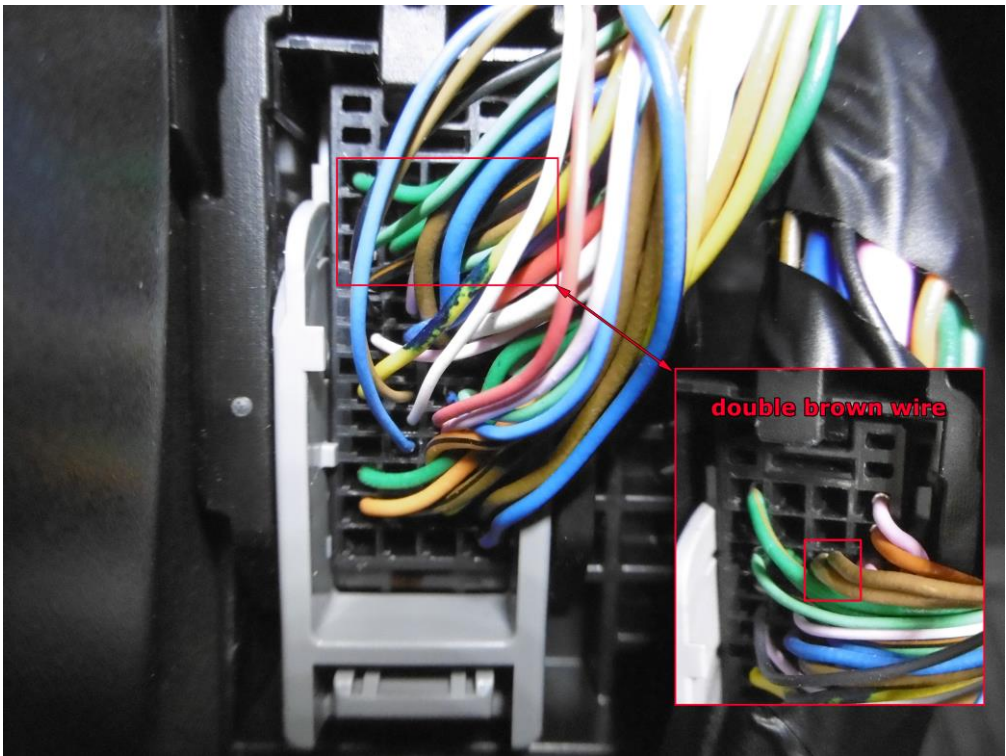

56	DIG IN2		Yellow-green	Thin Blue wire, D-Floor Connector, pin 4
----	---------	---	--------------	--




## Basic DLM Gen3 wiring diagram

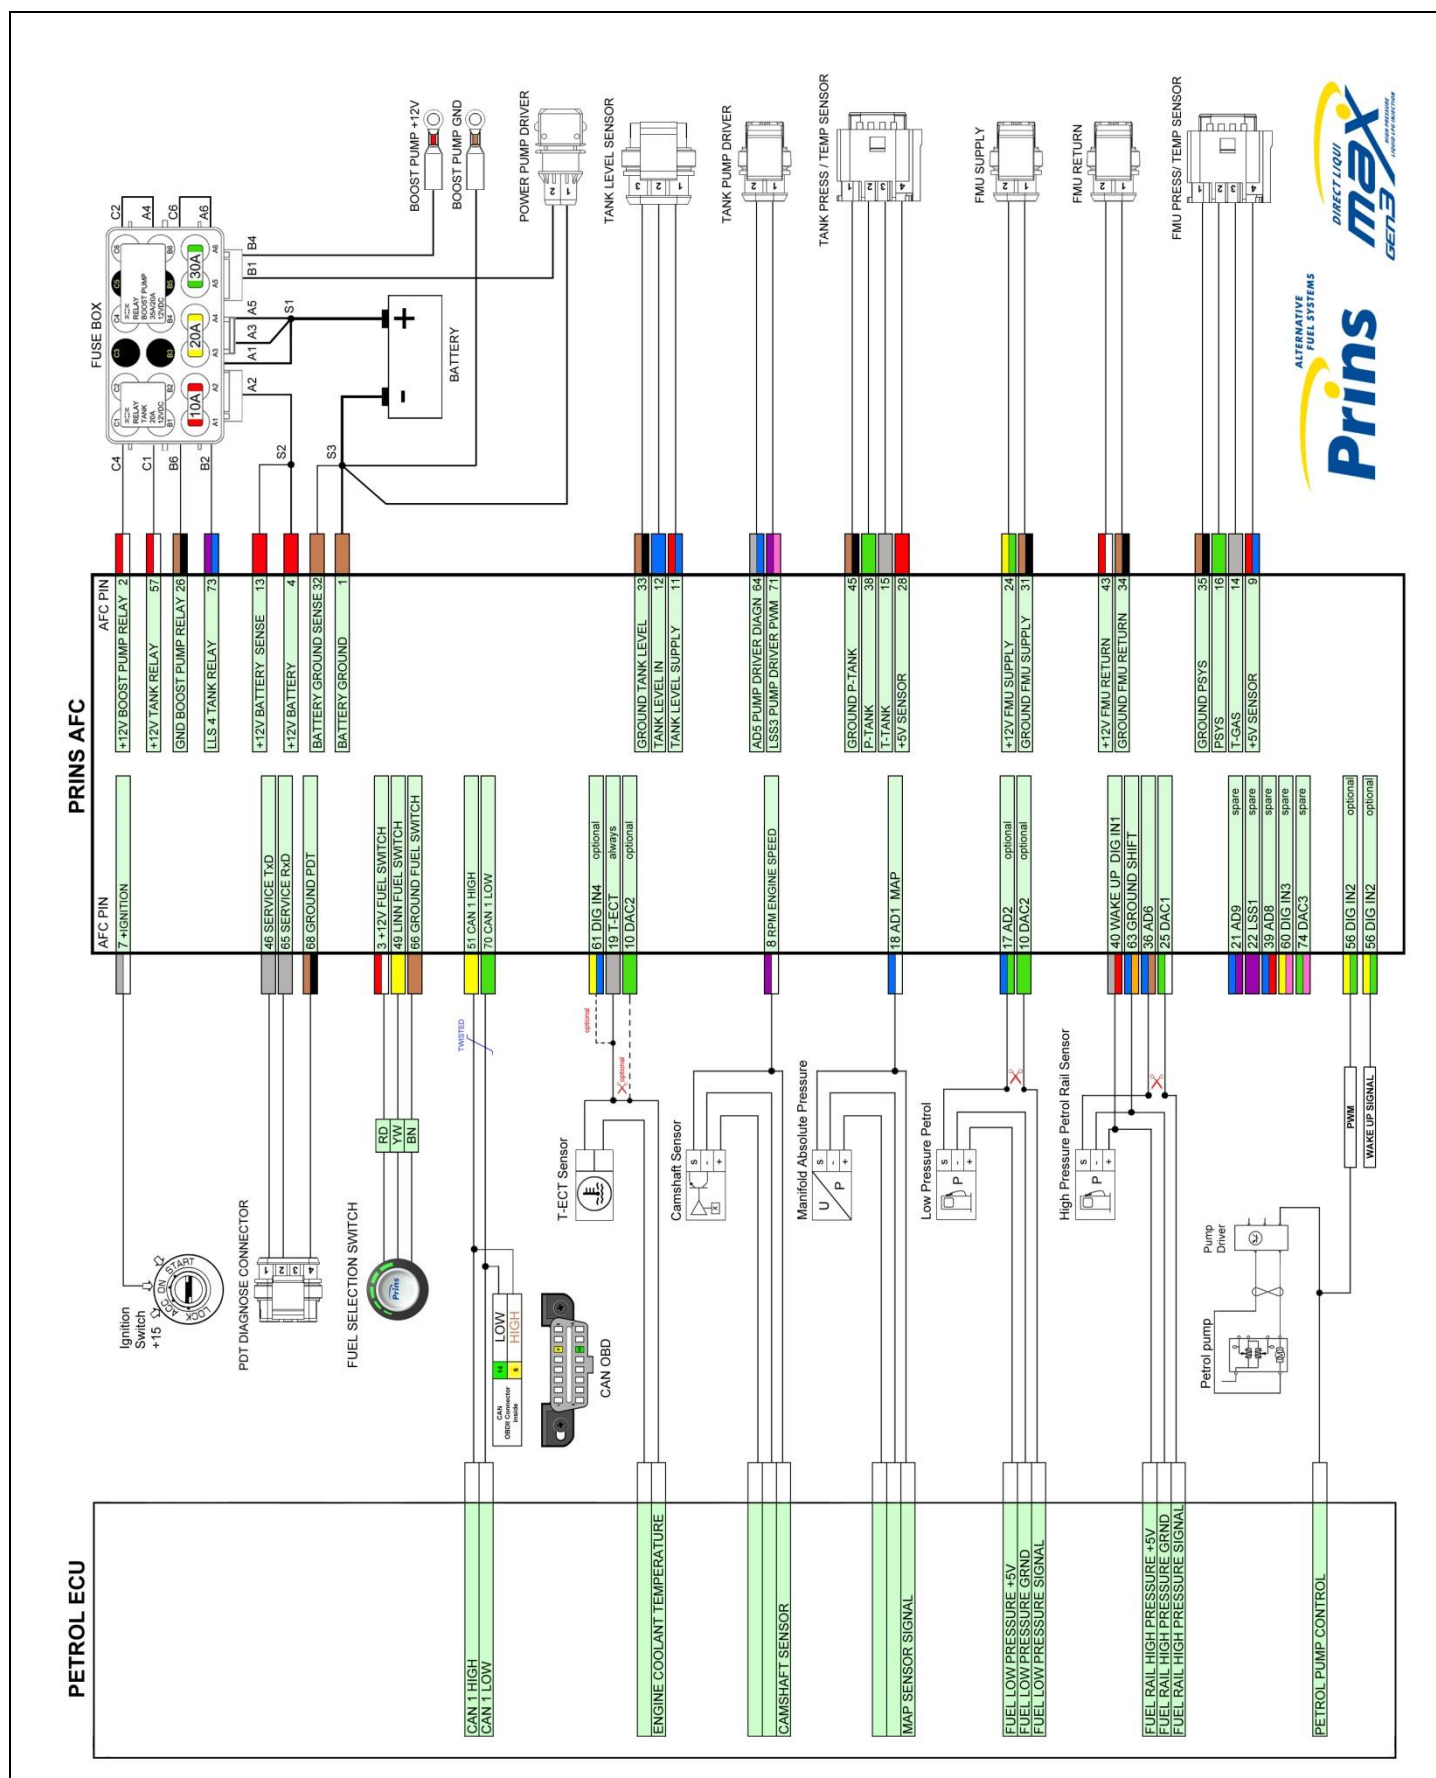





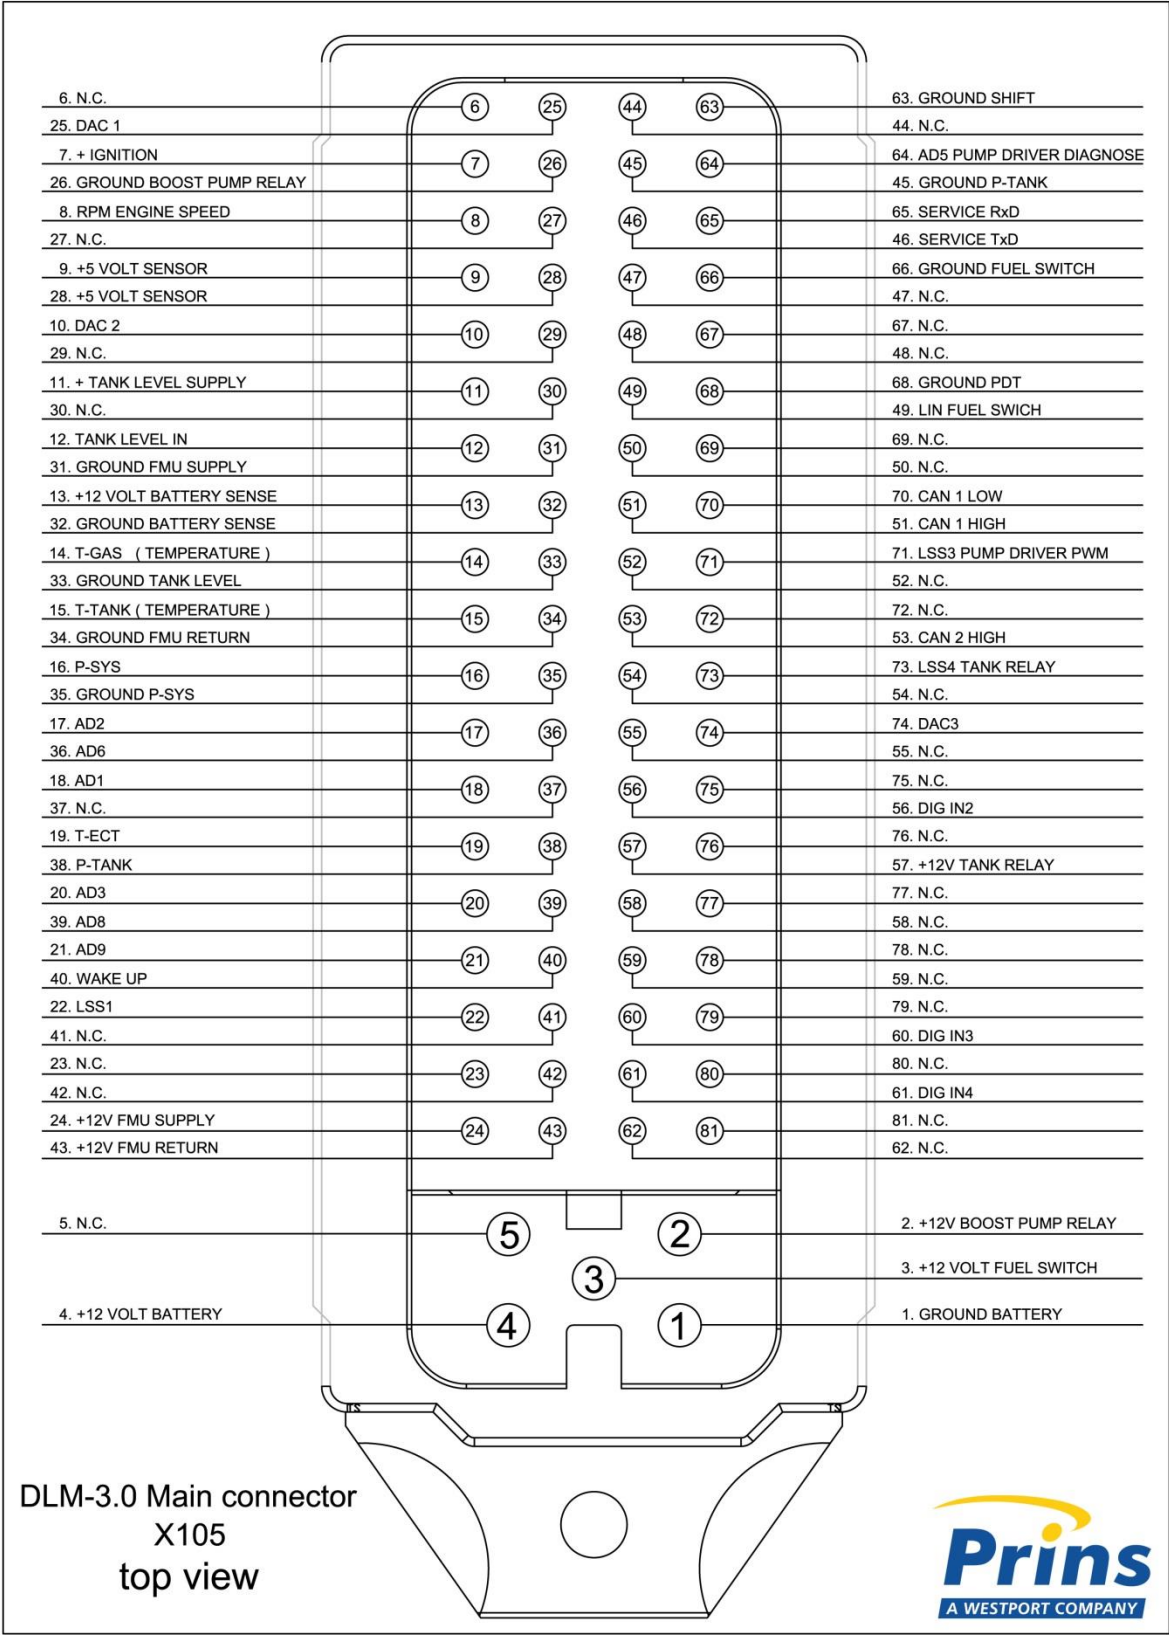




Main Connector



## Electrical connections


Insulate not used wires.




<i>Wire text</i>	<i>clr</i>	<i>Wire colour</i>	<i>Connection</i>
17 AD 2		Blue-green	
10 DAC 2		Green	
21 AD 9		Blue-purple	
22 LSS 1		Purple	
39 AD 8		Blue-red	
60 DIG IN3		Yellow-pink	
61 DIG IN4		Yellow-blue	


Electrical connections



Check and measure the wiring in case of changes in the cars wiring colours.  
Insulate not used wires.

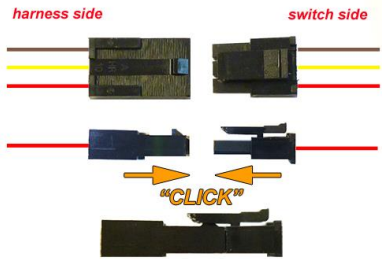Driver room

Wire number / code	Wire colour	Connection
3-pole micro connector 66 Ground fuel switch 3 +12V fuel switch 49 LIN fuel switch	Brown-black Red-white Yellow	Connect the 3-pole connector to the Prins fuel selection switch.
		

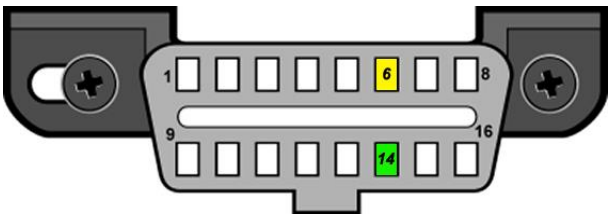51 CAN-High		Yellow	EOBD connector pin 6
70 CAN-Low		Green	EOBD connector pin 14
			


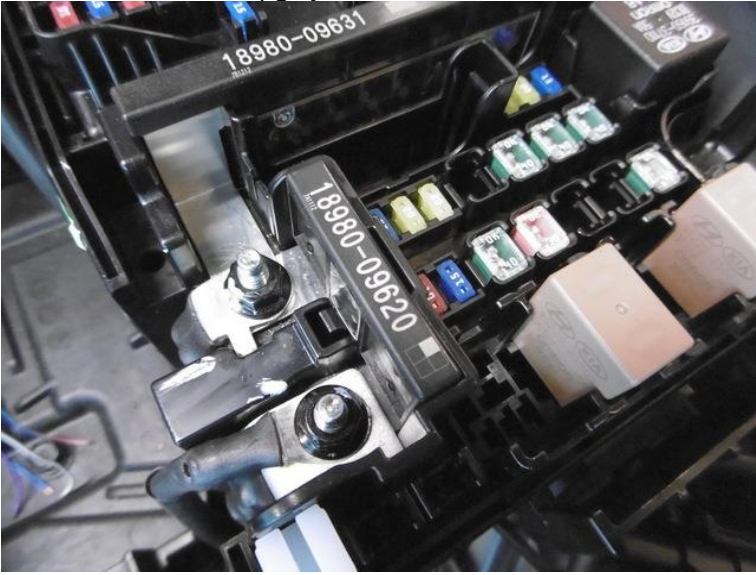
56 DIG IN2		Yellow-green	Double brown, door switch
------------	---	--------------	---------------------------

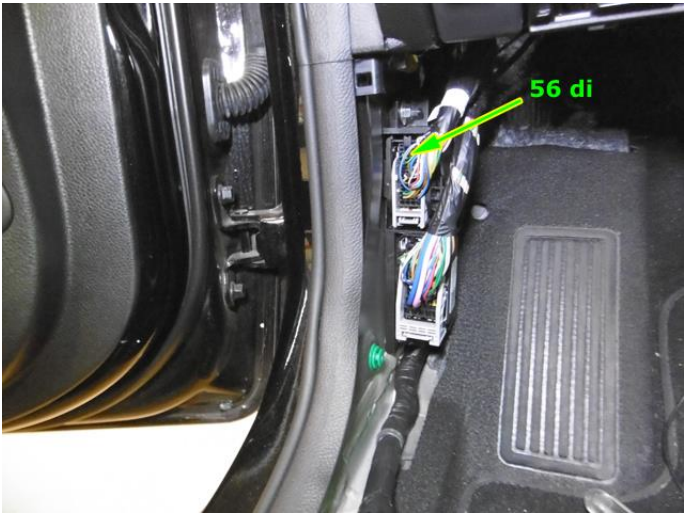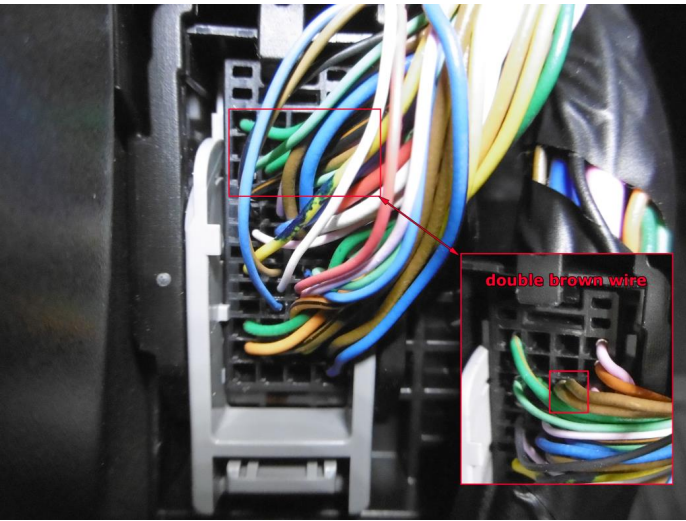



## Electrical connections

Check and measure the wiring in case of changes in the cars wiring colours.  
Insulate not used wires.

Wire text	clr	Wire colour	Connection
1			<p>Connect to the '-' of the battery ( -31 ); use a ring terminal.</p> 
1 BATTERY GROUND		Brown	
4			<p>Connect to the '+' of the battery ( +30 ); use a ring terminal. <b>Do not place the fuses</b> before having completed the installation of the lpg system.</p> 
4 +12V BATTERY		Red	

## Electrical connections

Check and measure the wiring in case of changes in the cars wiring colours.  
Insulate not used wires.


Wire text	clr	Wire colour	Connection
			For measuring the engine coolant temperature. Wire colour : white Wire location : petrol ecu, <b>60</b> -pole connector, pin 7
19 T-ect		Grey	
			Boost pressure sensor signal interruption. Wire colour : brown Wire location : petrol ecu, <b>60</b> -pole connector, pin 9
20 AD 3		Blue-pink	Sensor side
74 DAC 3		Green-pink	Petrol ecu side
			For measuring the engine speed signal. Wire colour : green Wire location : petrol ecu, <b>60</b> -pole connector, pin 56
8 RPM		Purple-white	
			Connect to +ignition / contact+ ( +15 ). Wire colour : green-orange / pink Wire location : petrol ecu, 94-pole connector, pin 29
7 +IGNITION		Grey-white	
			Analog in ( sensor side ) MAP sensor in. Wire colour :yellow Wire location : petrol ecu, 94-pole connector, pin 57
18 AD 1		Blue-white	
			High pressure petrol sensor ground. Wire colour : black Wire location : petrol ecu, 94-pole connector, pin 36
63 Ground Shift		Blue-orange	
			High pressure petrol sensor signal interruption. Wire colour : green-black Wire location : petrol ecu, 94-pole connector, pin 78
36 & 25			
36 AD 6		Blue-brown	Sensor side
25 DAC 1		Green-white	Petrol ecu side
			High pressure petrol sensor 5Volt supply Wire colour : red-orange Wire location : petrol ecu, 94-pole connector, pin 87
40 Wake-up		Grey-red	

## Electrical connections

Check and measure the wiring in case of changes in the cars wiring colours.  
Insulate not used wires.

### Engine room

Wire number / code	Wire colour	Connection
<b>4-pole FMU P/T sensor</b> 1. 35 Ground P-Sys 2. 16 P-Sys 3. 14 T-Sys 4. 9 +5V sensor	Brown-black Green Grey Red-blue	Connect the 4-pole connector to the P/T sensor.
<b>2-pole black connector FMU</b> 24 +12V FMU supply 31 Ground FMU supply	Yellow-green Brown-black	Connect the 2-pole connector to the black lock-off valve of the Fuel Management Unit
<b>2-pole grey connector FMU</b> 43 +12V FMU return 34 Ground FMU return	Red-white Brown-black	Connect the 2-pole connector to the grey lock-off valve of the Fuel Management Unit
<b>4-pole diagnose connector</b> 46 Service TxD 65 Service RxD 68 Ground PDT	Grey Grey Brown-black	<i>Diagnose connector for service / diagnosis.</i> Connector pin 1 Connector pin 2 Connector pin 4
<b>Boost pump relay</b> 2 +12V boost pump relay 26 Ground BP relay +12V fused BATT +12V Boost pump	Red-white Brown-black Red Red	Pin 86 of the boost pump relay C4 Pin 85 of the boost pump relay B6 Pin 30 of the boost pump relay C6-A5 Pin 87 of the boost pump relay B4
<b>Wiring tank pump driver relay</b> 57 +12V tank relay 73 LSS 4 tank relay +12V BATT fused +12V driver	Red-white Purple-blue Red Red	Pin 86 of the driver relay C1 Pin 85 of the driver relay B2 Pin 30 of the driver relay C2-A4 Pin 87 of the driver relay B1

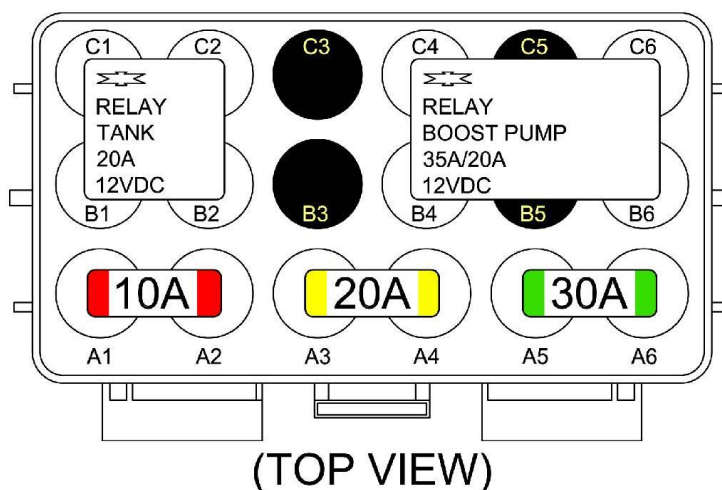




## Electrical connections

Check and measure the wiring in case of changes in the cars wiring colours.  
Insulate not used wires.

### Lpg tank housing

Wire number / code	Wire colour	Connection
<b>3-pole tank level connector</b> 1. 33 Ground tank level 2. 12 Tank level in 3. 11 + tank level supply	Brown-white Blue Red-blue	Connect the 3-pole connector to the tank level sensor.
<b>4-pole Tank P/T sensor</b> 1. 45 Ground P-Tank 2. 38 P-Tank 3. 15 T-Tank 4. 28 +5V sensor	Brown-black Green Grey Red	Connect the 4-pole connector to the P/T sensor.
<b>2-pole Steering Diagnose connector</b> 1. Ground pump driver 2. +12V pump driver	Brown Red	Connect the 2-pole connector to the driver, connector 3.
<b>2-pole Steering Diagnose connector</b> 1. 71 LSS3 Pump driver PWM 2. 64 Pump driver diagnose	Purple-pink Blue-grey	Connect the 2-pole connector to the driver, connector 4.

Pump Driver		
<b>1.</b> 2-pole connector tank lock-off	Green-yellow Brown	From tank pump driver From tank pump driver
<b>2.</b> 3-pole connector tank pump	Red Brown	From tank pump driver From tank pump driver
<b>3.</b> 2-pole connector driver	Brown Red	From main ground From tank pump relay Ground pump driver +12V pump driver
<b>4.</b> 2-pole connector driver	Green Grey	From AFC pin 71 From AFC pin 64 LSS3 Pump driver PWM Pump driver diagnose

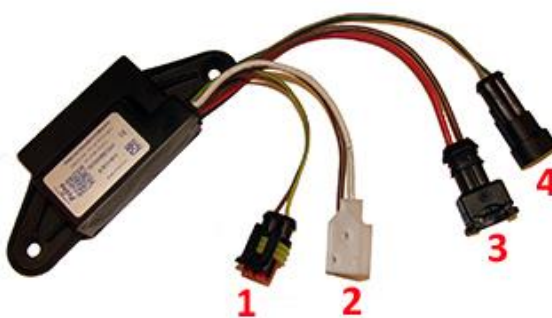

Prins safety stickers



Apply the sticker on an eye catching location.

## Checklist after installation

1. Install the system fuses.  
Turn on ignition.  
Connect the Prins Diagnostic Tool and run the Prins Diagnostic program.  
When working on the car, beware of moving and rotating parts in the engine compartment (even when the engine is not running !!).
2. When commissioning the LPG system, you must activate the AFC with the diagnosis software.
3. Check whether the program in the AFC matches with the car (dedicated engine set):  
See "Identification" in the diagnosis program.
4. Check all components and connections for any LPG leakage, use a gas leak detector device or a fluid detection like soap. Also check for petrol leakage.  
Check all made connections and XD-hose crimps for petrol / LPG leakage.  
Make sure the solenoid valves are in open position.  
No evidence of leakage is permitted.  
Caution for moving and rotating parts in the engine compartment !
5. Use the diagnosis software to check again all input and output signals.
6. Check the system for error codes and solve these if required.  
Check the petrol ECU for EOBD error codes.  
Place the protection connector back on the diagnose connector.
7. Make a test drive and check the cars drivability on LPG and petrol.

