



*Quality, innovation and customer care, it's in our nature*



## **Installation manual Dedicated PART 2/2**



MANUFACTURER	HYUNDAI
TYPE	I 40
ENGINE DISPLACEMENT	1591
NUMBER OF VALVES	16V
ENGINE CODE / NUMBER	G4FD
VEHICLE CATEGORIES	M
TRANSMISSION	MT
VERSION	Direct LiquiMax-2.1
PETROL ECU MANUFACTURER / CODE	Kefico MED 17.9.8 2BFB
HIGH PRESSURE PETROL PUMP	BOSCH-HDP-5-PE / 0261520.(081)/(082) TYPE5
HIGH PRESSURE PETROL INJECTOR	BOSCH-HDEV-5-1 / 0261500.(100)/(101)
MODEL YEAR:	3-2013
SYSTEM APPROVAL NUMBER ( R115 )	E4-115R-0000-04/17 / DLM-LPG 01/10
LOCATION SYSTEM STICKER	right side, centre door post
ENGINE SET NUMBER	349/070025/A
MANUAL NUMBER	076/0910000
DATE	02-01-2014

Copyright © Prins Autogassystemen B.V. 2013

Version 2013-09-28 D



**TABLE OF CONTENTS**

General instructions .....	2
Required equipment / tools / materials for installing a complete system .....	3
Vehicle check.....	3
Tightening moments.....	4
Direct LiquiMax-2.1 .....	5
Direct LiquiMax parts / approval numbers .....	6
DLM-2.1 component location overview.....	7
Removal of the Bosch High Pressure Petrol Pump.....	8
Installation of the Bosch High Pressure Petrol Pump .....	9
High pressure petrol pump installation.....	10
High pressure petrol pump LPG return .....	11
Preparation boost pump .....	12
Installation boost pump. ....	13
Connection of the fuel hose to the boost pump.....	14
Fuel Supply Unit / Fuel Return Unit .....	15
Mounting the Fuel Units .....	16
Lpg / petrol fuel lines.....	17
Supply hose – Return hose – Tank wiring.....	18
Hose routing 1 .....	19
Hose routing 2.....	20
Mounting the AFC / fuse and relays.....	21
Wiring routing.....	22
Mounting the fuel selection switch .....	23
Electrical connections.....	24
Electrical connections.....	25
Electrical connections.....	28
Electrical connections.....	29
Prins R-115 and R-67 sticker.....	30
R-115.....	30
R-67.....	30
Prins safety stickers .....	31
LPG TANK.....	31
Checklist after installation.....	32

**FOR EXPLANATION AND CIRCUIT DIAGRAMS SEE : INSTALLATION MANUAL GENERAL PART 1 / 2**



## General instructions

- The installation of the system shall be done in accordance with the installation manual provided by Prins Autogassystemen.
- This manual is based on Dutch regulations, always install the system in accordance to the local regulations.
- For an optimal functioning of the Direct LiquiMax-2.0 system, maintain a clean and organized work environment during installation and maintenance to prevent pollution of the LPG components.
- Always download the “general manual 1/2 “ from our website for basic instructions and diagrams.
- Always disconnect the battery when installing the LPG system. Make sure the ignition key is outside the car.  
Be aware of central door locking, radio / telephone memory code, alarm system.
- Wear safety goggles when working on petrol filled system / connections ( pressurized petrol )
- Do not place the main fuse into the fuse holder before having completed the installation of the system.
- The AFC has to be activated by means of the Prins diagnosis software.
- Never disconnect the AFC connector, unless you have removed the main fuse.
- When installing the wiring harness, ensure that it does not run near any of the ignition components.

Solder and insulate all electrical connections.

The wires in the loom are provided with numbers and text. The text on the wire explains the function of the wire.

The wire harness is not model specific, therefore it may be necessary to adjust the length of the wires.

Ensure maximum care is taken when connecting wiring.

Make professional joints using solder and shrink sleeve. Do not stretch the wiring harness.

- No component of the LPG-system shall be located within 100 mm of the exhaust or similar heat source, unless such components are adequately shielded against heat.
- If holes have to be drilled (wear safety glasses) for installing brackets, etc., the drilled holes must always be treated with an anti-corrosion agent, after the chips have been removed ( especially when mounting a exterior filler into body work).
- After having completed the installation, check the whole system for LPG leakage; use a LPG leak detection device. Also check for leak of engine coolant, petrol and air.
- Fitting and maintenance is only allowed by Prins Autogassystemen selected LPG engineers.
- Failure to follow the instructions in this manual can result in a poor or non-working LPG installation or a dangerous situation.
- For maintenance instructions and filter registration see owner manual.
- Prins Autogassystemen is not responsible for any damages to people or objects as a result of changes to Prins products.
- Check our website regularly for diagrams, certificates, updates, info-bulletins and product information.

Register ( warranty card ) the system on the Prins warranty portal .



## Required equipment / tools / materials for installing a complete system

- Complete workshop toolbox ( wrenches, screwdrivers, cutters, pliers, ratchet, sockets )
- Car lift
- Portable computer : operating on Windows 98, W2000 or XP.
  - Internal memory : 16 Mb or more
  - Memory HD space : 5MB
  - Screen : 256 colours, advise colours 16 bits or more
  - Com port : 1 free COM port 1 or COM port 2 with a 9 or 25 pins connector
- Vehicle fuel system scan tool or OBD scan tool Prins ( part nr. 099/99928 )
- Exhaust gas analyser
- Multimeter
- Oscilloscope
- Prins diagnostic software
- Prins serial interface
- Torque wrench ( 5-50Nm )
- Torque wrench ( 200-250Nm )
- Portable light
- Assortment drill bits 4 to 12 mm
- Assortment cutters ( ø 20, 30, 50, 70 mm )
- Portable drill or pneumatic drill
- Thread cutting device ( male M6x1, M8x1, M10x1 )
- Air gun
- Vacuum cleaner
- Safety goggles
- Hot air gun
- Soldering iron, soldering tin
- Wire-stripping pliers
- Adhesive tape
- Adhesive sealant
- Thread locking compound
- Anti-corrosion agent / black body coating
- Gas leak detection device or foam leak spray
- Shrink sleeves
- Engine coolant

## Vehicle check

- Check the vehicle drivability on petrol
- Check the fuel system for error codes ( scan tool )
- Check if the catalytic converter is in good condition ( exhaust gas analyzer )
- Check the condition of the ignition system ( spark plugs, cables, coil )



**Tightening moments**

	Nm	Spanner mm
M 4 x 0,7	3.3	7
M 5 x 0,8	6.5	8
M 6 x 1,0	11.3	10
M 7 x 1,0	14.5	11
M 8 x 1	24.5	13
M 8 x 1,25	27.3	13
M 10 x 1	52	15-16-17
M 10 x 1,5	54	15-16-17
( filtered ) Banjo bolt	10	14
Supply line connection	15	13
Fuel module Allen bolts	20	7
Filler hose connection	50	22

EXPLANATION OF SYMBOLS :

= IMPORTANT,  
CAUTION




= WEAR SAFETY GOGGLES





Direct LiquiMax-2.1

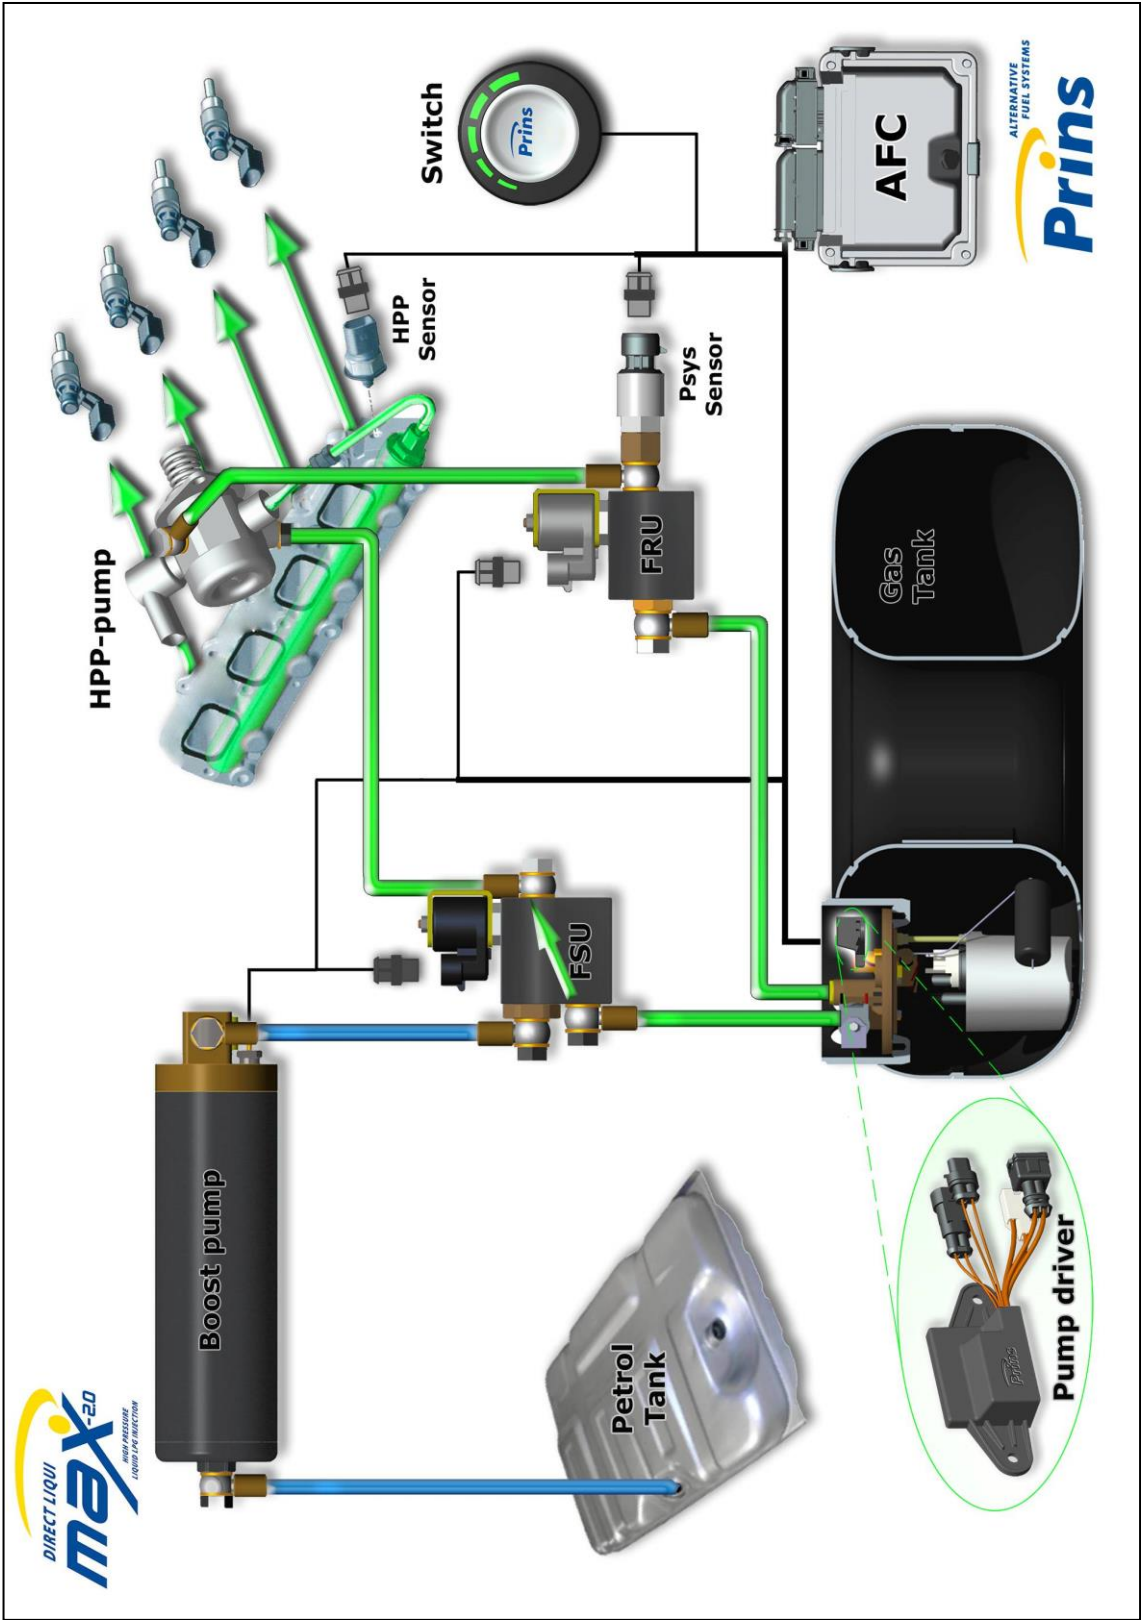











**Direct LiquiMax parts / approval numbers**


 <p>1<sup>st</sup> generation</p>  <p>2<sup>nd</sup> generation</p>	 <p>1<sup>st</sup> generation</p>  <p>2<sup>nd</sup> generation</p>
Fuel Supply Unit : E4-67R-010269	Fuel Return Unit : E4-67R-010270 Pressure Sensor : E4-67R-010051
 <p>2<sup>nd</sup> Generation</p>  <p>3<sup>rd</sup> Generation</p>	
Boost pump	High Pressure Pump : E4-67R-010266 High Pressure Rail : E4-67R-010267 High Pressure Injectors : E4-67R-010309
	 <p>XD-3 LPG</p>  <p>XD-4 LPG</p>
Prins AFC: E4-67R-010098 E4-10R-030507	Fuel lines series XD : E4-67R-010247 XD3 E4-67R-010247 XD4

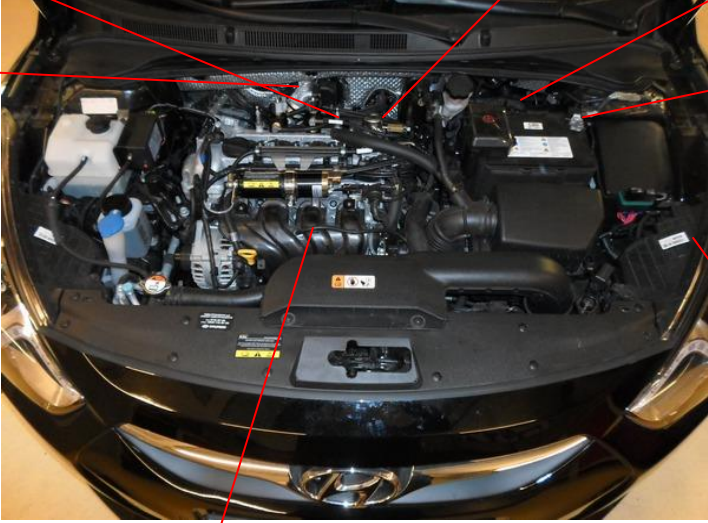

DLM-2.1 component location overview

<b>FSU</b> 		<b>HPP Pump</b> 	<b>AFC</b> 
<b>FRU</b> 			<b>Petrol ecu</b> 
			<b>Fuse / relay box</b> 
	<b>Boost pump</b> 		

	<p>R115 approval sticker : Right side centre door post</p> 
---	---

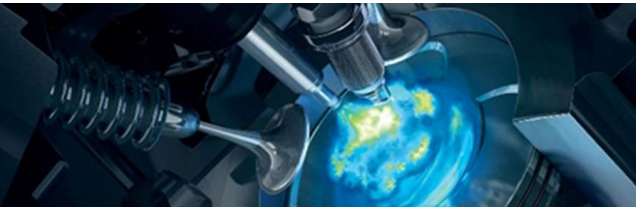



## Removal of the Bosch High Pressure Petrol Pump

### **REMOVAL-**

#### **-WARNING-**


In case of removing the high pressure fuel pump, high pressure fuel pipe, delivery pipe, there may be injury caused by leakage of the high pressure fuel.

Don't do any repair work right after engine stops ( HOT engine ).

- Turn the ignition switch OFF and disconnect the battery negative (-) cable.
- Wear safety goggles.
- Disconnect the fuel pressure regulator valve connector
- Disconnect the High Pressure fuel feed pipe (B)
- Remove the Low Pressure fuel pipe / hose (A).
- Remove the installation bolts (E), and then remove the high pressure fuel pump from the cylinder head assembly.

#### **CAUTION:**

Unscrew in turn the two bolts in small steps (0.5 turns). In case of fully unscrewing one of the two bolts with the other bolt installed, the housing surface of the cylinder head may break because of tension of the pump spring.

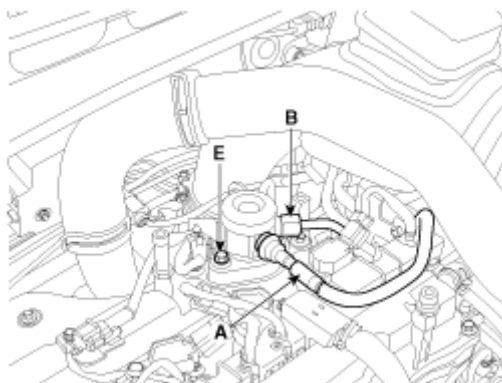

**CAREFULLY** store the removed petrol pump. Make sure no pollution can come into the pump.




## Installation of the Bosch High Pressure Petrol Pump

### **INSTALLATION**

Before installing the high pressure fuel pump, position the roller tappet ( **B&C** ) in the lowest position by rotating the crankshaft. Otherwise the installation bolts may be broken because of tension of the pump spring.

Apply engine oil to the O-ring ( **A** ) of the high pressure fuel pump, the roller tappet ( **B** ), and the protrusion ( **C** ). ( roller tappet, only if removed from cylinder head )  
Also apply engine oil to the groove on the location where the protrusion ( **C** ) is installed.

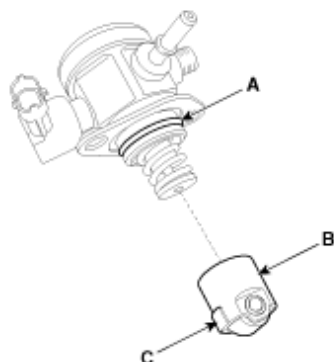

### **Installation bolts:**

When tightening the installation bolts of the high pressure fuel pump, tighten and turn the bolts in small step ( 0.5 turns ) after tightening them with hand-screwed torque.

**High pressure petrol pump installation bolt:** 12.8 ~ 14.7 N.m

### **Petrol pipe:**

First hand-tighten the nut(s) fully until they are not fastened any more in order to have them inserted in place and then completely tighten to the specified torque using a torque wrench.

If not tightening the bolts or nuts in a straight line with the mating bolt holes or fittings, it may cause a fuel leak due to broken threads.

**High pressure petrol pipe installation nut:** 26.5 ~ 32.4 N.m


Installation is reverse of removal.



## High pressure petrol pump installation



Replace the original high pressure petrol pump for the adapted high pressure petrol pump.  
( Follow the workshop manual of the car )

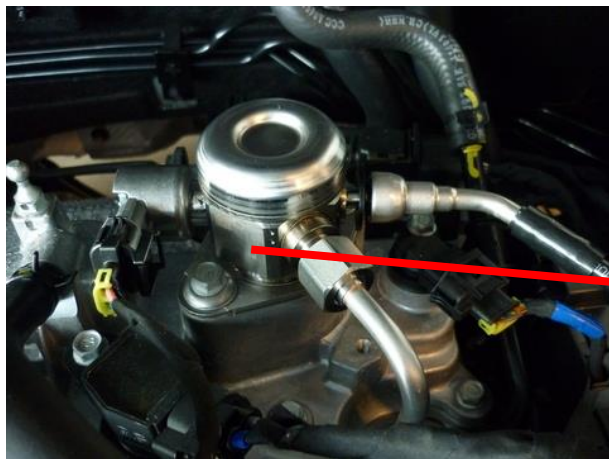


Remove the original high pressure pump.



## High pressure petrol pump LPG return



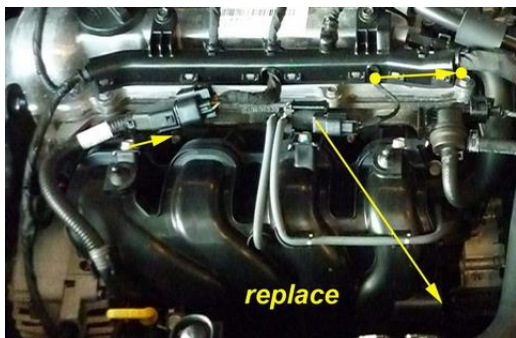

**Preparation boost pump**

Replace connector and valve




Drill up connector bracket



Re-locate wiring



Remove original bracket place new bracket

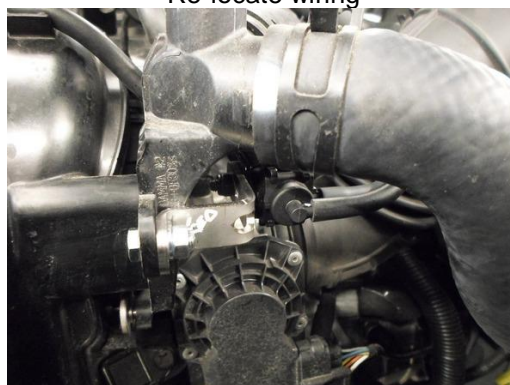

install a spring washer and M6nut




Install a new longer hose to the valve and cut the long hoses in 8cm





## Installation boost pump.

Connect the fuel hoses to the boost pump.







## Connection of the fuel hose to the boost pump.

Connect the fuel hoses with an adapter to the boost pump.




Connect the line to the shortcut to the fuel line with quick release that comes from the high pressure pump

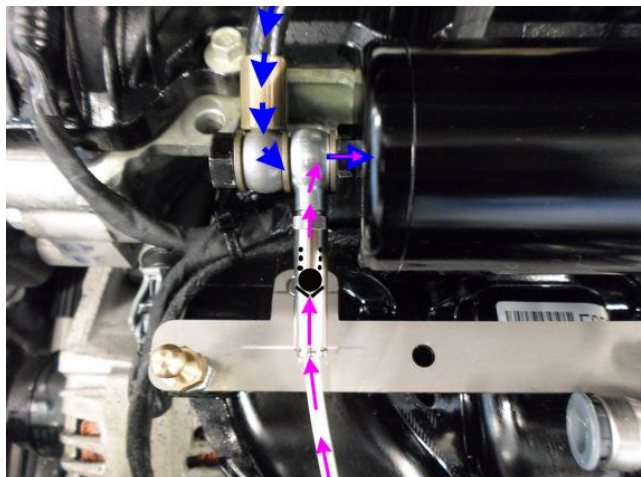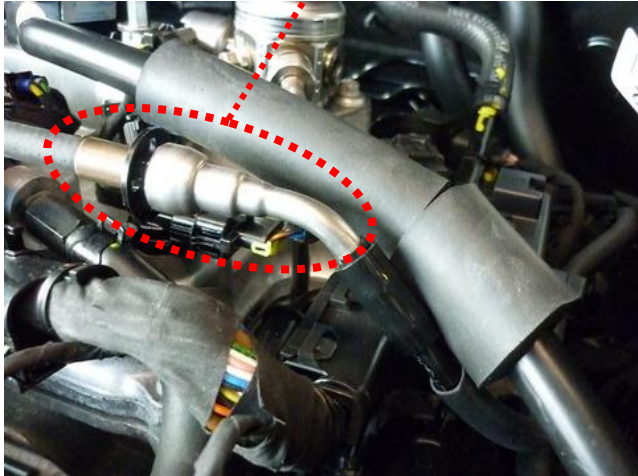

Valve protector connection.



Fuel Supply Unit / Fuel Return Unit

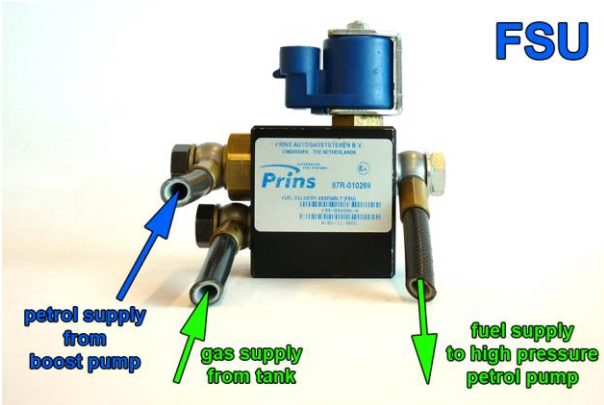


**FSU**

petrol supply from boost pump

gas supply from tank

fuel supply to high pressure petrol pump

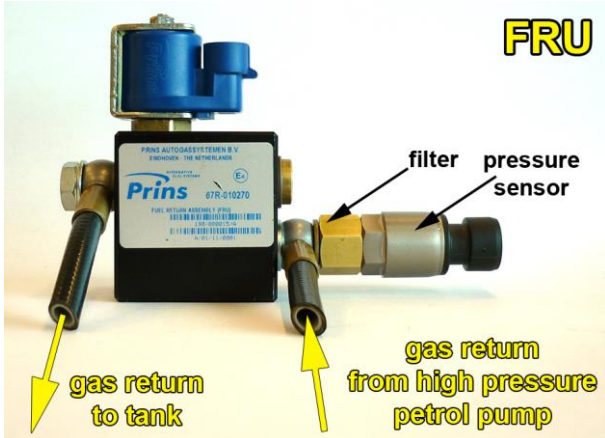


**FRU**

gas return to tank

filter

pressure sensor

gas return from high pressure petrol pump

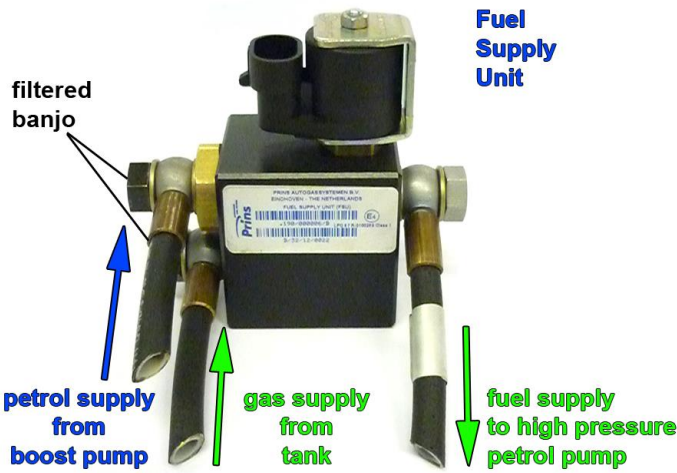


**Fuel Supply Unit**

filtered banjo

petrol supply from boost pump

gas supply from tank

fuel supply to high pressure petrol pump

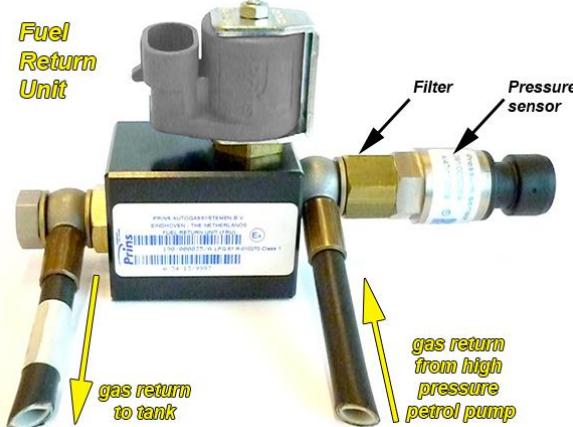

**Fuel Return Unit**

gas return to tank

Filter

Pressure sensor

gas return from high pressure petrol pump


Black filtered banjo will only be used on inlet connections !

Filter inside sensor banjo





Mounting the Fuel Units

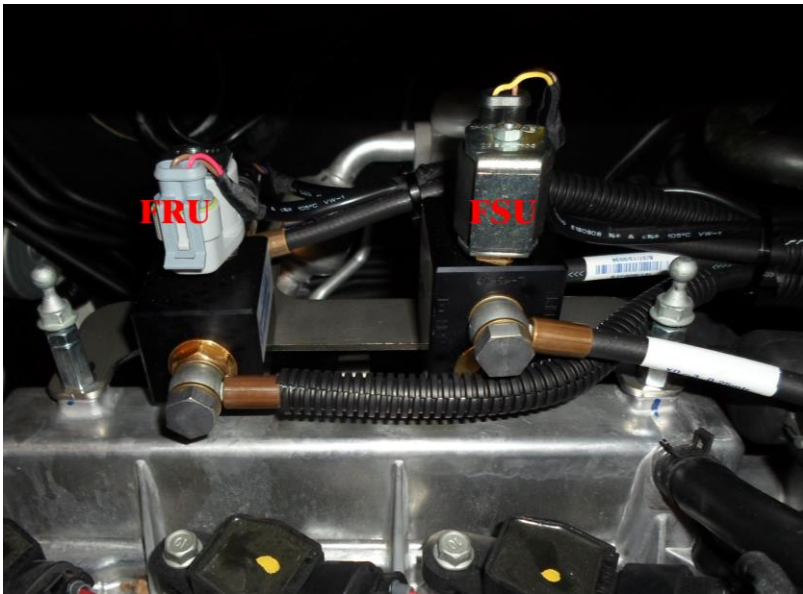


Treaded end M6x30




Spring washer and extended nut



Original stud bolt with M6 nut

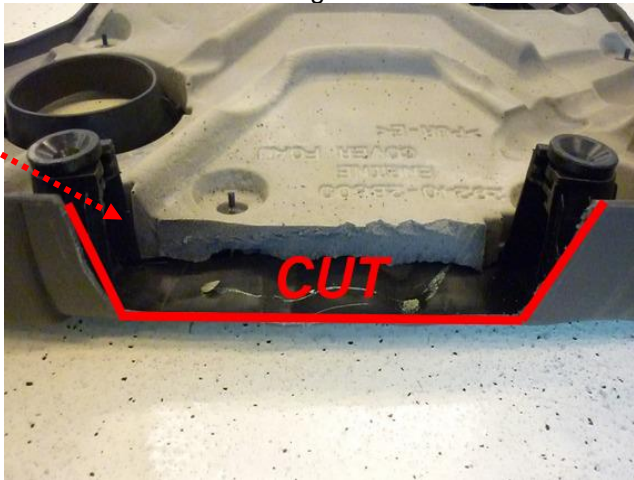

Adapt engine cover on the back side

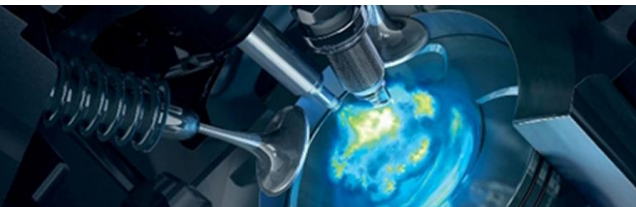

Lpg / petrol fuel lines

Hose		from	to	Length ( cm )
1	XD-	Adapter original petrol hose	Petrol boost pump	40
2	XD-	Fuel supply unit	High pressure petrol pump	25
3	XD-	Petrol boost pump	Fuel supply unit	55
4	XD-	Fuel return unit	High pressure petrol pump	50

1


2

3


4



Install the fuel line using two bonded seal washers and banjo bolt :

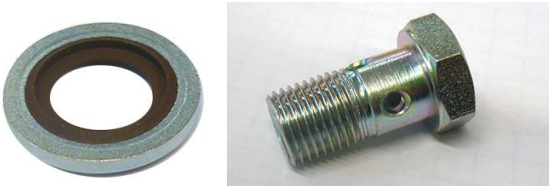


**Filtered banjo:** ( FSU supply inlets / boost pump inlet : black filtered banjo ) :

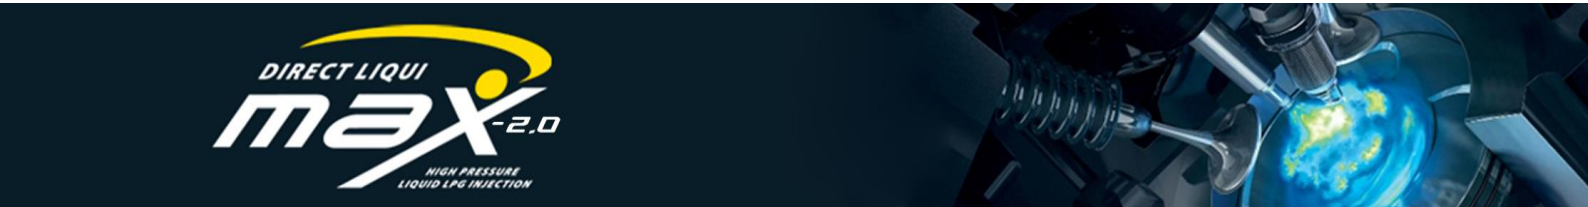




### Supply hose – Return hose – Tank wiring

Mounting the supply- and return hose together with a clamps Ø15mm and pull the wiring harness at the fuel lines with a tension bar. Mount the “hose” with clamps, with a maximum distance of 20cm.

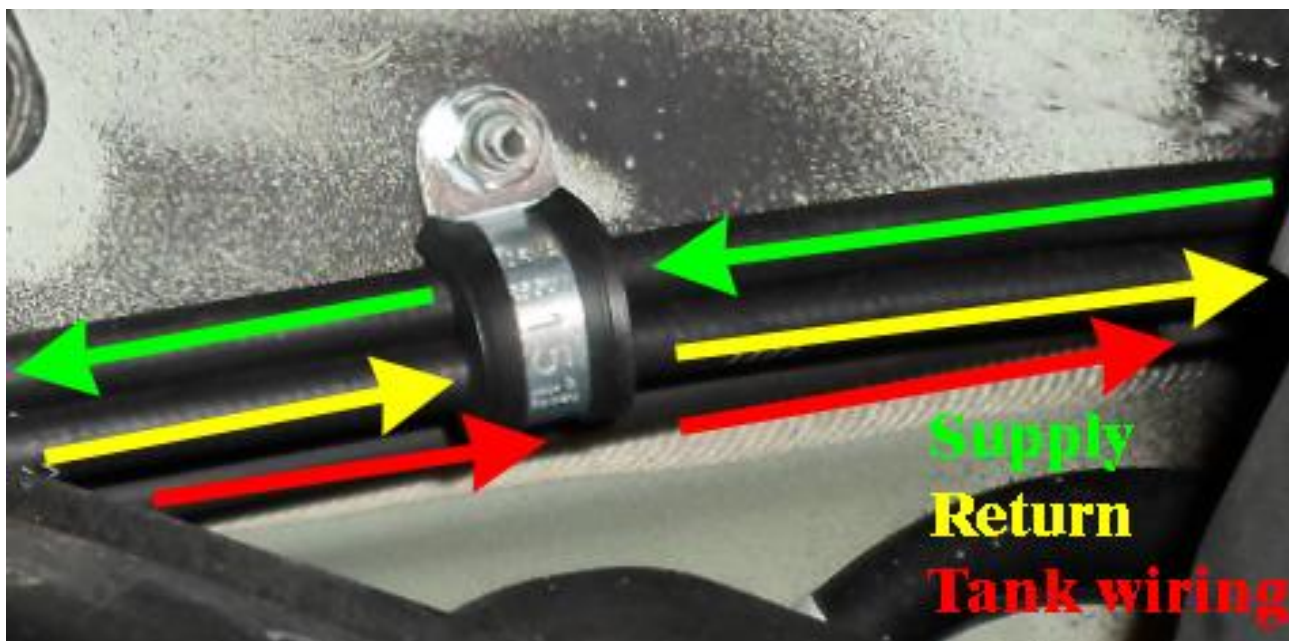


Hose routing 1


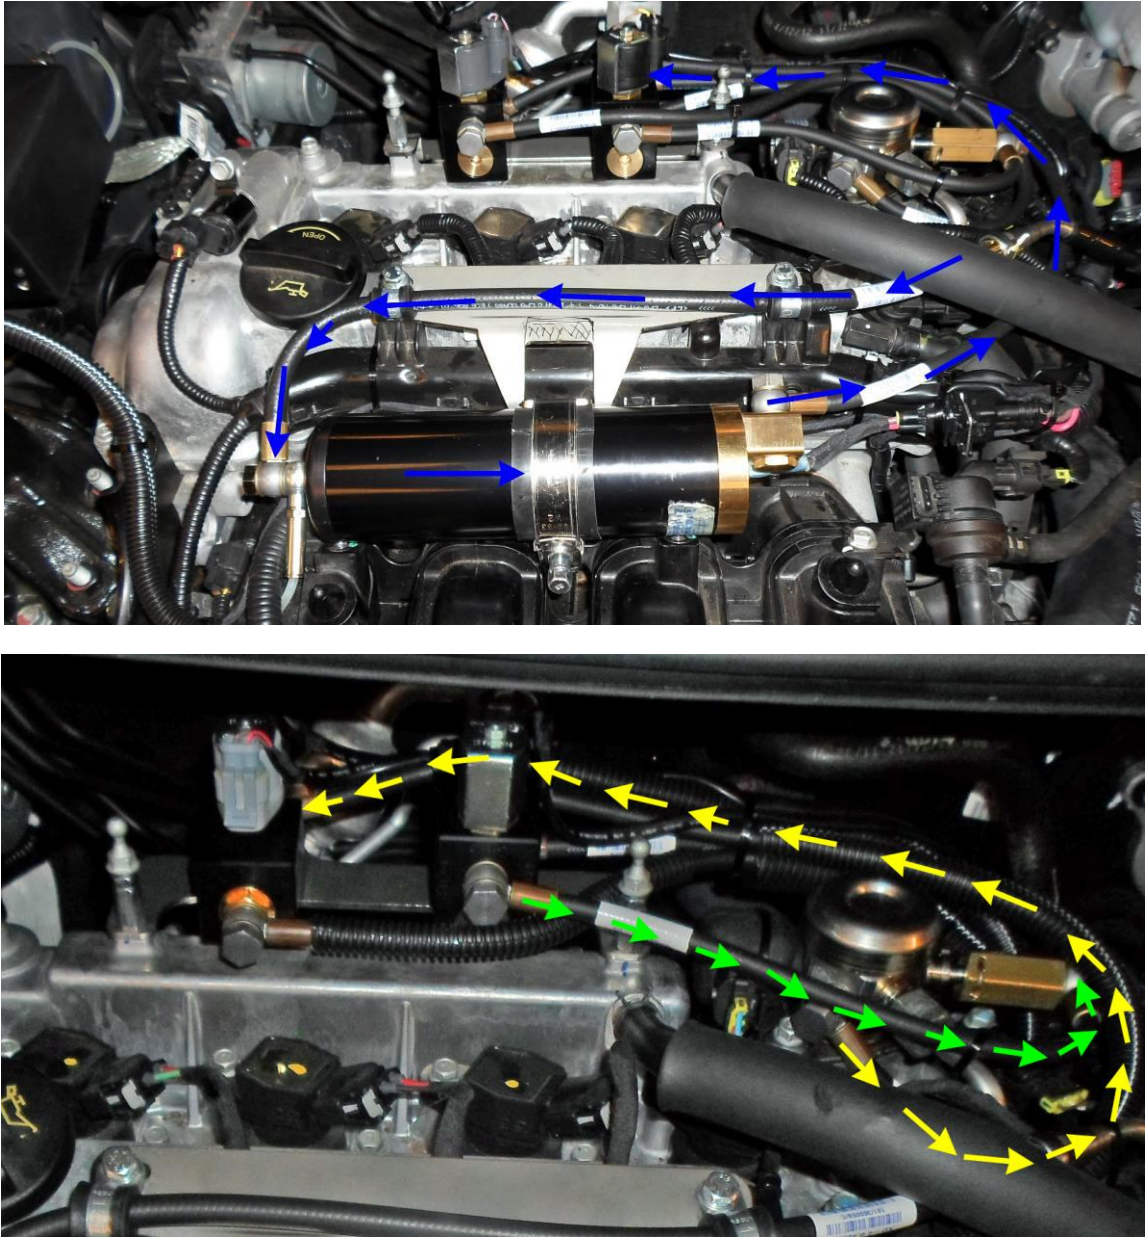




Hose routing 2

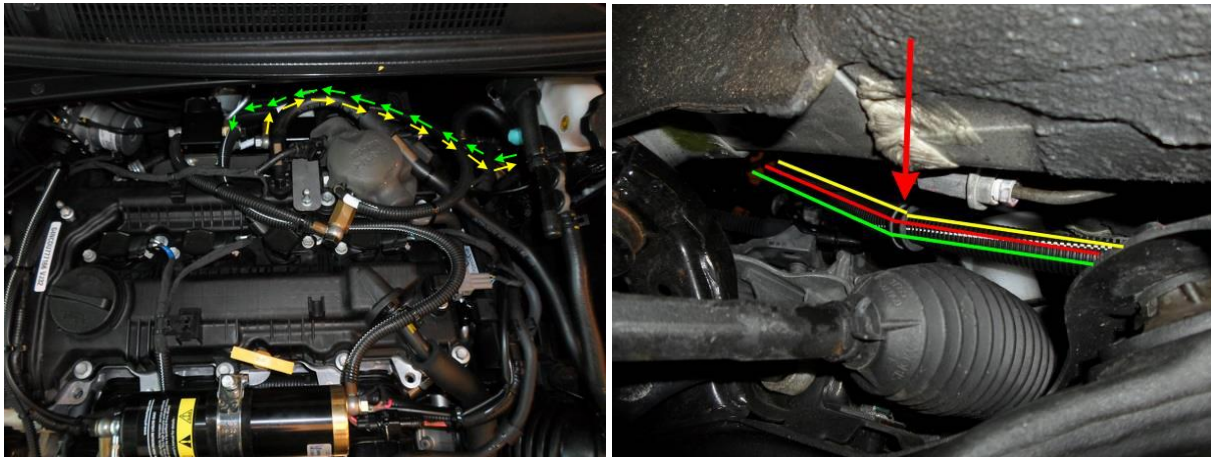


700mm protective tube

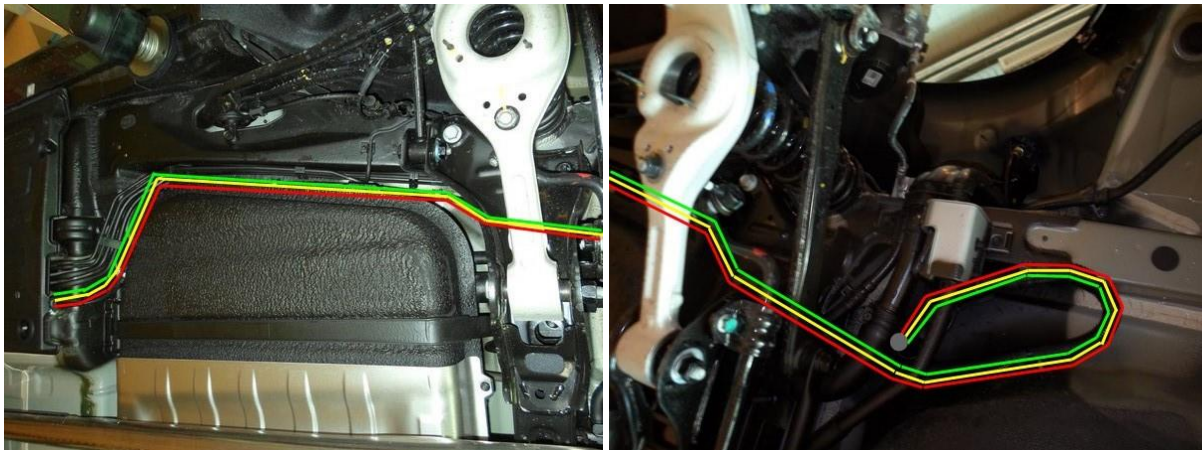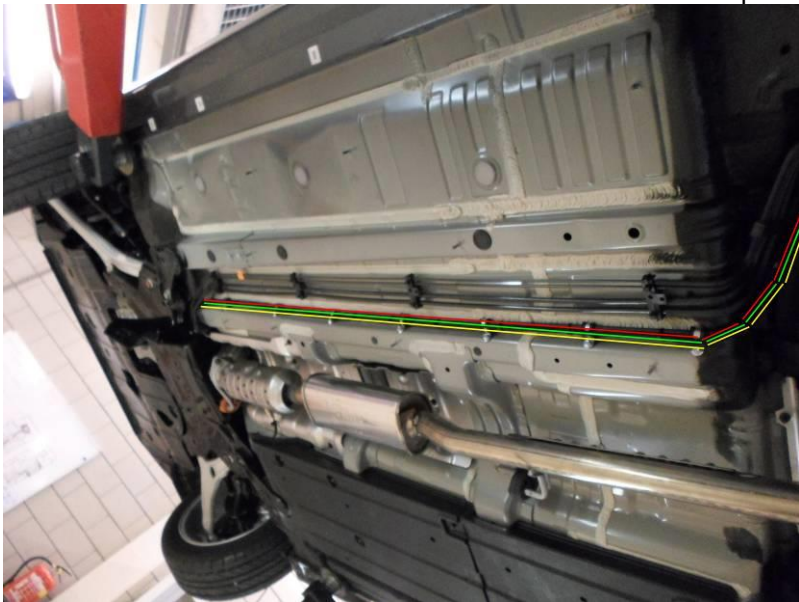





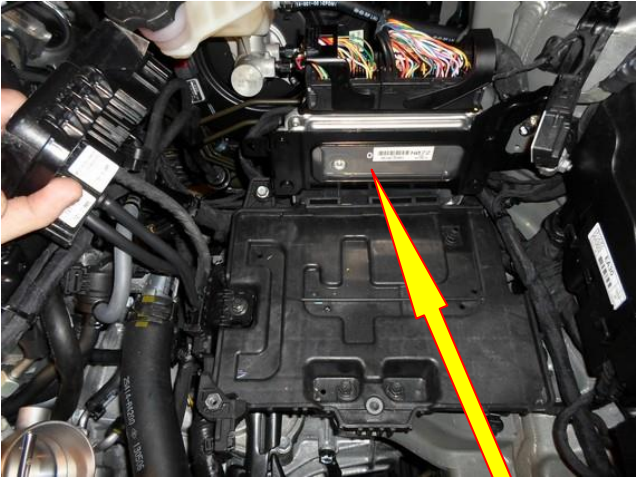

Mounting the AFC / fuse and relays




Remove the battery mounting plate.








Install the battery mounting plate back.




Fuse relay box and diagnose connector .



Mounting point original m6 nut

## Wiring routing

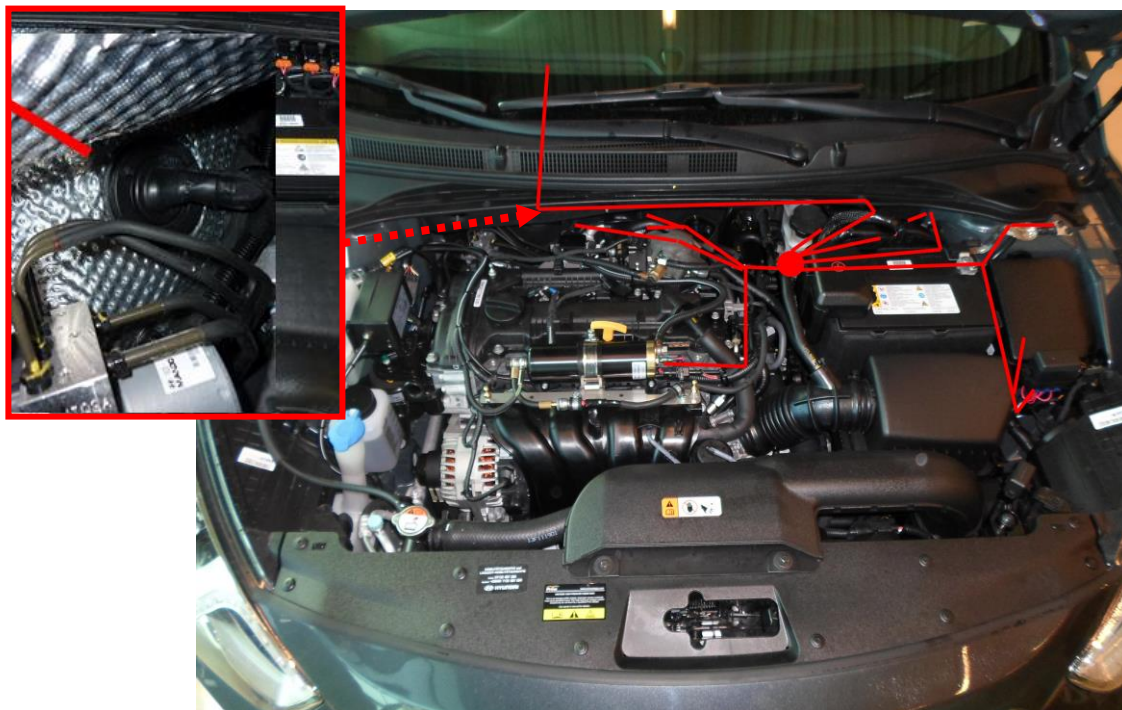

Wiring harness the DLM system.







## Mounting the fuel selection switch



Mount the switch.

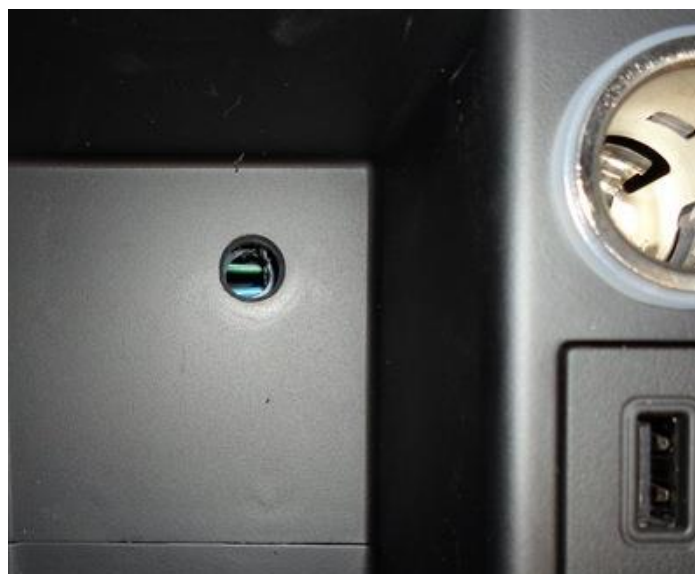
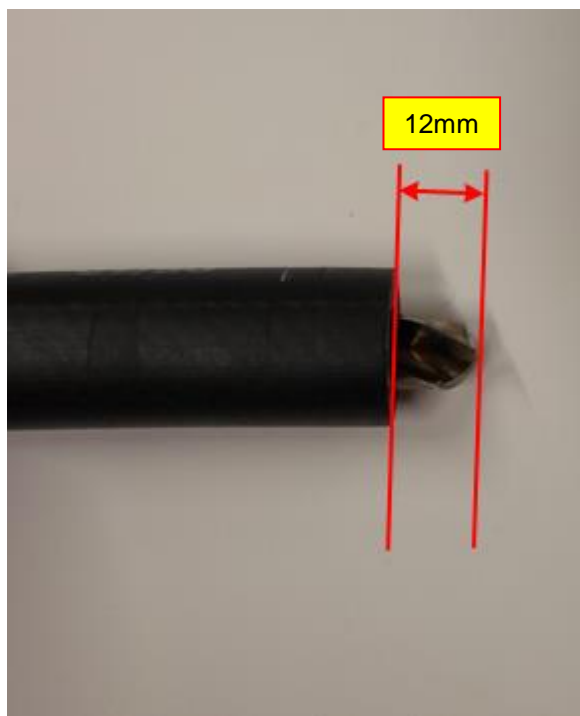





## Electrical connections

Check and measure the wiring in case of changes in the cars wiring colours.  
Insulate not used wires.


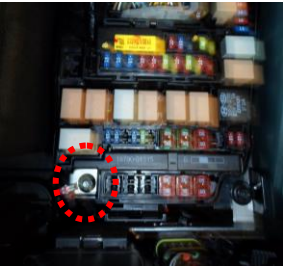
### Driver room

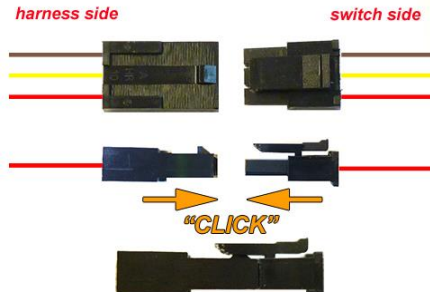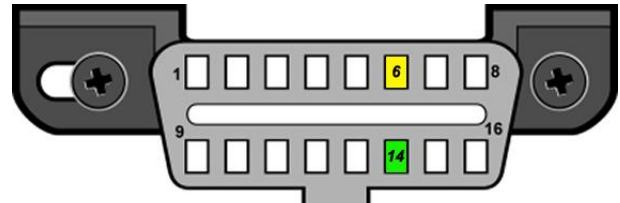
Wire number / code	Wire colour	Connection
3-pole micro connector 66 Ground fuel switch 3 +12V fuel switch 49 LIN fuel switch	Brown-black Red-white Yellow	Connect the 3-pole connector to the Prins fuel selection switch.
		
51 CAN-High	Yellow	EOBD connector pin 6
70 CAN-Low	Green	EOBD connector pin 14
		
40 Wake-up	Grey-red	wake-up Wire colour : <b>Red</b> Wire location : <b>Driver side fuse box black connector Pin 11</b>

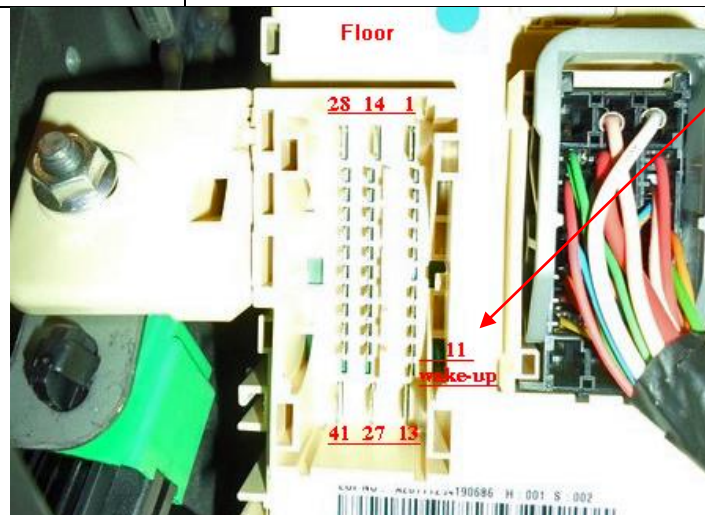

## Electrical connections

Check and measure the wiring in case of changes in the cars wiring colours.  
Insulate not used wires.

Wire number / code	Wire colour	Connection	
1-32 MAIN GND ecu MAIN GROUND SENSE	Brown	Connect to the '-' of the battery ( -31 ) ; use a ring terminal. Wire location : <b>Original ground point left spring strut.</b>	
4 – 13 +12V BATT sense +12V BATT fused +12V BATT boost pump +12V BATT pump driver	Red	Connect to the '+' of the battery ( +30 ) ; use a ring terminal. <b>Do not place the fuses</b> before having completed the installation of the lpg system. Wire location : <b>Fuse box original M6 nut.</b>	

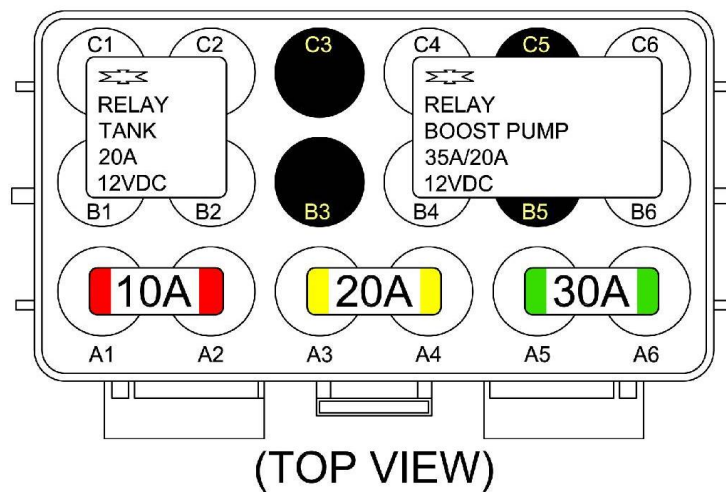

## Electrical connections

**Check and measure the wiring in case of changes in the cars wiring colours.  
Insulate not used wires.**

<b>Wire number / code</b>	<b>Wire colour</b>	<b>Connection</b>
		High pressure petrol sensor signal interruption Wire colour : <b>White</b> Wire location : Petrol ecu <b>MK pin 58</b>
36 Analog 6	Blue-brown	Sensor side
25 Simulation 1	Green-white	Petrol ecu side
18 Ad1 (Map)	Blue-white	Wire colour : <b>Green/white</b> Wire location : Petrol ecu <b>MK pin 80</b>
8 RPM	Purple-white	For measuring the engine speed signal. Wire colour : <b>White</b> Wire location : petrol ecu <b>MK pin 65</b>
15 T-ect	Grey	For measuring the engine coolant temperature. Wire colour : <b>Yellow</b> Wire location : Petrol ecu <b>MA pin 23</b>
7 +12V IGNITION	Grey-white	Make a connection to ignition + / contact + ( +15 ). Do not place the fuse in the holder before having completed the installation of the lpg system. Wire colour : <b>Pink</b> Wire location : petrol ecu <b>MK pin 29</b>
63 Ground Shift	Blue-orange	High pressure petrol sensor ground Wire colour : <b>Yellow</b> Wire location : Petrol ecu <b>MK pin 76</b>
61 DI-4 (FRP +5Volt)	Yellow-blue	High pressure petrol sensor 5Volt Wire colour : <b>Pink</b> Wire location : Petrol ecu <b>MK pin 20</b>
40 Wake-up	Grey-red	High pressure petrol sensor 5Volt supply / car wake-up Not used






## MFI Control System (G4FD : GAMMA 1.6L GDI M/T) (2)

SD313-10

## Full Circuit Diagrams

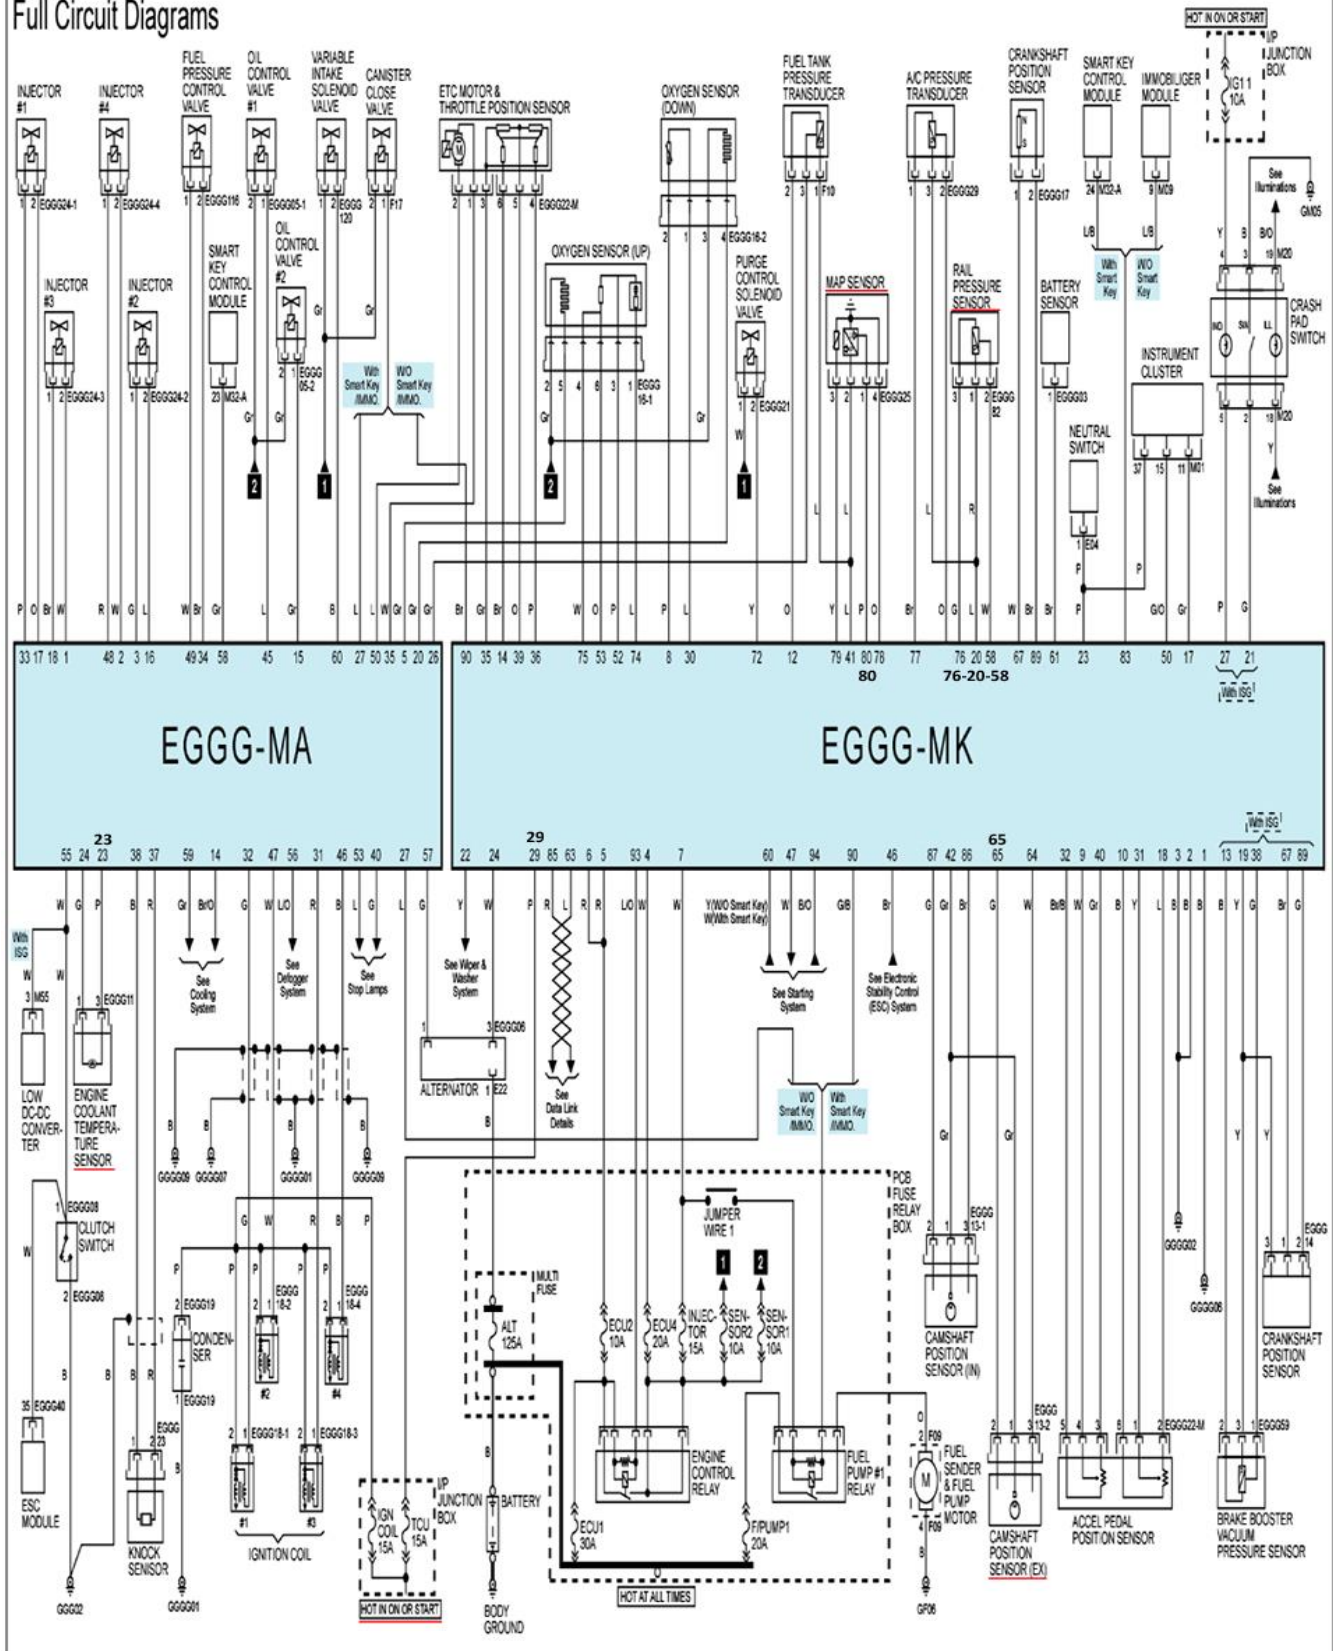


**Electrical connections**

**Check and measure the wiring in case of changes in the cars wiring colours.  
Insulate not used wires.**

**Engine room**

Wire number / code	Wire colour	Connection
<i>3-pole connector</i>		
35    Ground Psys pin A 9       +5V sensor    pin B 16    Psys            pin C	Brown Red-blue Green	Connect the 3-pole connector to the P-sys sensor positioned into the Fuel Return Unit. Sensor wire pin A Sensor wire pin B Sensor wire pin C
<i>2-pole connector FSU, black</i>		
24    + Lock-off FSU 31    C Ground	Yellow-green Brown-black	Connect the 2-pole connector to the lock-off valve of the Fuel Supply Unit
<i>2-pole connector FRU, grey</i>		
43    + Lock-off FRU 34    C Ground	Red-white Brown-black	Connect the 2-pole connector to the lock-off valve of the Fuel Return Unit
<i>4-pole diagnose connector</i>		
46    Service TxD 65    Service RxD 68    C Ground	Grey Grey Brown-black	Diagnose connector for service / diagnosis Connector pin 1 Connector pin 2 Connector pin 4
<i>Boost pump relay</i>		
2       + relay boost pump 26    Ground BP relay +12V fused BATT +12V Boost pump	Red-white Purple-blue Red 2.5mm2 Red 2.5mm2	Pin 86 of the boost pump relay C4 Pin 85 of the boost pump relay B6 Pin 30 of the boost pump relay C6-A5 Pin 87 of the boost pump relay B4
<i>Wiring tank pump driver relay</i>		
57    + driver relay 73    LSS 4 tank relay +12V BATT fused +12V driver	Red-white Purple-blue Red 2.5mm2 Red 2.5mm2	Pin 86 of the driver relay C1 Pin 85 of the driver relay B2 Pin 30 of the driver relay C2-A4 Pin 87 of the driver relay B1

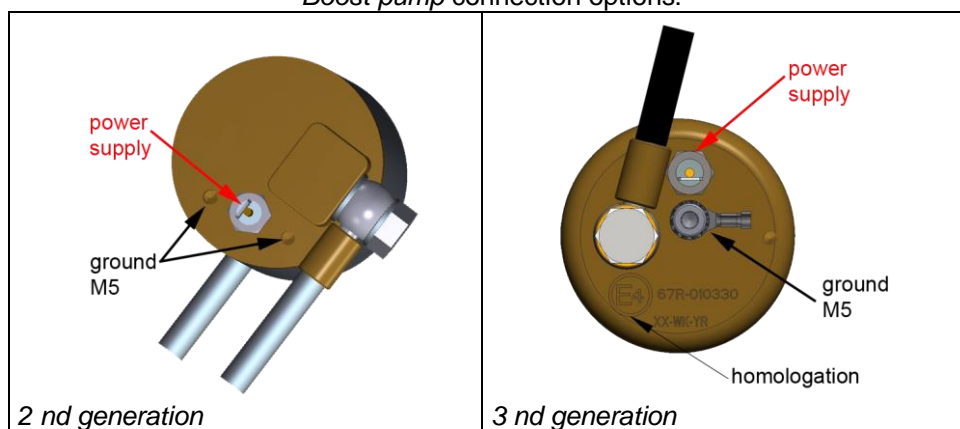
*Boost pump connection options:*

## Electrical connections

Check and measure the wiring in case of changes in the cars wiring colours.  
Insulate not used wires.

### Lpg tank housing


Wire number / code	Wire colour	Connection
<b>3-pole tank level connector</b> 33 Ground tank gauge 12 Tank level in 11 + tank level supply	Brown-black Blue Red-blue	Connect the 3-pole connector to the tank level sensor.
<b>2-pole driver connector</b> 71 LSS 3 PWM driver 64 AD 5 driver diagnose	Purple-pink Blue-grey	Connect the 2-pole connector to the pump driver (4).
<b>1. 2-pole connector tank lock-off</b>	Green-yellow Brown	From tank pump driver From tank pump driver
<b>2. 3-pole connector tank pump</b>	Red 2.5mm <sup>2</sup> Brown 2.5mm <sup>2</sup>	From tank pump driver From tank pump driver
<b>3. 2-pole connector power driver</b>	Red 2.5mm <sup>2</sup> Brown 2.5mm <sup>2</sup>	From tank pump relay 87 From main ground
<b>4. 2-pole connector driver</b>	Green Grey	From AFC pin 71 pwm From AFC pin 64 diagnose

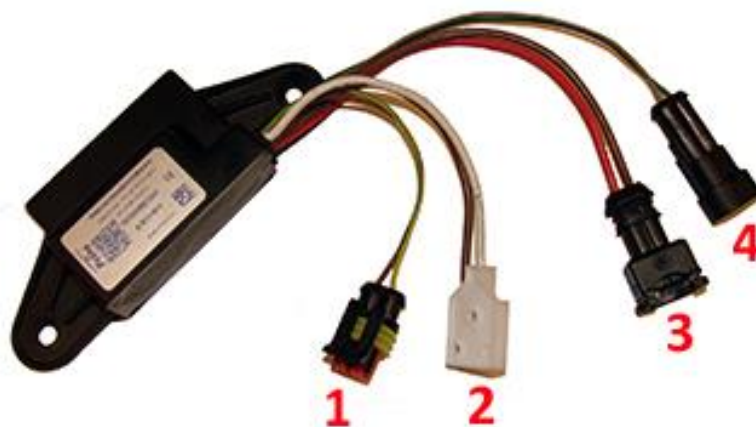




Prins R-115 and R-67 sticker


R-115





Right door centre pillar

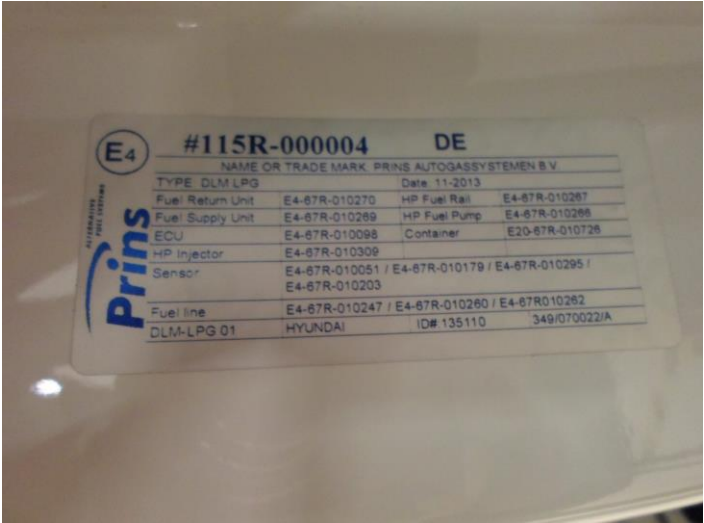


R-67

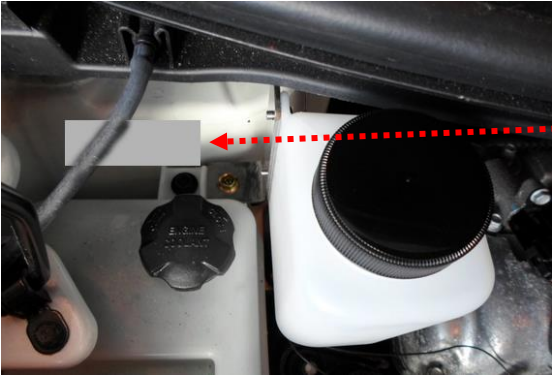

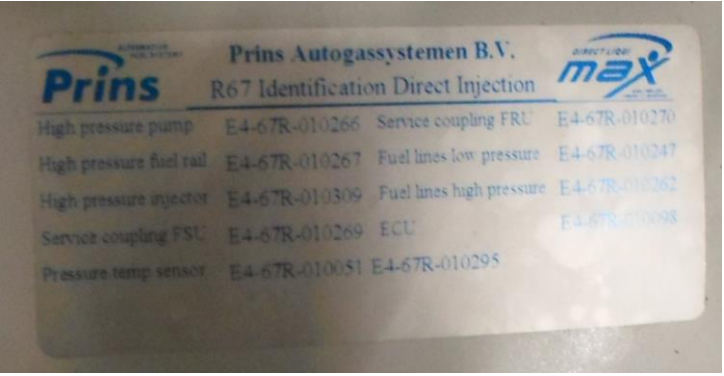


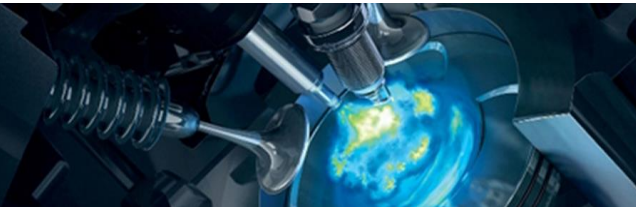

Prins safety stickers

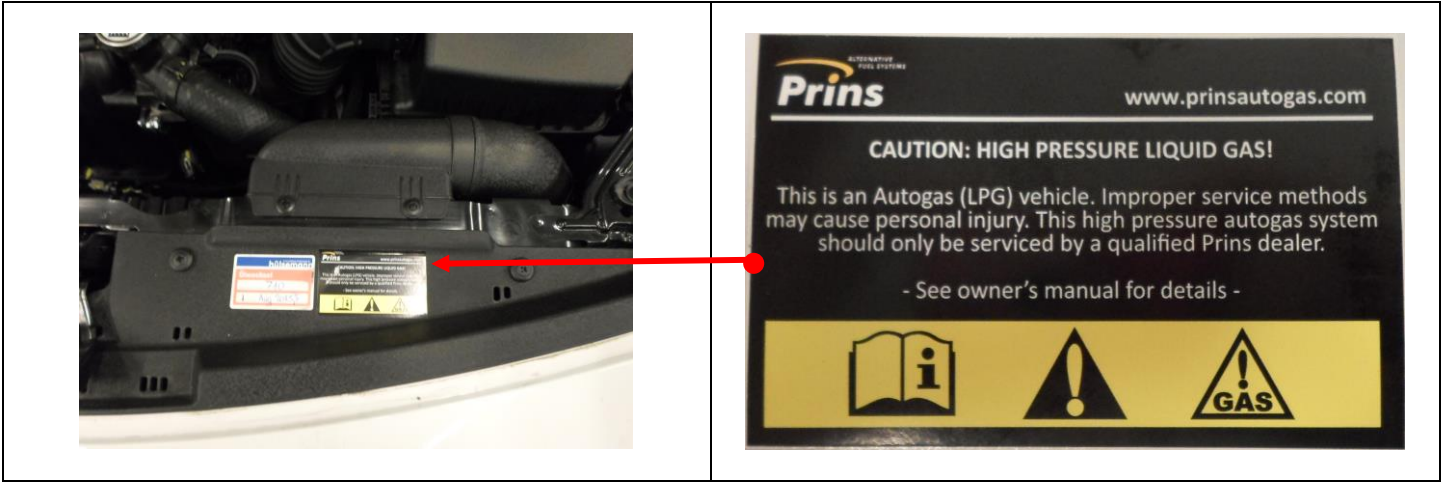

LPG TANK

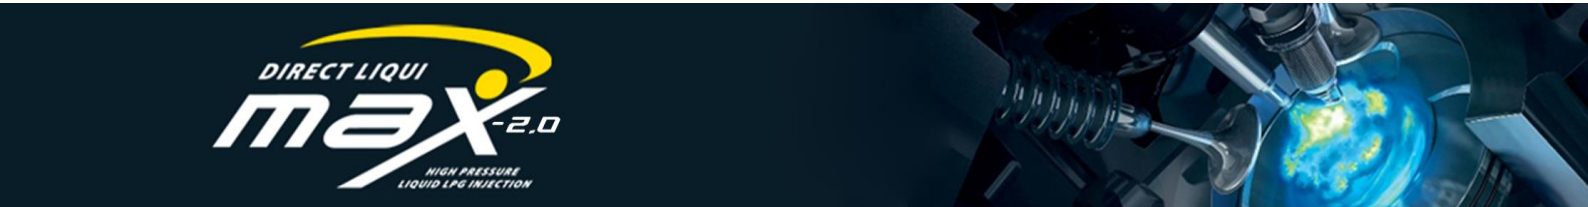



## Checklist after installation

1. Install the system fuses.  
Turn on ignition.  
Connect the Prins interface wire and run the Prins diagnosis program.  
When working on the car, beware of moving and rotating parts in the engine compartment ( even when the engine is not running !! ).
2. When commissioning the LPG system, you must activate the AFC with the diagnosis software.
3. Check whether the program in the AFC matches with the car ( dedicated engine set ):  
See "Identification" in the diagnosis program.
4. Check all components and connections for any LPG leakage, use a LPG leak detector device or a fluid detection like soap. Also check for petrol leakage. Make sure the solenoid valves are in open position.  
No evidence of leakage is permitted.  
Caution for moving and rotating parts in the engine compartment !
5. Use the diagnosis software to check again all input and output signals.
6. Check the system for error codes and solve these, if required.  
Check the petrol MMS for EOBD error codes.  
Place the protection connector back on the diagnose connector.
7. Make a test drive and check the cars drivability on LPG and petrol.

