



Quality, innovation and customer care, it's in our nature



installation manual Engine Kit part 2/2



MANUFACTURER
TYPE
ENGINE DISPLACEMENT
NUMBER OF VALVES
ENGINE CODE / NUMBER
VEHICLE CATEGORIES
TRANSMISSION
VERSION
PETROL ECU MANUFACTURER / CODE
HIGH PRESSURE PETROL PUMP
HIGH PRESSURE PETROL INJECTOR
MODEL YEAR:
SYSTEM APPROVAL NUMBER (R115)
LOCATION R115 SYSTEM STICKER
ENGINE SET NUMBER
MANUAL NUMBER
DATE

KIA
SORENTO
2400
16V
G4KJ
M
MT/AT
AFC-2.1
CONTINENTAL SIM2K
KEFICO
BOSCH
2013
E4-115R-0000-04/17 / DLM-LPG 01/10
right side, centre door post
349/070077/A / 349/070079/A
076/2891100
7-10-2015



TABLE OF CONTENTS

General instructions	2
Required equipment / tools / materials for installing a complete system	3
Vehicle check	3
Tightening moments.....	4
Direct LiquiMax-2.0, AFC-2.1	5
Direct LiquiMax-2.0 diagram, AFC-2.1.....	6
Direct LiquiMax parts / approval numbers	7
DLM component location overview	8
Removal of the Bosch High Pressure Petrol Pump	9
Installation of the Bosch High Pressure Petrol Pump	10
High pressure petrol pump installation.....	11
High pressure petrol pump installation 2.....	12
High pressure petrol pump installation 3.....	13
High pressure pump return	14
Boost pump bracket	15
Connection of the fuel hose to the boost pump.	16
Fuel Supply Unit / Fuel Return Unit.....	17
Mounting the Fuel Supply and Fuel Return Unit.....	18
Boost pump connections.....	19
Mounting the Valve Protector unit	20
LPG / petrol fuel lines.....	21
Hose routing.....	22
Hose routing 2	23
Hose routing 3	24
Mounting the AFC-2.1	25
Mounting the fuse / relay box	26
Wiring AFC	27
Mounting the fuel selection switch	28
Switch connections.....	29
Electrical connections	30
Electrical connections	31
Electrical connections	32
Valve protector connections.....	32
Electrical connections	33
Electrical connections	34
Checklist after installation	35
FOR EXPLANATION AND CIRCUIT DIAGRAMS SEE : INSTALLATION MANUAL GENERAL PART 1 / 2	

General instructions

- The installation of the system shall be done in accordance with the installation manual provided by Prins Autogassystemen.
- This manual is based on Dutch regulations, always install the system in accordance to the local regulations.
- For an optimal functioning of the Direct LiquiMax-2.0 system, maintain a clean and organized work environment during installation and maintenance to prevent pollution of the LPG components.
- Always download the "general manual 1/2 " from our website for basic instructions and diagrams.
- Always **disconnect the battery when installing / servicing** the LPG system. Make sure the ignition key is outside the car.
Be aware of central door locking, radio / telephone memory code, alarm system.
- Wear safety goggles when working on the petrol filled system / connections (pressurized petrol)
- Do not place the main fuse into the fuse holder before having completed the installation of the system.
- The AFC has to be activated by means of the Prins diagnosis software.
- Never disconnect the AFC connector, unless you have removed the main fuse.
- When installing the wiring harness, ensure that it does not run near any of the ignition components.

Solder and insulate all electrical connections.

The wires in the loom are provided with numbers and text. The text on the wire explains the function of the wire.

The wire harness is not model specific, therefore it may be necessary to adjust the length of the wires.

Ensure maximum care is taken when connecting wiring.

Make professional joints using solder and shrink sleeve. Do not stretch the wiring harness.

- No component of the LPG-system shall be located within 100 mm of the exhaust or similar heat source, unless such components are adequately shielded against heat.
- If holes have to be drilled (wear safety glasses) for installing brackets, etc., the drilled holes must always be treated with an anti-corrosion agent, after the chips have been removed (especially when mounting a exterior filler into body work).
- After having completed the installation, check the whole system for LPG leakage; use a LPG leak detection device. Also check for leak of engine coolant, petrol and air.
- Fitting and maintenance is only allowed by Prins Autogassystemen selected LPG engineers.
- Failure to follow the instructions in this manual can result in a poor or non-working LPG installation or a dangerous situation.
- For maintenance instructions see owner manual.
- Prins Autogassystemen is not responsible for any damages to people or objects as a result of changes to Prins products.
- Check our website regularly for diagrams, certificates, updates, info-bulletins and product information.

Register (warranty card) the system on the Prins warranty portal .



Required equipment / tools / materials for installing a complete system

- Complete workshop toolbox (wrenches, screwdrivers, cutters, pliers, ratchet, sockets)
- Car lift
- Portable computer
- Vehicle fuel system scan tool or OBD scan tool Prins (part nr. 099/99928)
- Exhaust gas analyser
- Multimeter
- Oscilloscope
- Prins diagnostic software
- Prins serial interface
- Torque wrench (5-50Nm)
- Torque wrench (200-250Nm)
- Portable light
- Assortment drill bits 4 to 12 mm
- Assortment cutters (ø 20, 30, 50, 70 mm)
- Portable drill or pneumatic drill
- Thread cutting device (male M6x1, M8x1, M10x1)
- Air gun
- Vacuum cleaner
- Safety goggles
- Hot air gun
- Soldering iron, soldering tin
- Wire-stripping pliers
- Adhesive tape
- Adhesive sealant
- Thread locking compound
- Anti-corrosion agent / black body coating
- Gas leak detection device or foam leak spray
- Shrink sleeves

Vehicle check

- Check the vehicle drivability on petrol
- Check the fuel system for error codes (scan tool)
- Check if the catalytic converter is in good condition (exhaust gas analyzer)
- Check the condition of the ignition system (spark plugs, cables, coil)

Tightening moments

	Nm	Spanner mm
M 4 x 0,7	3.3	7
M 5 x 0,8	6.5	8
M 6 x 1,0	11.3	10
M 7 x 1,0	14.5	11
M 8 x 1	24.5	13
M 8 x 1,25	27.3	13
M 10 x 1	52	15-16-17
M 10 x 1,5	54	15-16-17
(filtered) Banjo bolt	10	14
Supply line connection	15	13
Fuel module Allen bolts	20	7
Filler hose connection	50	22
Boost pump clamp	7	10
High pressure petrol fuel line	24-35	17
Hitachi HPP cover	220	46


EXPLANATION OF SYMBOLS :




= IMPORTANT, CAUTION



= WEAR SAFETY GOGGLES

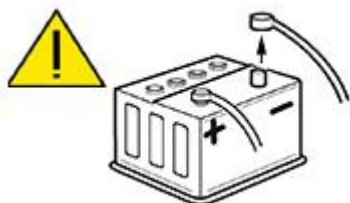



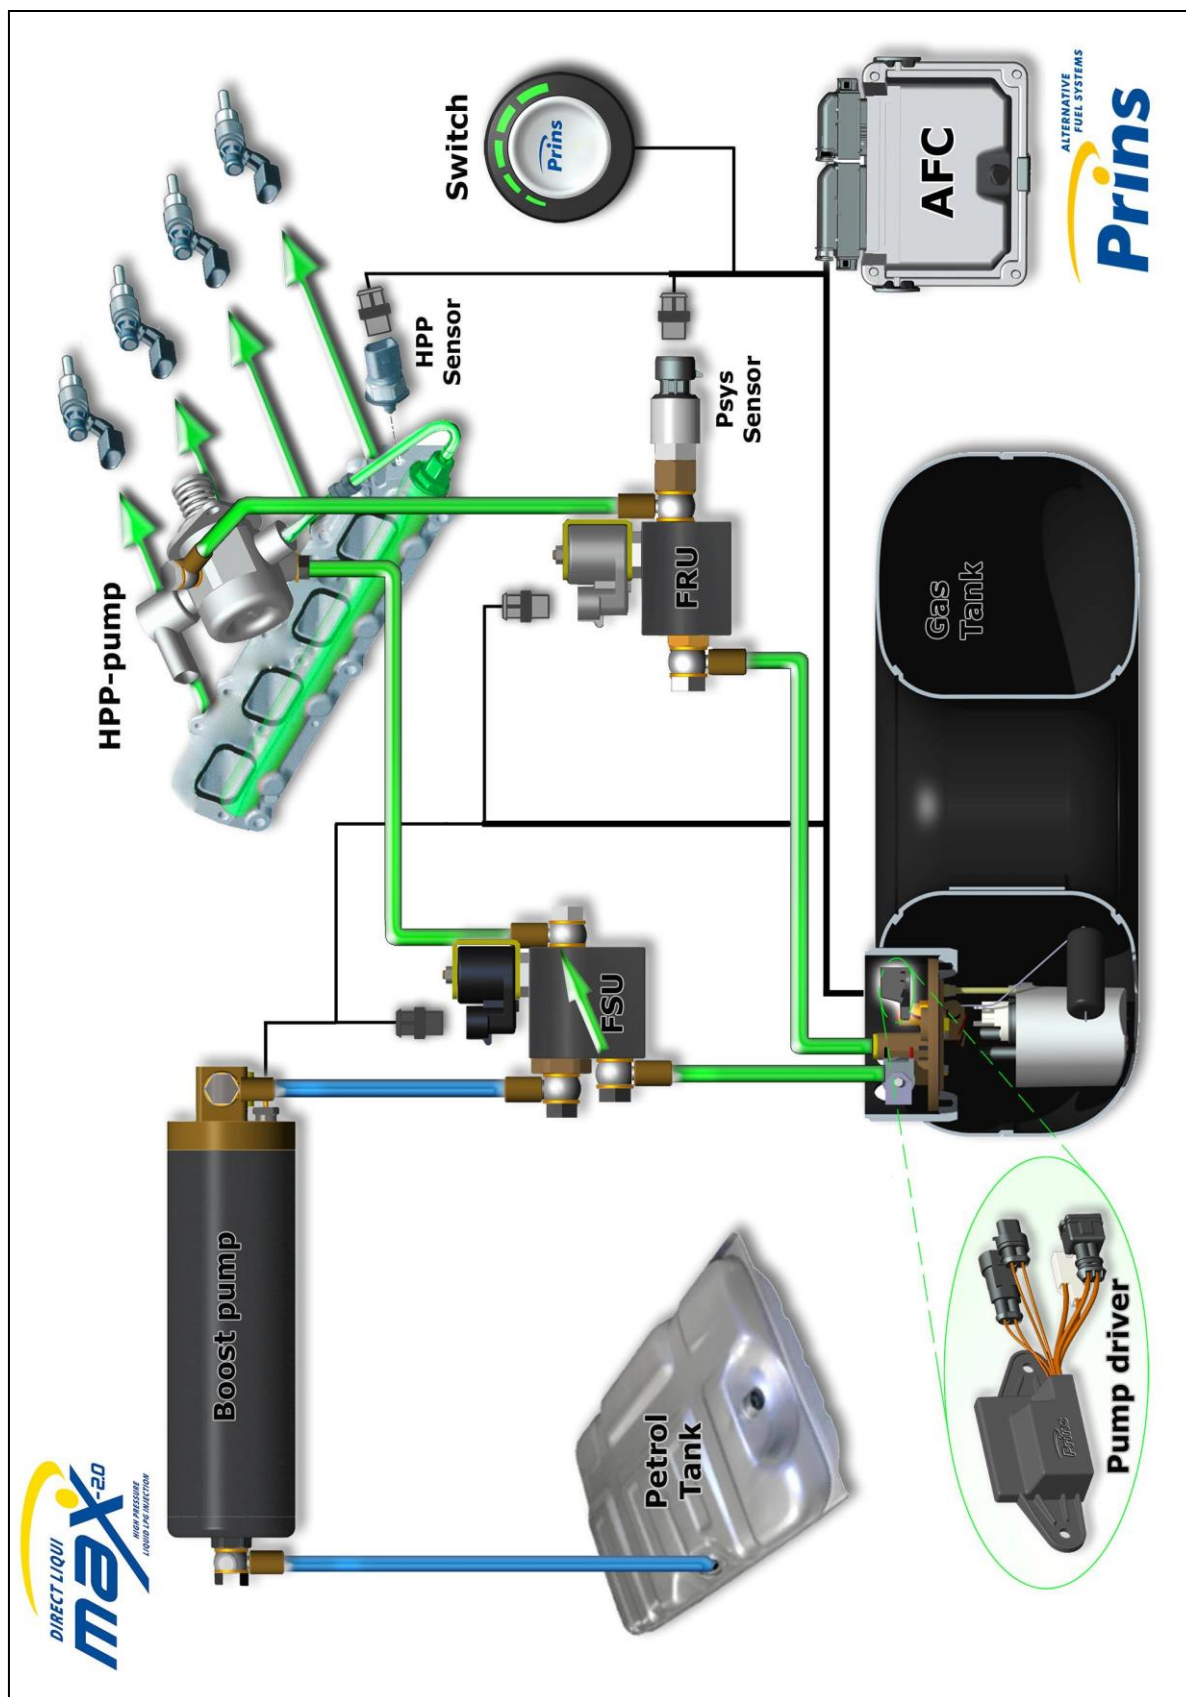




Direct LiquiMax-2.0, AFC-2.1




Direct LiquiMax parts / approval numbers

<div><p>1st generation</p><p>2nd generation</p></div>	<div><p>1st generation</p><p>2nd generation</p></div>
Fuel Supply Unit : E4-67R-010269	Fuel Return Unit : E4-67R-010270 Pressure Sensor : E4-67R-010051
	
Boost pump	High Pressure Pump : E4-67R-010266 High Pressure Rail : E4-67R-010267 High Pressure Injectors : E4-67R-010309
	<div><p>XD-3 LPG</p><p>XD-4 LPG</p></div>
Prins AFC: E4-67R-010098 E4-10R-030507	Fuel lines series XD : E4-67R-010247 XD3 E4-67R-010247 XD4

DLM component location overview

<p>HPP pump</p> 		<p>Petrol ECU</p>
<p>FSU</p> 		<p>AFC</p> 
<p>FRU</p> 		<p>Fuse / relay box</p> 
<p>Boost pump</p> 		

	<p>R115 approval sticker : Right side centre door post</p>
---	--

Removal of the Bosch High Pressure Petrol Pump

REMOVAL-

WARNING-


In case of removing the high pressure fuel pump, high pressure fuel pipe, delivery pipe, there may be injury caused by leakage of the high pressure fuel.

Don't do any repair work right after engine stops (HOT engine).

- Turn the ignition switch OFF and disconnect the battery negative (-) cable.
- Wear safety goggles.
- Disconnect the fuel pressure regulator valve connector
- Disconnect the High Pressure fuel feed pipe (B)
- Remove the Low Pressure fuel pipe / hose (A).
- Remove the installation bolts (E), and then remove the high pressure fuel pump from the cylinder head assembly.

CAUTION:

Unscrew in turn the two bolts in small steps (0.5 turns). In case of fully unscrewing one of the two bolts with the other bolt installed, the housing surface of the cylinder head may break because of tension of the pump spring.

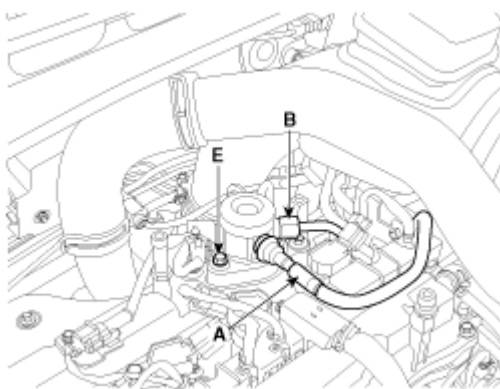


CAREFULLY store the removed petrol pump. Make sure no pollution can come into the pump.

Installation of the Bosch High Pressure Petrol Pump

INSTALLATION-

Before installing the high pressure fuel pump, position the roller tappet (**B&C**) in the lowest position by rotating the crankshaft. Otherwise the installation bolts may be broken because of tension of the pump spring.

Apply engine oil to the O-ring (**A**) of the high pressure fuel pump, the roller tappet (**B**), and the protrusion (**C**). (roller tappet, only if removed from cylinder head)
Also apply engine oil to the groove on the location where the protrusion (**C**) is installed.

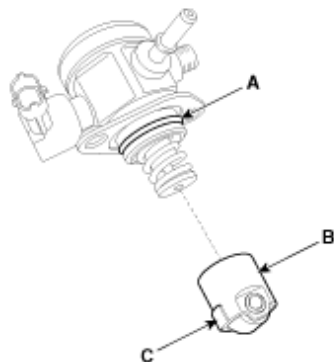

Installation bolts:

When tightening the installation bolts of the high pressure fuel pump, tighten and turn the bolts in small step (0.5 turns) after tightening them with hand-screwed torque.

High pressure petrol pump installation bolt: 12.8 ~ 14.7 N.m

Petrol pipe:

First hand-tighten the nut(s) fully until they are not fastened any more in order to have them inserted in place and then completely tighten to the specified torque using a torque wrench.

If not tightening the bolts or nuts in a straight line with the mating bolt holes or fittings, it may cause a fuel leak due to broken threads.


High pressure petrol pipe installation nut: 26.5 ~ 32.4 N.m

Installation is reverse of removal.


High pressure petrol pump installation



Replace the original high pressure petrol pump for the adapted high pressure petrol pump.
(Follow the workshop manual of the car)

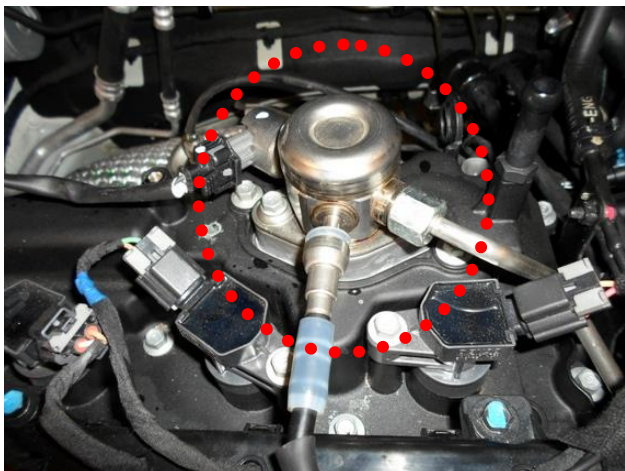


Caution! Fuel under pressure in the line.

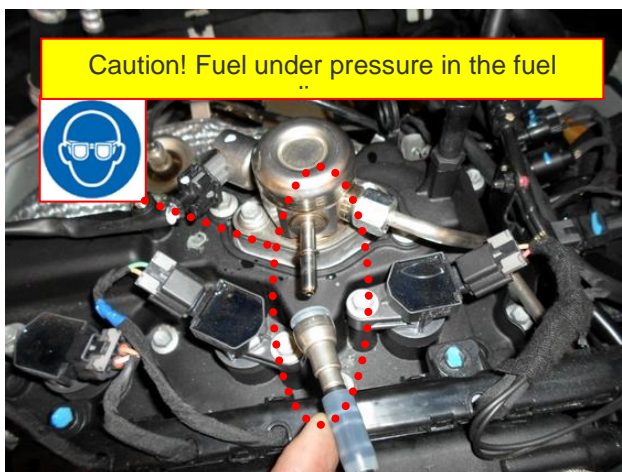

Remove the petrol fuel line



Remove the electrical connector.

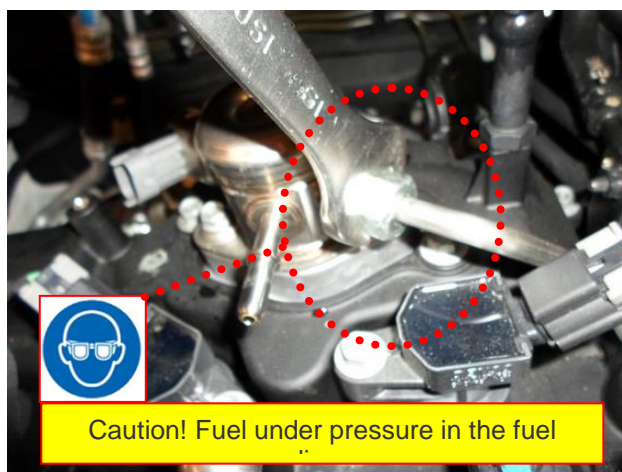

Loosen the nut of the high pressure pipe with spanner





Remove the two mounting bolts from the high pressure pump and remove the high pump from the engine.



High pressure petrol pump installation 2




Cover pump housing until the adapted high pressure pump is mounted.

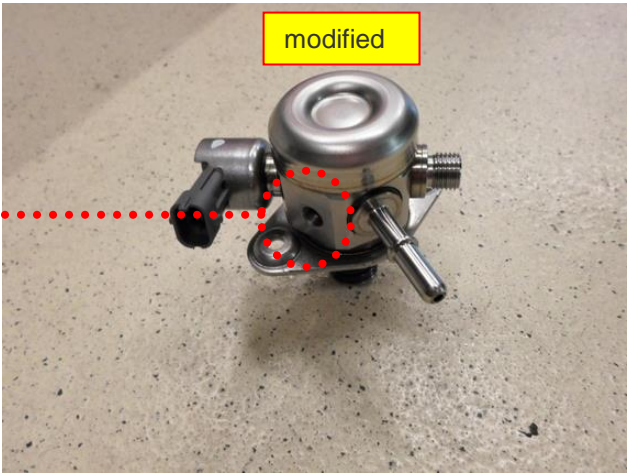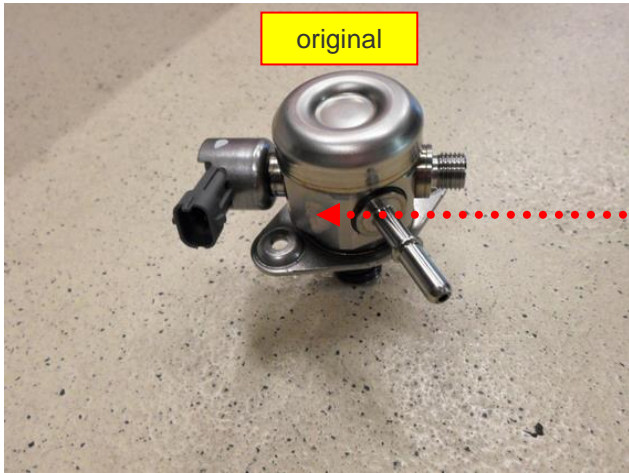

Modified high pressure pump.

High pressure petrol pump installation 3

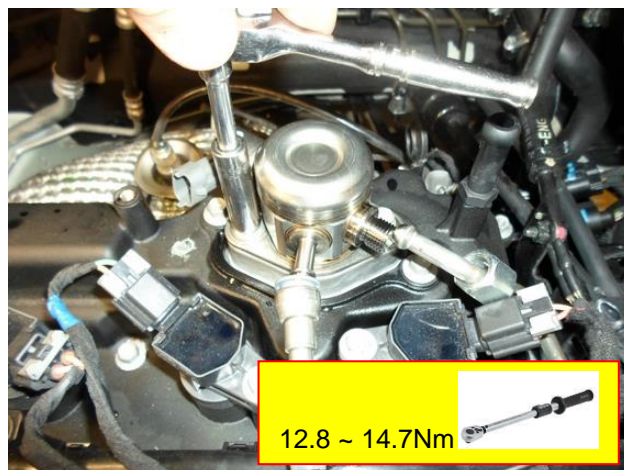

Install the adapted high pressure fuel pump.



Re-install the high pressure fuel pipe



High pressure fuel pump installation bolt:

12.8 ~ 14.7 N.m (1.3 ~ 1.5 kgf.m, 9.4 ~ 10.9 lb-ft)

High pressure fuel pipe installation nut:

26.5 ~ 32.4 N.m (2.7 ~ 3.3 kgf.m, 19.5 ~ 23.9 lb-ft)

High pressure fuel pipe function block installation bolt:


9.8 ~ 11.8 N.m (1.0 ~ 1.2 kgf.m, 7.2 ~ 8.7 lb-ft)

High pressure pump return

Mounting quick release



Quick release M10x1


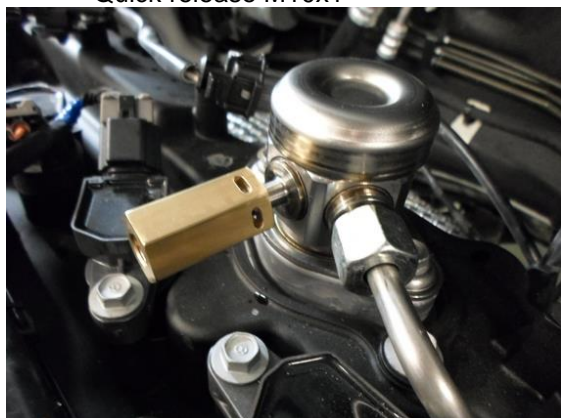


Insert the locking, and check if it is locked




Boost pump bracket

Fit the first directional valve with banjo bolt with quick release and filter with 2 bonded seals on the boost pump inlet.

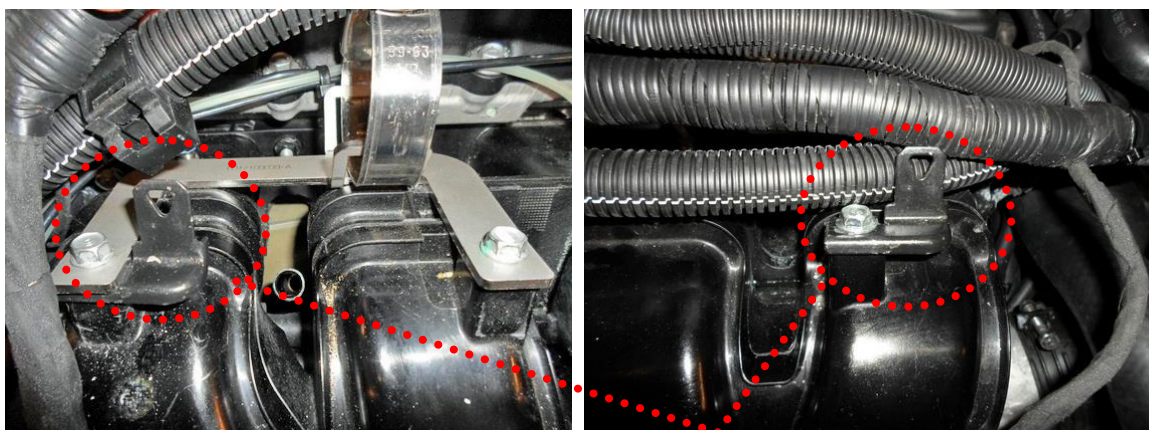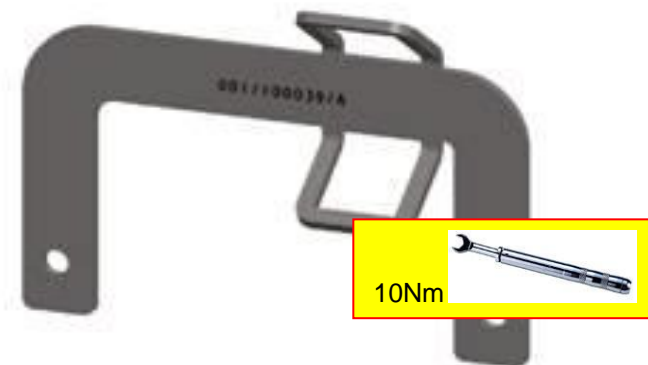


Original harness attachment points.

Connection of the fuel hose to the boost pump.

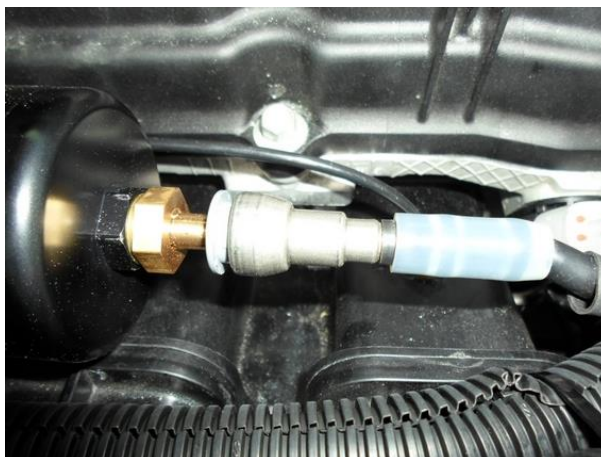


Original fuel line quick release connection.

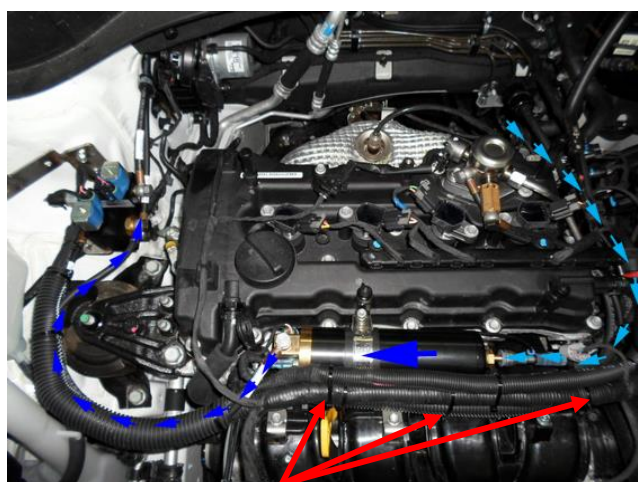

Original harness attachment points.

Remove the plastic clips, and use this plastic clip to hold the fuel lines of the LPG system in place with cable straps.

Fuel Supply Unit / Fuel Return Unit

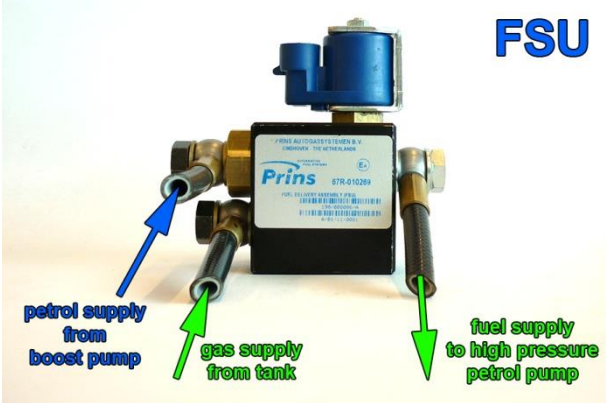


FSU

petrol supply from boost pump

gas supply from tank

fuel supply to high pressure petrol pump

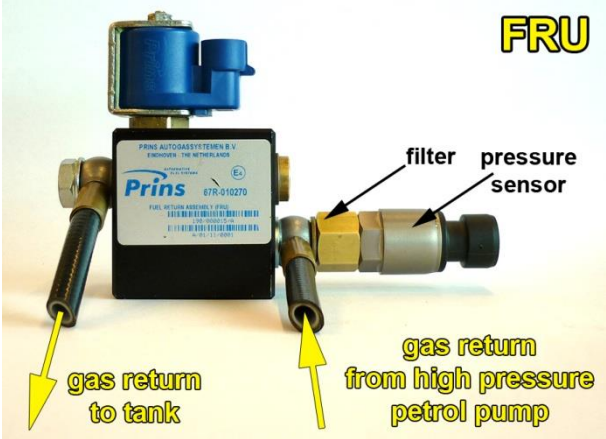


FRU

filter

pressure sensor

gas return to tank

gas return from high pressure petrol pump

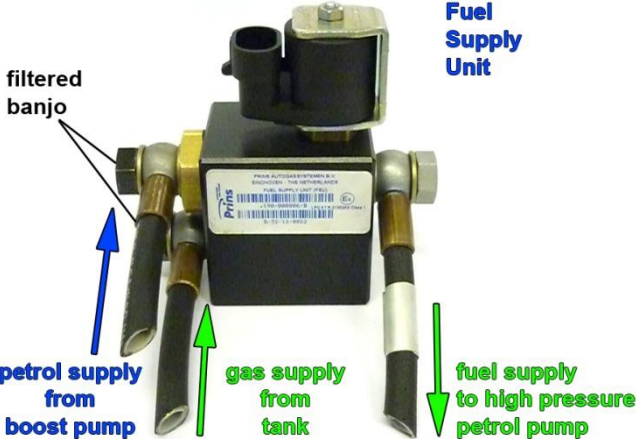


Fuel Supply Unit

filtered banjo

petrol supply from boost pump

gas supply from tank

fuel supply to high pressure petrol pump

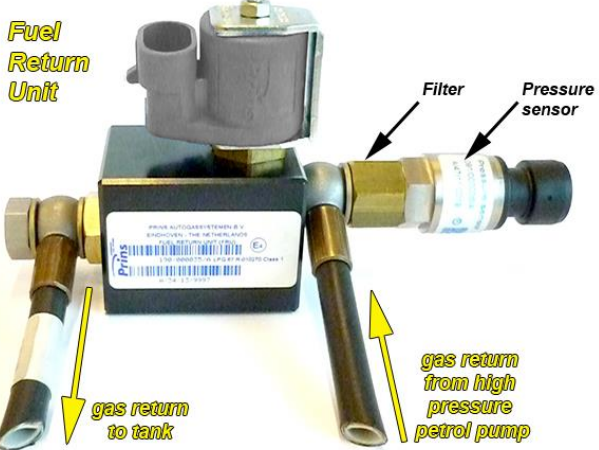

Fuel Return Unit


Filter

Pressure sensor


gas return to tank

gas return from high pressure petrol pump

Black filtered banjo will only be used on inlet connections !



PRINS AUTOGASSYSTEMEN B.V.
EINCHOVEN - THE NETHERLANDS
FUEL SUPPLY UNIT (FSU)
130-000005-3 LP-G43 N-010270 Class 1
5/12/12-0022



PRINS AUTOGASSYSTEMEN B.V.
EINCHOVEN - THE NETHERLANDS
FUEL RETURN UNIT (FRU)
130-000015-3 LP-G43 N-010270 Class 1
5/14/12-0024



Mounting the Fuel Supply and Fuel Return Unit



Mounting point for the FSU and FRU backing



Two original threaded holes M6

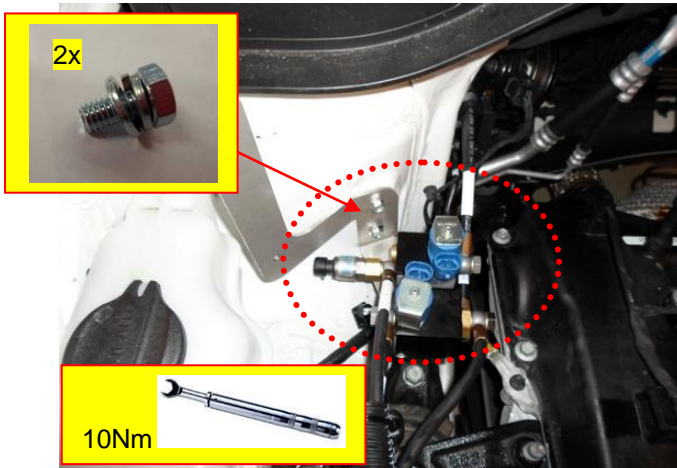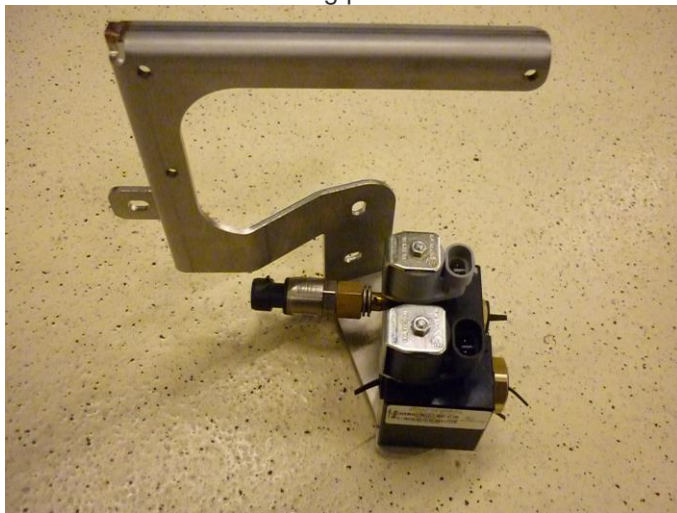

Connect the fuel lines to the FSU, FRU and valve protector banjo quick release 3mm.




Connect the wires to the pressure sensor, FSU, FRU and **Banjo quick release nipple** Valve protector connection. Valve Protector optional

Some pictures contain 1st generation units !
Be aware of correct connections

Boost pump connections



Valve Protector nipple optional.

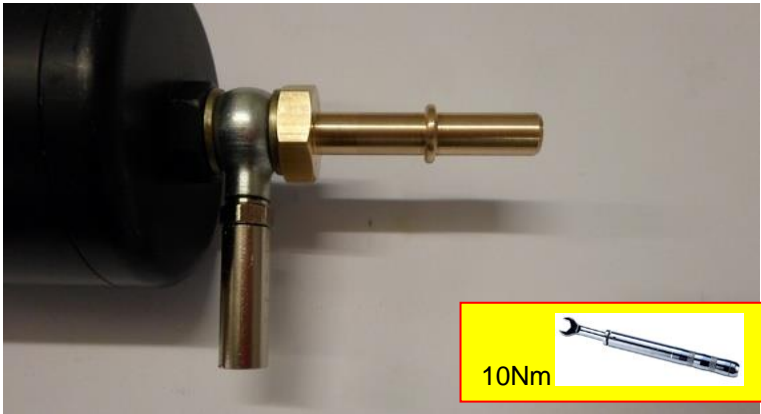

Valve Protector nipple optional.

Mounting the Valve Protector unit
optional



LPG / petrol fuel lines

Hose	from	to	Length (cm)
1 original	Adapter original petrol hose	Petrol boost pump	
2 XD3	Fuel supply unit	High pressure petrol pump	110
3 XD3	Petrol boost pump	Fuel supply unit	55
4 XD3	Fuel return unit	High pressure petrol pump	115



Install the fuel line using two bonded seal washers and banjo bolt :



Filtered banjo: (FSU supply inlets / boost pump inlet / HPP pump inlet : black filtered banjo) :







Hose routing




- Mounting fuel line with:
- P-clip Ø15mm
 - M6 nut
 - M6 Bolt x20

Fitting material fuel lines

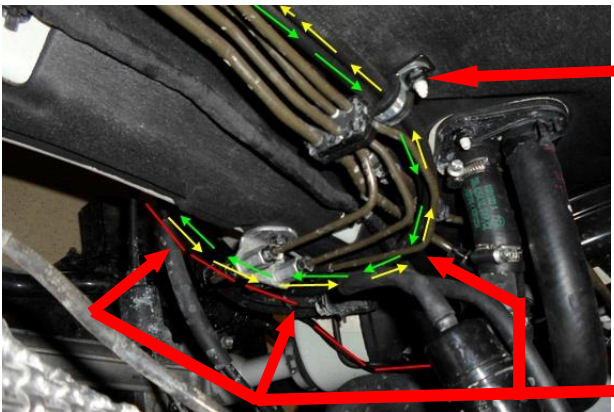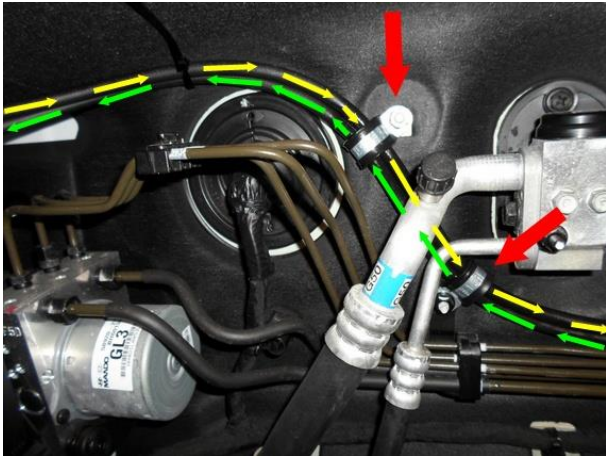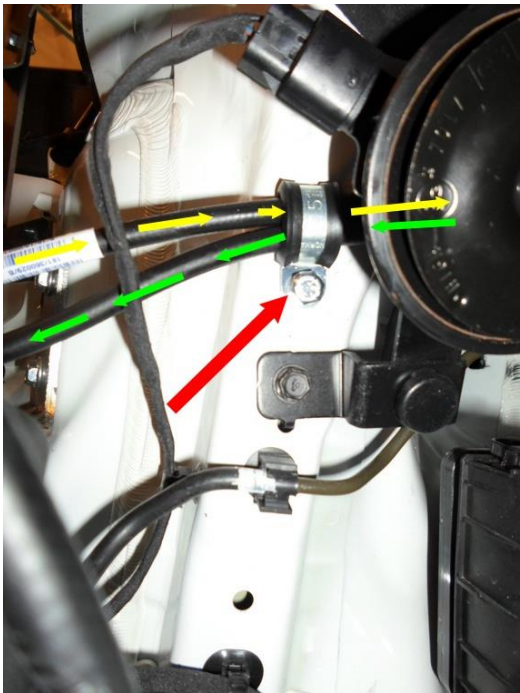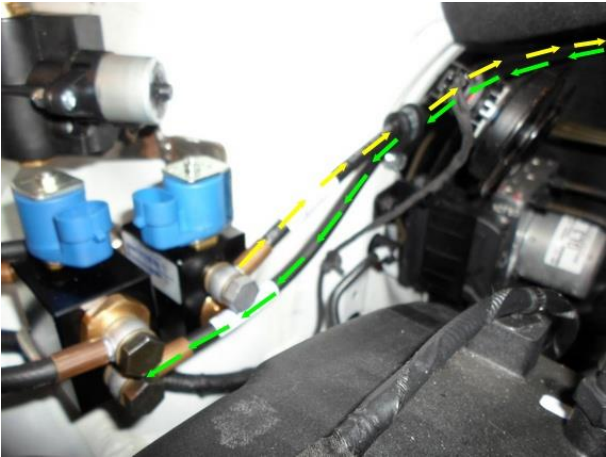


- Mounting fuel line with:
- P-clip Ø15mm
 - M6 nut
 - M6 Bolt x20

Hose routing 2

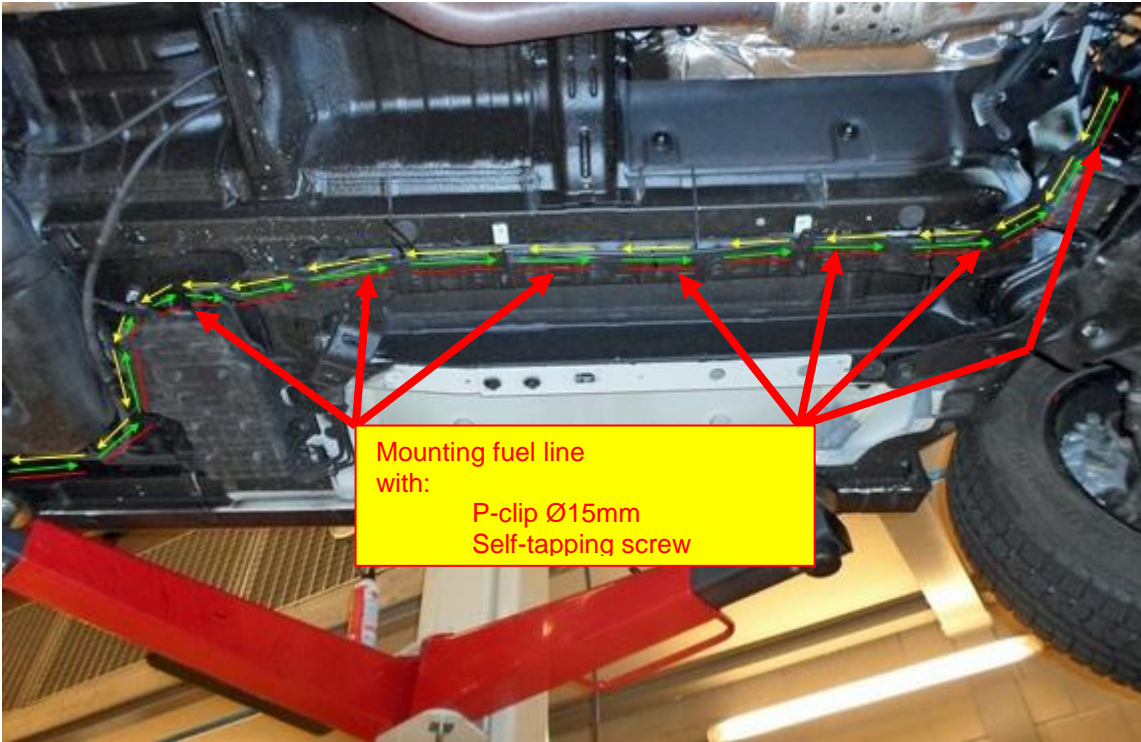


Secure the fuel line and electrical wires with cable straps against the fuel line.

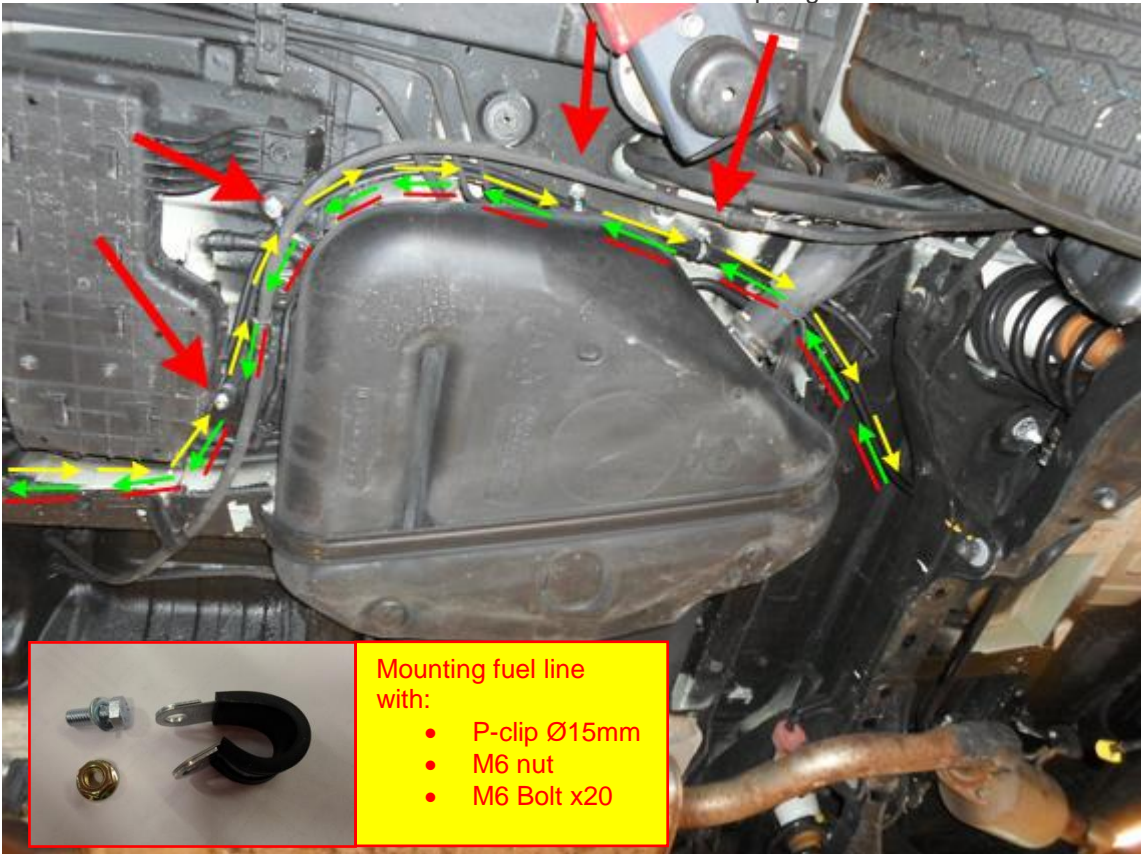

Fitting material fuel lines

Hose routing 3

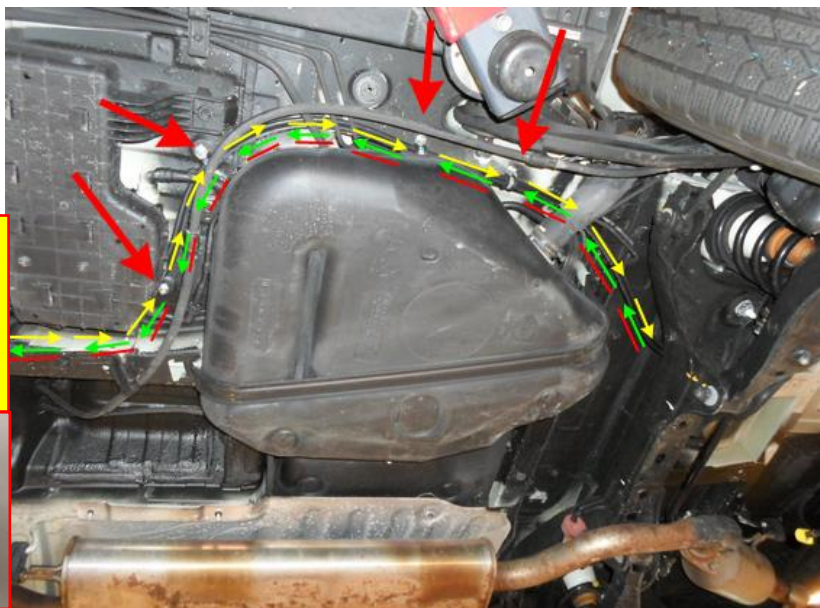


Fitting material fuel lines.



Mounting fuel line with:

- P-clip Ø35mm
- Self-tapping screw

Mounting the AFC-2.1

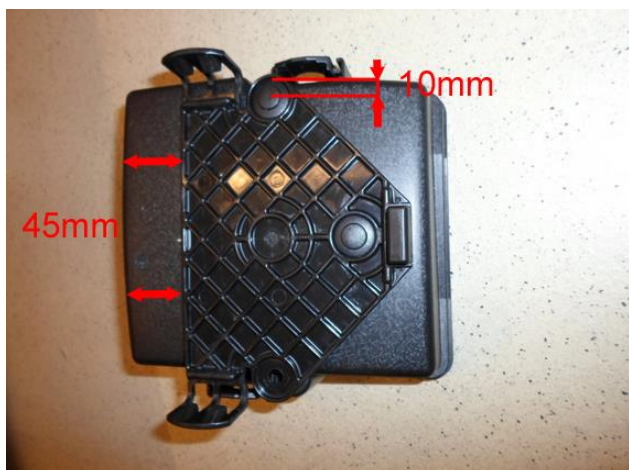

Mark the holes and drill two holes Ø8mm.



Double-sided adhesive tape.



Lock with two push pin rivets.



Seal the push pin rivets with silicone sealant.




Mounting the fuse / relay box



Mount the bracket under the fuse box.

Wiring AFC

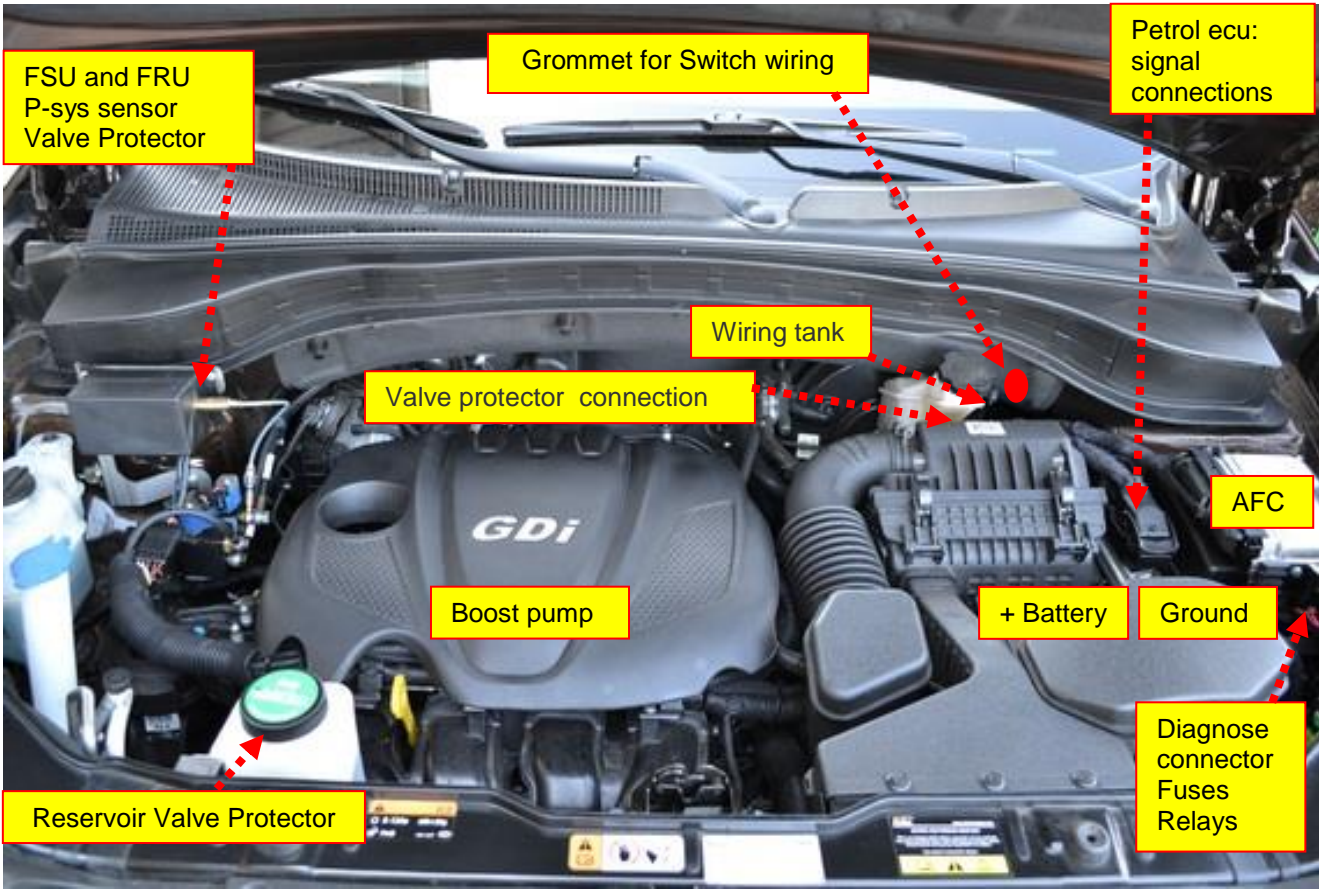



Mounting the fuel selection switch


Mount the switch, drill Ø8,2mm.



Drill a hole Ø8.2mm for the switch




Use the lock-clip

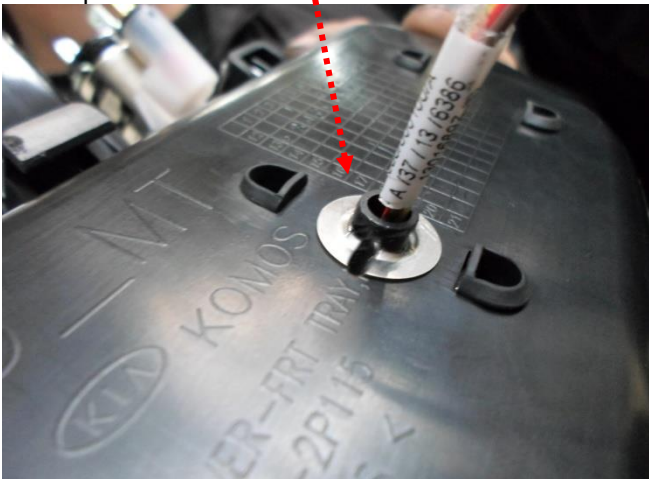




Switch connections

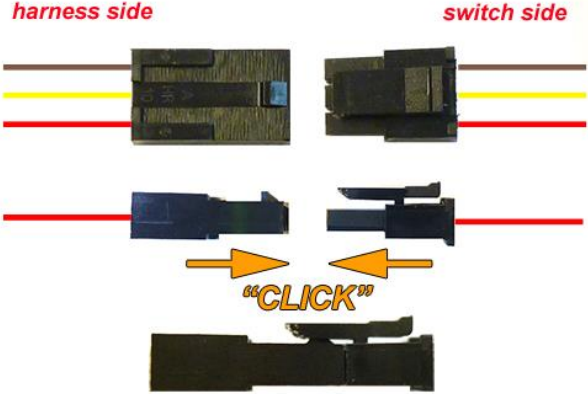
Driver room

Wire number / code	Wire colour	Connection
3-pole micro connector 66 Ground fuel switch 3 +12V fuel switch 49 LIN fuel switch	Brown-black Red-white Yellow	Connect the 3-pole connector to the Prins fuel selection switch.
		

Electrical connections

Check and measure the wiring in case of changes in the cars wiring colours.

1-32 MAIN GND ecu MAIN GROUND SENSE	Brown	Connect to the '-' of the battery (-31) ; use a ring terminal. M6 Wire location : main ground terminal, chassis side, in front of fuse box	
4 – 13 +12V BATT sense +12V BATT fused +12V BATT boost pump +12V BATT pump driver	Red	Connect to the '+' of the battery (+30) ; use a ring terminal. M8 Do not place the fuses before having completed the installation of the lpg system. Wire location : main supply battery terminal	 

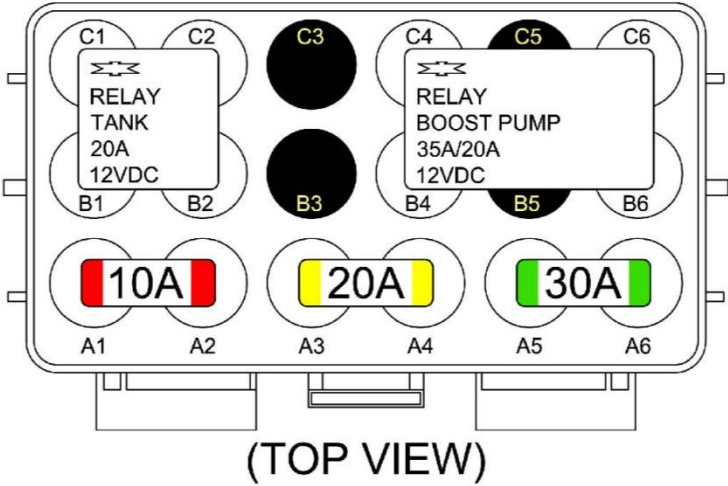

Electrical connections

Check and measure the wiring in case of changes in the cars wiring colours.

Wire number / code	Wire colour	Connection
61 DI 4	Yellow-blue	5Volt sensor supply Wire colour : Blue Wire location : Petrol ecu pin 12 connector C300A
36&25		High pressure petrol sensor signal interruption Wire colour : Brown Wire location : Petrol ecu pin 39 connector C300A
36 AD 6	Blue-brown	Sensor side
25 DAC 1	Green-white	Petrol ecu side
63 Ground Shift	Blue-orange	High pressure petrol sensor ground Wire colour : Black Wire location : Petrol ecu pin 60 connector C300A
15 T-ect	Grey	For measuring the engine coolant temperature. Wire colour : White-Black Wire location : Petrol ecu pin 63 connector C300A
18 AD 1	Blue-white	Analog in (sensor side) MAP sensor in Wire colour : Blue-light Brown Wire location : Petrol ecu pin 82 connector C300A

105	104	103	102	101	100	99	98	97	96	95	94	93	92	91	90	89	88	87	86	85
84	83	82	81	80	79	78	77	76	75	74	73	72	71	70	69	68	67	66	65	64
63	62	61	60	59	58	57	56	55	54	53	52	51	50	49	48	47	46	45	44	43
42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	24	23	22
21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1

Connector [C300-A]

91	90	89	88	87	86	85	84	83	82	81	80	79	78	77	76	75	74	73	72	71
70	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29
28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8
7	6	5	4	3	2	1														

Connector [C300-B]

Electrical connections

Check and measure the wiring in case of changes in the cars wiring colours.
Insulate not used wires.

Wire number / code	Wire colour	Connection
8 RPM engine speed	Purple-white	For measuring the engine speed signal. Wire colour : Blue Wire location : Petrol ecu pin 29 connector C300B
7 +12V IGNITION	Grey - white	Make a connection to +ignition / contact+ (+15). Do not place the fuses in the holder before having completed the installation of the lpg system. Wire colour : Green-black Wire location : Petrol ecu pin 41 connector C300B
51 CAN-High	Blue-yellow	CAN-High signal Wire colour : White Wire location : Petrol ecu pin 77 connector C300B
70 CAN-Low	Blue	CAN-Low signal Wire colour : Red Wire location : Petrol ecu pin 60 connector C300B

105	104	103	102	101	100	99	98	97	96	95	94	93	92	91	90	89	88	87	86	85
84	83	82	81	80	79	78	77	76	75	74	73	72	71	70	69	68	67	66	65	64
63	62	61	60	59	58	57	56	55	54	53	52	51	50	49	48	47	46	45	44	43
42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	24	23	22
21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1

Connector [C300-A]

91	90	89	88	87	86	85	84	83	82	81	80	79	78	77	76	75	74	73	72	71
70	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29
28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8
7	6	5	4	3	2	1														

Connector [C300-B]

Valve protector connections

4 pole super seal connector		
Connector pin 4 pole super seal	Wire colour	Wire number AFC / code
1	Yellow-pink	60 DI3
2	Blue	12 LPG level sensor
3	Grey-white	7 Ccontact+
4	Brown	1 Ground


Electrical connections

Check and measure the wiring in case of changes in the cars wiring colours.
Insulate not used wires.

Engine room

Wire number / code	Wire colour	Connection
3-pole connector		
35 Ground Psys pin A	Brown	Connect the 3-pole connector to the Psys sensor positioned into the Fuel Return Unit.
9 +5V sensor pin B	Red-blue	Sensor wire pin A
16 Psys pin C	Green	Sensor wire pin B
		Sensor wire pin C
2-pole connector FSU, black		
24 + Lock-off FSU	Yellow-green	Connect the 2-pole connector to the lock-off valve of the Fuel Supply Unit
31 C Ground	Brown-black	
2-pole connector FRU, grey		
43 + Lock-off FRU	Red-white	Connect the 2-pole connector to the lock-off valve of the Fuel Return Unit
34 C Ground	Brown-black	
4-pole diagnose connector		
46 Service TxD	Grey	Diagnose connector for service / diagnosis
65 Service RxD	Grey	Connector pin 1
68 C Ground	Brown-black	Connector pin 2
		Connector pin 4
Boost pump relay		
2 + relay boost pump	Red-white	Pin 86 of the boost pump relay C4
26 Ground BP relay	Purple-blue	Pin 85 of the boost pump relay B6
+12V fused BATT	Red 2.5mm ²	Pin 30 of the boost pump relay C6-A5
+12V Boost pump	Red 2.5mm ²	Pin 87 of the boost pump relay B4
Wiring tank pump driver relay		
57 + driver relay	Red-white	Pin 86 of the driver relay C1
73 LSS 4 tank relay	Purple-blue	Pin 85 of the driver relay B2
+12V BATT fused	Red 2.5mm ²	Pin 30 of the driver relay C2-A4
+12V driver	Red 2.5mm ²	Pin 87 of the driver relay B1

Boost pump connection

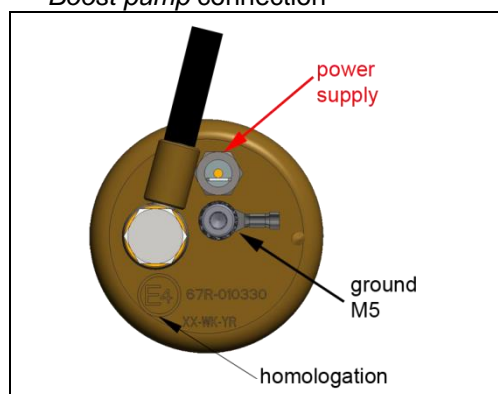

Electrical connections

Check and measure the wiring in case of changes in the cars wiring colours.
Insulate not used wires.

Lpg tank housing

Wire number / code	Wire colour	Connection
3-pole tank level connector 33 Ground tank gauge 12 Tank level in 11 + tank level supply	Brown-black Blue Red-blue	Connect the 3-pole connector to the tank level sensor.
2-pole driver connector 71 LSS 3 PWM driver 64 AD 5 driver diagnose	Purple-pink Blue-grey	Connect the 2-pole connector to the pump driver (4).
1. 2-pole connector tank lock-off	Green-yellow Brown	From tank pump driver From tank pump driver
2. 3-pole connector tank pump	Red 2.5mm ² Brown 2.5mm ²	From tank pump driver From tank pump driver
3. 2-pole connector power driver	Red 2.5mm ² Brown 2.5mm ²	From tank pump relay 87 From main ground
4. 2-pole connector driver	Green Grey	From AFC pin 71 pwm From AFC pin 64 diagnose



Checklist after installation

1. Install the system fuses.
Turn on ignition.
Connect the Prins interface wire and run the Prins diagnosis program.
When working on the car, beware of moving and rotating parts in the engine compartment (even when the engine is not running !!).
2. When commissioning the LPG system, you must activate the AFC with the diagnosis software.
3. Check whether the program in the AFC matches with the car (dedicated engine set):
See "Identification" in the diagnosis program.
4. Check all components and connections for any LPG leakage, use a LPG leak detector device or a fluid detection like soap. Also check for petrol leakage. Make sure the solenoid valves are in open position.
No evidence of leakage is permitted.
Caution for moving and rotating parts in the engine compartment !
5. Use the diagnosis software to check again all input and output signals.
6. Check the system for error codes and solve these, if required.
Check the petrol MMS for EOBD error codes.
Place the protection connector back on the diagnose connector.
7. Make a test drive and check the cars drivability on LPG and petrol.