



Installation manual

PART 2/2

MANUFACTURER	VAG
ENGINE DISPLACEMENT	1400cc
NUMBER OF VALVES	16
ENGINE CODE / NUMBER	CHPA – 103kW / CPTA – 103kW / CXSA – 90kW CZCA – 92kW / CZCB – 92kW / CZDA – 110kW / CZE A – 110kW
FIRING ORDER	1-3-4-2
VEHICLE CATEGORIES	M
TRANSMISSION	MT / AT
VERSION	AFC-2.1 DI-LPG
TYPE VSI INJECTOR	KN9 - 63cc
TYPE INJECTION MODULE	Gen2 type 2
PETROL ECU MANUFACTURER / CODE	Bosch MED 17.5.21 & 17.5.25
MODEL YEAR:	2015-
SYSTEM APPROVAL NUMBER (R115)	E4-#115R-000020 / VSI-LPG 31
LOCATION R115 SYSTEM STICKER	right side, centre door post
ENGINE SET NUMBER	366/121017/A
MANUAL	076/2619400-2
DATE	2019-10-08

Copyright © Prins Autogassystemen 2015



TABLE OF CONTENTS

Manual updates / revision..... 2

General instructions..... 3

Required equipment / tools / materials for installing a complete system 4

Vehicle check..... 4

Base diagram..... 5

VSI approval numbers 6

Overpressure / MAP connection..... 7

Mounting the inlet manifold couplings; MAP 8

Mounting the inlet manifold couplings 9

Mounting the VSI injector rail with hoses..... 10

LPG hoses 11

Wiring Diagram 12

Electrical connections - Insulate 13

Electrical connections – driver room..... 14

Electrical connections 15

Electrical connections 16

Electrical connections 17

Electrical connections 18

Checklist after installation..... 19

FOR EXPLANATION AND CIRCUIT DIAGRAMS SEE : INSTALLATION MANUAL GENERAL PART 1 / 2



Manual updates / revision

Rev. nr	Rev. Date	Subject update
1	2019-02-20	Start revision management
2	2019-10-08	Added engine codes, ECM codes & minor changes



General instructions

- The installation of the system shall be done in accordance with the installation manual provided by Prins Autogassystemen.
- This manual is based on Dutch regulations, always install the system in accordance to the local regulations.
- Always download the “general manual 1/2 “ from our website for basic instructions and diagrams.
- Always disconnect the battery when installing the LPG system. Make sure the ignition key is outside the car. Be aware of central door locking, radio / telephone memory code, alarm system.
- Do not place the main fuse into the fuse holder before having completed the installation of the VSI system.
- The VSI computer has to be activated by means of the diagnosis software.
- In the unlikely event the VSI computer fails, it will automatically switch over to petrol. Never disconnect the VSI computer connector, unless you have removed the main fuse.
- When installing the VSI wiring harness, ensure that it does not run near any of the ignition components.

Solder and insulate all electrical connections.

The wires in the loom are provided with numbers and text. The text on the wire explains the function of the wire. The wire harness is not model specific, therefore it may be necessary to adjust the length of the wires. Ensure maximum care is taken when connecting wiring.

Make professional joints using solder and shrink sleeve. Do not stretch the wiring harness.

- No component of the LPG-system shall be located within 100 mm of the exhaust or similar heat source, unless such components are adequately shielded against heat.
- Remove any internal burrs, after having shortened the LPG pipe. (This guarantees the maximum flow through the pipe without pollution.)
- If holes have to be drilled (wear safety glasses) for installing brackets, etc., the drilled holes must always be treated with an anti-corrosion agent, after the chips have been removed (especially when mounting a exterior filler into body work).
- After having completed the installation, check the whole system for gas leakage; use a gas leak detection device. Also check for leak of engine coolant, petrol and air.

ATTENTION: please check, after activation of the AFC and switching the system to LPG, if DTC's are stored in the Prins diagnostic software.

If DTC's are stored, please contact our After Sales department for a software update in relation to the CAN-BUS compatibility. aftersales@prinsautogas.com

- Fitting and maintenance is only allowed by Prins Autogassystemen selected LPG engineers.
- Failure to follow the instructions in this manual can result in a poor or non-working gas installation or a dangerous situation.
- For maintenance instructions and filter registration see owner manual.
- Prins Autogassystemen is not responsible for any damages to people or objects as a result of changes to Prins products.
- Check our website regularly for diagrams, certificates, updates, info-bulletins and product information.

Please fill in the warranty portal completely within 8 days after installation.



Required equipment / tools / materials for installing a complete system


- Complete workshop toolbox (wrenches, screwdrivers, cutters, pliers, ratchet, sockets)
- Car lift
- Portable computer
- Vehicle fuel system scan tool or OBD scan tool Prins (part nr. 099/99928)
- Exhaust gas analyser
- Multimeter
- Oscilloscope
- Prins diagnostic software
- Prins diagnostic tool
- Torque wrench (5-50Nm)
- Torque wrench (200-250Nm)
- Portable light
- Assortment drill bits 4 to 12 mm
- Assortment cutters (Ø20, 30, 50, 70 mm)
- Portable drill or pneumatic drill
- Thread cutting device (male M6x1, M8x1, M10x1)
- Air gun
- Vacuum cleaner
- Safety goggles
- Hot air gun
- Soldering iron, soldering tin
- Wire-stripping pliers
- Adhesive tape
- Adhesive sealant
- Thread locking compound
- Anti-corrosion agent / black body coating
- Gas leak detection device or foam leak spray
- Shrink sleeves

Vehicle check

- Check the vehicle drivability on petrol
- Check the fuel system for error codes (scan tool)
- Check if the catalytic converter is in good condition (exhaust gas analyser)
- Check the condition of the ignition system (spark plugs, cables, coil)



Base diagram

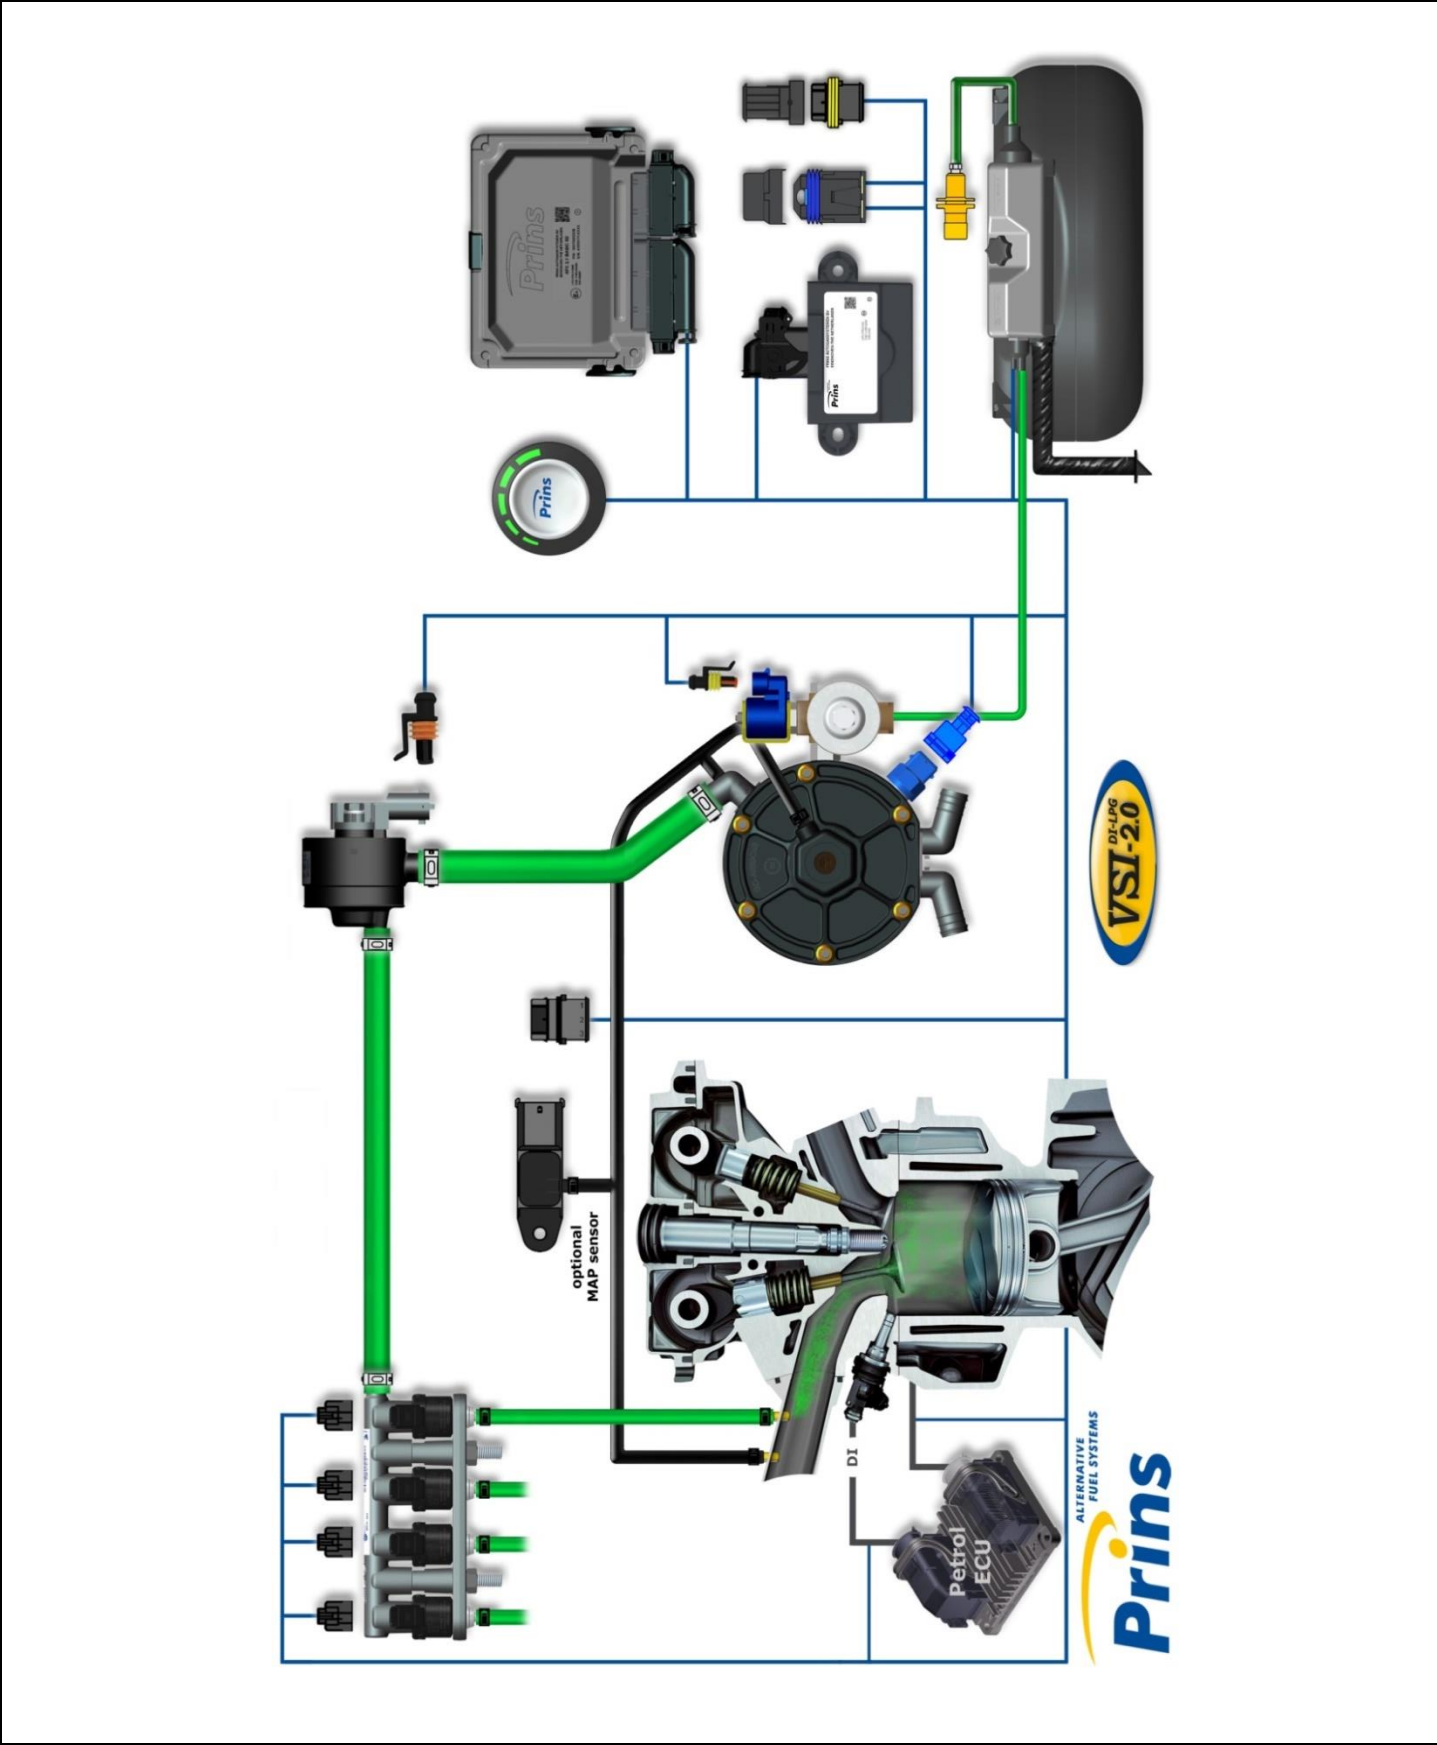


VSI approval numbers

	
<p>Reducer VSI LPG Prins : E4-67R-010054 Lock-off valve OMB : E8-67R-014327 Lock-off valve Valtek : E4-67R-010041</p>	<p>Injector rail Prins : LPG E4-67R-010093 CNG E4-110R-000021</p>
	
<p>Filter unit T1 / T2 Prins : LPG E4-67R-010096 CNG E4-110R-000028 Filter unit Keihin: LPG E4-67R-010177 CNG E4-110R-000091</p>	<p>Injector Keihin KN9 : LPG E4-67R-010310 CNG E4-110R-000295</p>
	
<p>Prins AFC : E4-67R-010098 E4-10R-030507</p>	<p>Tubithor : LPG E13-67R-010145 CNG E13-110R-000017 Rubia : LPG E4-67R-010068 CNG E4-110R-000003 WinLas : LPG E37-67R-010140 CNG E37-110R-000012</p>

Overpressure / MAP connection

Drill hole $\varnothing 5\text{mm}$, cut **M6x1** thread

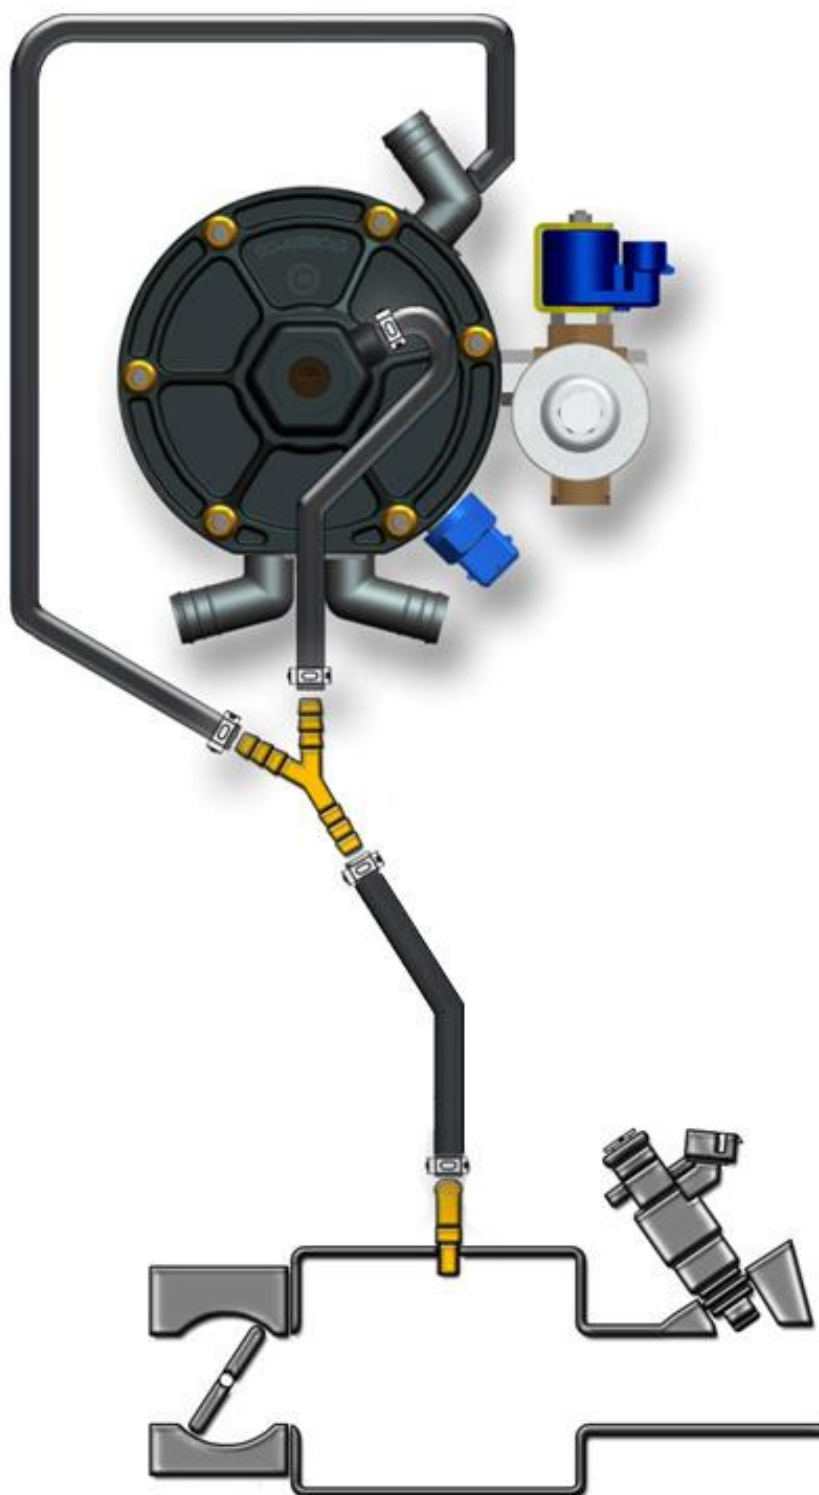

Mounting the inlet manifold couplings; MAP

Remove the inlet manifold.

Drill **5** holes of **5mm** in the inlet manifold. Cut **M6x1** thread in these holes.

Place the VSI couplings with a lock compound in the inlet manifold.

Watch out that the lock compound doesn't come inside the VSI couplings.

Place the inlet manifold back on the engine.



Mounting the inlet manifold couplings



Mounting the VSI injector rail with hoses



(With cylinder deactivation).



Option 1



Option 2

11mm hose routing



LPG hoses

Hose (Ø..mm)	From component	To component	Hose length (cm)
5	VSI injector 1	Inlet manifold coupling cyl.1	20
5	VSI injector 2	Inlet manifold coupling cyl.2	18
5	VSI injector 3	Inlet manifold coupling cyl.3	18
5	VSI injector 4	Inlet manifold coupling cyl.4	20


General info.

Cut the LPG hoses on length.

Please observe that there is no damage or fouling to the hoses.



Wiring Diagram


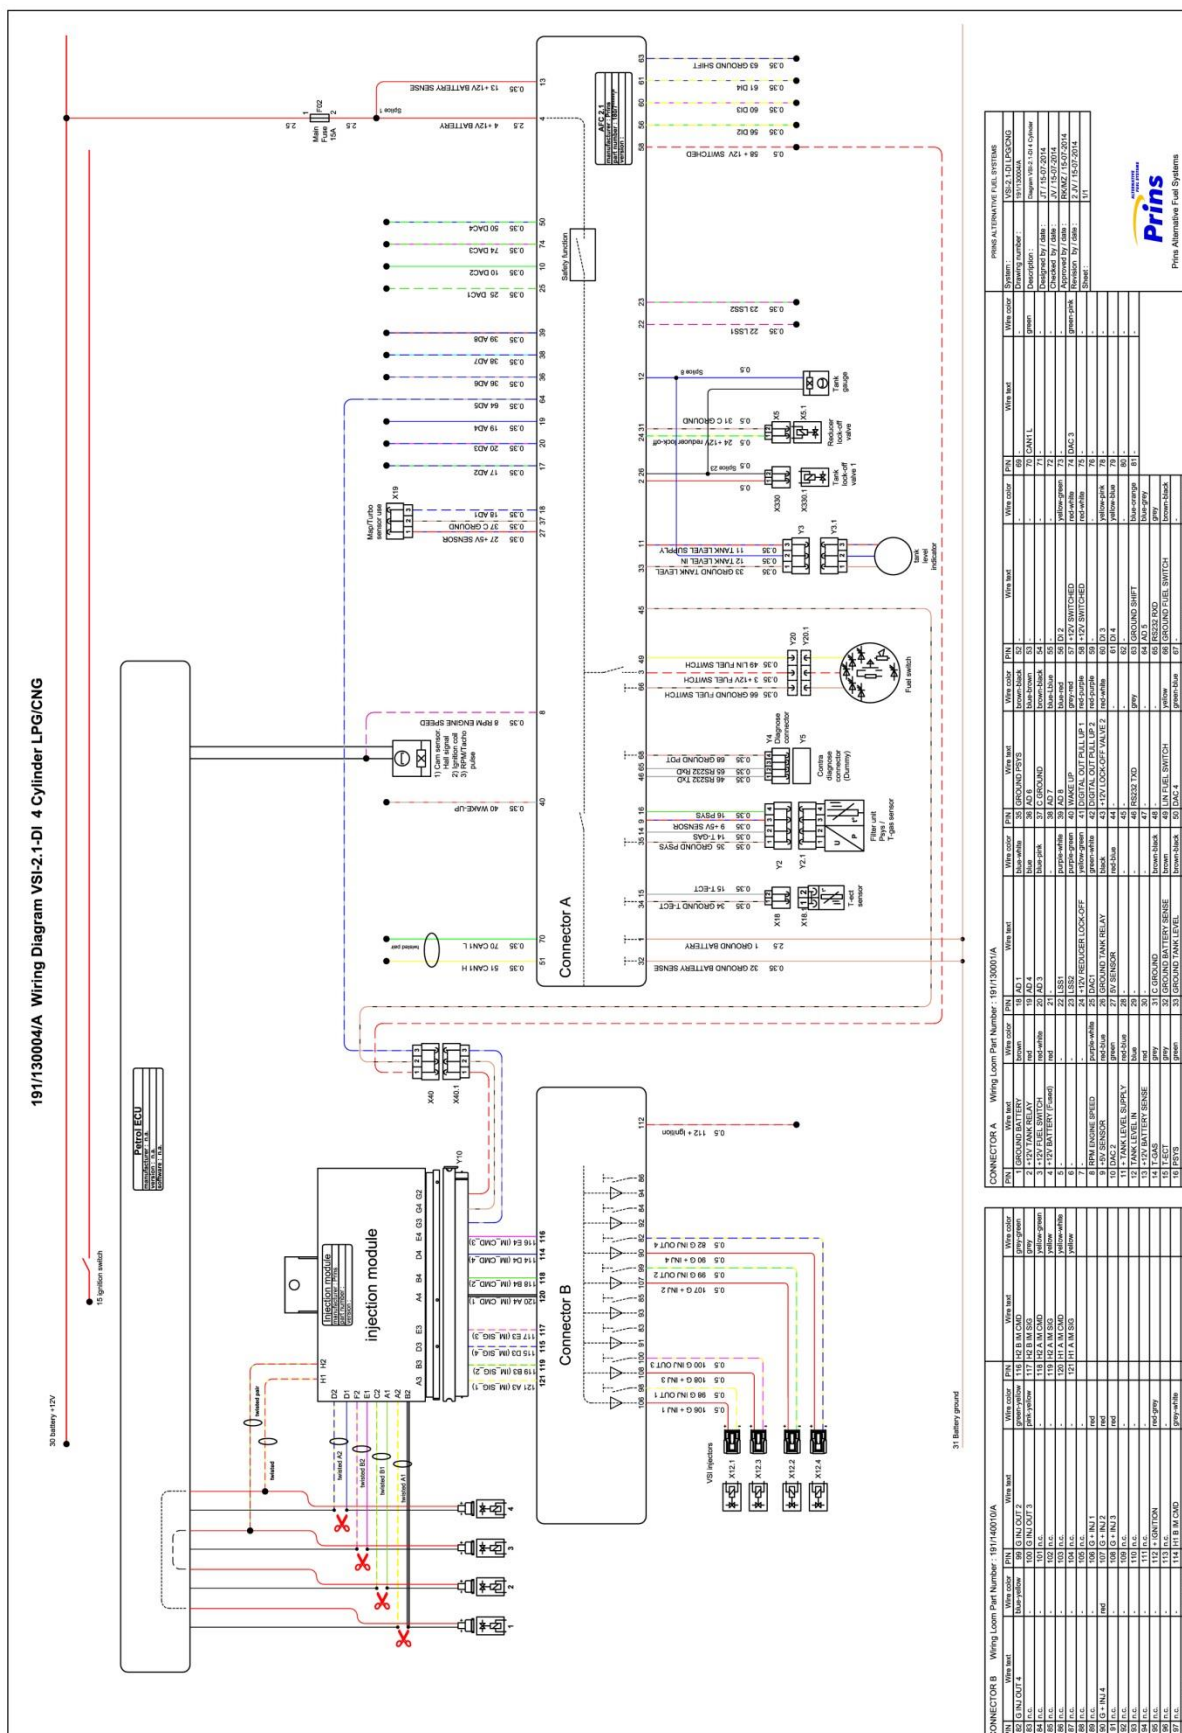


Electrical connections - Insulate

10	DAC2	Green	<i>Insulate</i>
19	AD4	Blue	<i>Insulate</i>
20	AD3	Blue-pink	<i>Insulate</i>
22	LSS1	Purple	<i>Insulate</i>
23	LSS2	Purple-green	<i>Insulate</i>
36	AD6	Blue-brown	<i>Insulate</i>
38	AD7	Blue-lightBlue	<i>Insulate</i>
39	AD8	Blue-red	<i>Insulate</i>
43	+12 Valve 2	Red-white	<i>Insulate</i>
50	DAC4	Green-blue	<i>Insulate</i>
56	DI2	Yellow-green	<i>Insulate</i>
60	DIG IN3	Yellow-pink	<i>Insulate</i>
61	DIG IN4	Yellow-blue	<i>Insulate</i>
62	C Ground	Brown-black	<i>Insulate</i>
74	DAC3	Green-pink	<i>Insulate</i>
<i>Insulate additional loose wires</i>			

Electrical connections – driver room

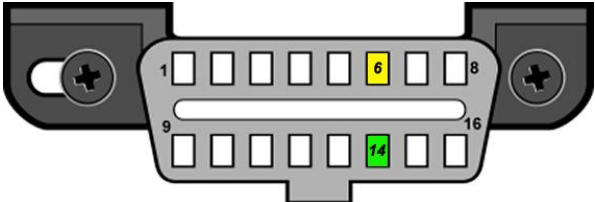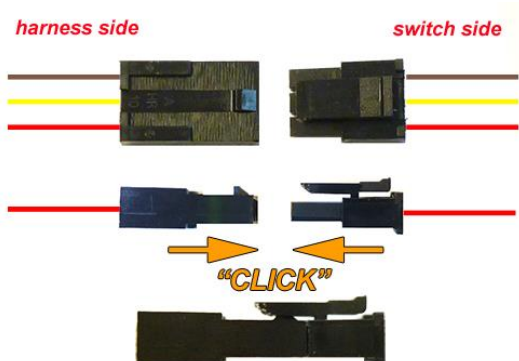

Driver room


51 70	CAN1 High CAN1 Low	Yellow Green	Connect to EOBD diagnose connector Pin : 6 Pin : 14
			
3-pole micro connector 66 3 49	Ground fuel switch +12V fuel switch LIN fuel switch	Brown-black Red-white Yellow	Connect the 3-pole connector to the Prins fuel selection switch
			



Electrical connections

Check and measure the wiring in case of changes in the cars wiring colours.

Wire number / code	Wire colour	Connection
32 Ground sense 1 Ground battery	Brown Brown	Connect to the '-' of the battery; use a ring terminal:  <i>Example</i>
4 +12V Battery	Red	Do not place the fuse in the holder before having completed the installation of the LPG system.  <i>Example</i>
98 98 G INJ OUT 1 106 106 G + INJ 1	White-yellow red	Connector VSI-injector to cylinder 1. Timing belt side
99 99 G INJ OUT 2 107 107 G + INJ 2	Green-yellow red	Connector VSI-injector to cylinder 2.
100 100 G INJ OUT 3 108 108 G + INJ 3	Pink-yellow red	Connector VSI-injector to cylinder 3.
82 82 G INJ OUT 4 90 90 G + INJ 4	Blue-yellow red	Connector VSI-injector to cylinder 4.

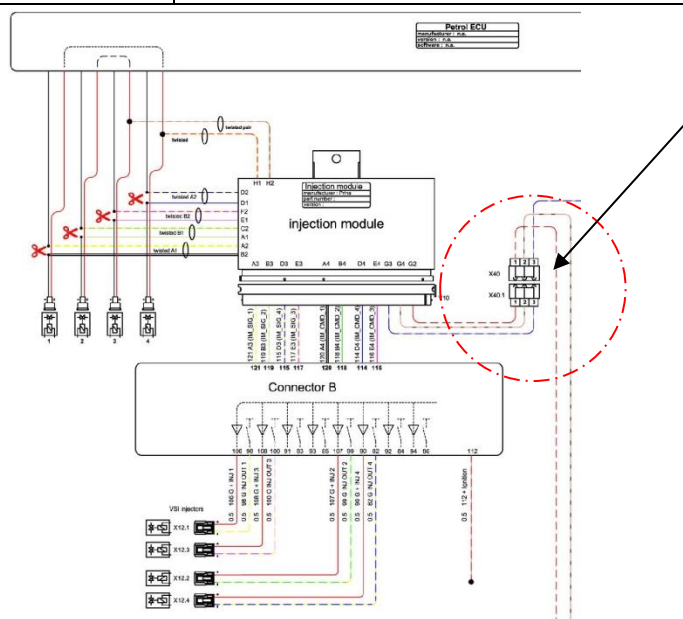

Electrical connections**PIN-outs are LEADING**

27 +5V Sensor 37 C ground	Red-blue Brown-black	For measuring the inlet manifold pressure (MAP). Not used → Cut-off connector, insulate wire Not used → Cut-off connector, insulate wire
18 AD1	Blue-white	Wire colour : Black Wire location : petrol ecu, T60 , pin 8
40 Wake-up	Grey-red	High pressure petrol sensor 5Volt supply / car wake-up Wire colour : Yellow-red Wire location : petrol ecu, T60 , pin 3
17 AD2 25 DAC1	Blue-green Green-white	High pressure petrol sensor signal interruption. Sensor side. ECU side. Wire colour : Red-yellow Wire location : petrol ecu, T60 , pin 10
8 RPM engine speed	Purple-white	For measuring the engine speed. Wire colour : Brown-yellow Wire location : petrol ecu, T60 , pin 21
63 Ground shift	Blue-orange	High pressure petrol sensor signal ground. Wire colour : Brown Wire location : petrol ecu, T60 , pin 28
112 + Ignition	Red-grey	Make a connection to ignition + / contact +. Do not place the fuse in the holder before having completed the installation of the LPG system. Wire colour : black-violet / grey-black / black-white. Wire location : petrol ecu, T94 , pin 87 PIN = Leading !



Electrical connections

Connectors in wiring loom

2-pole blue connector 15 T-ECT 34 Ground T-ECT	Grey Brown - black	<i>For measuring the engine coolant temperature (Tect)</i> Connect the connector to the reducer temperature sensor.
4-pole connector 35 Ground Psys 14 T-Gas 9 +5 Volt sensor 16 Psys	Brown - black Grey Red - blue green	<i>For measuring gas pressure and temperature.</i> Connect the connector to the filter unit sensor.
2-pole connector 24 +12V reducer lock-off 31 C Ground	Yellow - green Brown - black	Connect the connector to the reducer lock-off valve.
4-pole connector 46 Service TxD 65 Service RxD 68 Ground PDT	Grey Grey Brown - black	<i>Diagnose connector.</i>
Tank wiring loom 2 +12V Tank relay 12 Tank level IN 26 Ground tank relay	red blue black	Connect to the tank lock-off. Connect the tank level gauge. Connect to the tank lock-off.
Wiring loom link 45 C ground 58 +12V switched 64 AD5	Brown – black Red – white Blue - grey	Connection from AFC connector A to connector B

Optional:

3-pole connector 11 + manometer 12 tank level in 33 ground manometer	red blue brown	<i>Cut off connector and insulate wires</i>
---	----------------------	--

Checklist after installation

1. Connect the Prins Diagnostic Tool and run the VSI diagnostic program.
Install the VSI fuse, turn the ignition key in the accessory position.
When working on the car, beware of moving and rotating parts in the engine compartment.
2. When commissioning the LPG system, you must activate the VSI computer with the diagnostic software.
When the VSI computer has not been activated, the switch will keep blinking. To activate the VSI computer, select function activate ECM in the diagnostic software.
3. Check whether the program in the VSI computer matches with the car (dedicated engine set) :
Refer the car description in the diagnostic software (Basic → Identification) and compare these with the set number.
4. The system will switch over to LPG as soon as the temperature of the coolant becomes higher than parameter 70 - Switch over ECT.
5. Check all components and connections for any gas leakage (use a LPG leak detector device or a fluid detection like soap). Caution for moving and rotating parts in the engine compartment !
6. Let the engine run warm on petrol >80°C.
Check if the evaporator heats up.
Check the engine signals, petrol injection time, RPM, ECT, lambda, MAP signal, petrol pressure signal.
Let the engine run idle on LPG.
Adjust the evaporator pressure. Refer to Basic → System in the diagnostic software for the idle level value set.
Adjust the evaporator pressure in such a way that the pressure measured (P-sys) equals the idle level value.
Turn the socket-head screw at the front of the evaporator to adjust the pressure.
An error code will be generated whenever the pressure variation is too high.
7. Use the diagnostic software to check again all input and output signals.
8. Check the system for error codes and solve these, if required.
Check the petrol ECM for EOBD error codes.
Place the protection connector on the VSI communication connector.
9. Take a test drive and check the drivability on LPG and petrol.

ATTENTION: please check, after activation of the AFC and switching the system to LPG, if DTC's are stored in the Prins diagnostic software.

If DTC's are stored, please contact our After Sales department for a software update in relation to the CAN-BUS compatibility. aftersales@prinsautogas.com

